



**ALLIED MACHINE  
& ENGINEERING**

**WOHLHAUPTER®**

Holemaking Solutions for Today's Manufacturing



Boring



Reaming



Burnishing



Threading



Specials



## T-A® Drilling System

► *DRILLING*

Replaceable Insert Drilling System



SECTION

---

# A30

---

T-A® Drilling System

# T-A<sup>®</sup> Drilling System

Replaceable Insert Drilling System | T-A<sup>®</sup> | GEN2 T-A<sup>®</sup>

► **Diameter Range:** 9.50 mm - 160.00 mm (0.374" - 6.299")



## This is Not Yesterday's Spade Drill

The T-A drilling system is an innovation inspired by the Universal replaceable spade insert drilling system. However, with the development of the GEN2 T-A insert, along with the countless geometry options for the T-A, this drilling system provides benefits and performance that spade blade inserts of the past never could.

With constant innovations in holder designs, insert geometries and coatings, and coolant dispersion, the T-A drilling system continues to evolve and become much more productive and powerful than ever before.

Your safety and the safety of others is very important. This catalogue contains important safety messages. Always read and follow all safety precautions.



This triangle is a safety hazard symbol. It alerts you to potential safety hazards that can cause tool failure and serious injury.

When you see this symbol in the catalogue, look for a related safety message that may be near this triangle or referred to in the nearby text.

There are safety signal words also used in the catalogue. Safety messages follow these words.

### **WARNING**

**WARNING** (shown above) means that failure to follow the precautions in this message could result in tool failure and serious injury.

**NOTICE** means that failure to follow the precautions in this message could result in damage to the tool or machine but not result in personal injury.

**NOTE** and **IMPORTANT** are also used. These are important that you read and follow but are not safety-related.

Visit [www.alliedmachine.com](http://www.alliedmachine.com) for the most up-to-date information and procedures.

Excellent hole size and finish	Optimizes chip evacuation	Wide range of geometry options available
--------------------------------	---------------------------	--

## Applicable Industries



Aerospace



Agriculture



Automotive



Firearms



General Machining



Oil & Gas




Renewable Energy



# T-A® Drilling System Contents


## Reference Icons

The following icons will appear throughout the catalogue to help you navigate between products.




### T-A Inserts

Refers to the range of inserts that connect with the corresponding holders




### Available Insert Geometries

Details for the different geometry options available for each T-A insert style



### T-A Holders

Refers to the range of holders that connect with the corresponding inserts



### Rotary Coolant Adapter (RCA) Information

Detailed instructions and information regarding the corresponding part(s)




### T-ACR 45 Chamfer Rings

Refers to the range of T-ACR 45 chamfer rings available for the corresponding holders



### Technical Information

Detailed instructions and information regarding the corresponding part(s)



### Recommended Cutting Data

Speed and feed recommendations for optimum and safe drilling



### Through Coolant Option

Indicates that the product is through coolant

Series	Diameter Range	
	Metric (mm)	Imperial (inch)
<b>Y</b>	9.50 - 11.07	0.374 - 0.436
<b>Z</b>	11.10 - 12.95	0.437 - 0.510
<b>0</b>	12.98 - 17.65	0.511 - 0.695
<b>1</b>	17.53 - 24.38	0.690 - 0.960
<b>2</b>	24.41 - 35.05	0.961 - 1.380
<b>3</b>	34.36 - 47.80	1.353 - 1.882
<b>4</b>	46.99 - 65.28	1.850 - 2.570
<b>5</b>	62.38 - 76.20	2.456 - 3.000
<b>6</b>	76.22 - 89.08	3.001 - 3.507
<b>7</b>	89.10 - 101.60	3.508 - 4.000
<b>8</b>	101.63 - 160.00	4.001 - 6.299

## Introduction Information

T-A Inserts Overview . . . . .	2 - 3
T-A Insert Geometries . . . . .	4 - 6
T-A Holders Overview . . . . .	7
Technical Information . . . . .	8 - 9
Product Nomenclature . . . . .	10 - 11

## T-A Drill Series

Y Series . . . . .	12 - 21
Z Series . . . . .	22 - 31
0 Series . . . . .	32 - 43
1 Series . . . . .	44 - 57
2 Series . . . . .	58 - 73
3 Series . . . . .	74 - 85
4 Series . . . . .	86 - 93
5 and 6 Series . . . . .	94 - 101
7 and 8 Series . . . . .	102 - 109

## T-A Drill Adapters

Rotary Coolant Adapters (RCA) . . . . .	110
T-ACR 45 Chamfer Rings . . . . .	111

## Recommended Cutting Data

Metric  
(mm)

GEN2 T-A® . . . . .	112 - 115
T-A . . . . .	116 - 119
Flat Bottom Geometry . . . . .	120 - 123
Diamond Coating . . . . .	124
Tap Drill Information . . . . .	125
Coolant Recommendations . . . . .	126 - 127

Imperial  
(inch)















GEN2 T-A . . . . .	128 - 131
T-A . . . . .	132 - 135
Flat Bottom Geometry . . . . .	136 - 139
Diamond Coating . . . . .	140
Tap Drill Information . . . . .	141
Coolant Recommendations . . . . .	142 - 143

## Troubleshooting Guide . . . . . 144 - 145

## Deep Hole Drilling Guidelines . . . . . 146

T-A Drilling System Overview | Drill Inserts















A  
DRILLING

Series	Y Series	Z Series	0 Series	1 Series	2 Series	3 Series	4 Series
GEN2 T-A®							
D <sub>1</sub> mm	9.50 - 11.07	11.10 - 12.95	12.98 - 17.65	17.53 - 24.38	24.41 - 35.05	34.36 - 47.80	46.99 - 65.28
D <sub>1</sub> inch	0.374 - 0.436	0.437 - 0.510	0.511 - 0.695	0.690 - 0.960	0.961 - 1.380	1.353 - 1.882	1.850 - 2.570
Half Series Option*							
HSS Substrates	Super Cobalt	Super Cobalt	Super Cobalt	Super Cobalt	Super Cobalt	HSS Super Cobalt Premium Cobalt	HSS Super Cobalt
Carbide Substrates	K35 (C1) K20 (C2)	K35 (C1) K20 (C2)	K35 (C1) K20 (C2)	K35 (C1) K20 (C2)	K35 (C1) K20 (C2)	-	-
Coatings	AM200® AM300®	AM200® AM300®	AM200® AM300®	AM200® AM300®	AM200® AM300®	AM200® TiN	AM200® TiN

\*See page A30: 7 for more information regarding half series options

B  
BORING

C  
REAMING






Series	Y Series	Z Series	0 Series	1 Series	2 Series	3 Series	4 Series
T-A							
D <sub>1</sub> mm	9.50 - 11.07	11.10 - 12.95	12.98 - 17.65	17.53 - 24.38	24.41 - 35.05	34.36 - 47.80	46.99 - 65.28
D <sub>1</sub> inch	0.374 - 0.436	0.437 - 0.510	0.511 - 0.695	0.690 - 0.960	0.961 - 1.380	1.353 - 1.882	1.850 - 2.570
Half Series Option*							
HSS Substrates	Super Cobalt Premium Cobalt	Super Cobalt Premium Cobalt	Super Cobalt Premium Cobalt	HSS Super Cobalt Premium Cobalt	HSS Super Cobalt Premium Cobalt	Super Cobalt	Super Cobalt
Carbide Substrates	K20 (C2) K10 (C3) P40 (C5) N2	K20 (C2) K10 (C3) P40 (C5) N2	K20 (C2) K10 (C3) P40 (C5) N2	K20 (C2) K10 (C3) P40 (C5) N2	K20 (C2) K10 (C3) P40 (C5) N2	K20 (C2) P40 (C5)	-
Coatings	TiN TiAlN TiCN	TiN TiAlN TiCN	TiN TiAlN TiCN	TiN TiAlN TiCN	TiN TiAlN TiCN	TiN	TiN

\*See page A30: 7 for more information regarding half series options









D  
BURNISHING



E  
THREADING

X  
SPECIALS

Drill Insert Coatings				
 <p><b>AM300®</b></p> <ul style="list-style-type: none"> <li>Increased heat resistance over AM200® coating</li> <li>Up to 20% increased tool life over AM200 coating</li> <li>Provides superior tool life at high penetration rates</li> <li>Color: copper/orange</li> </ul>	 <p><b>AM200®</b></p> <ul style="list-style-type: none"> <li>First choice for increased heat resistance over TiN, TiCN, and TiAlN with improved wear capabilities</li> <li>Allows for improved tool life and higher penetration rates</li> <li>Over 20% increase in tool life compared to TiAlN coating</li> <li>Color: copper/bronze</li> </ul>	 <p><b>TiN</b></p> <ul style="list-style-type: none"> <li>General purpose coating</li> <li>Improved tool life over non-coated inserts</li> <li>Excellent choice for aluminium</li> <li>Color: gold/yellow</li> </ul>	 <p><b>TiAlN</b></p> <ul style="list-style-type: none"> <li>Excellent choice for wear resistance over high surface speeds</li> <li>Excellent oxidation resistance</li> <li>Maximum working temperature 800°C</li> <li>Color: violet/grey</li> </ul>	 <p><b>TiCN</b></p> <ul style="list-style-type: none"> <li>Excellent choice for wear resistance over low surface speeds</li> <li>High hardness/wear resistance</li> <li>Maximum working temperature 400°C</li> <li>Color: blue/grey</li> </ul>

A  
DRILLING  
B  
BORING  
C  
REAMING  
D  
BURNISHING  
E  
THREADING  
X  
SPECIALS

5 Series	6 Series	7 Series	8 Series
			
62.38 - 76.20	76.22 - 89.08	89.10 - 101.60	101.63 - 114.48
2.456 - 3.000	3.001 - 3.507	3.508 - 4.000	4.001 - 4.507
			
HSS Super Cobalt	HSS Super Cobalt	HSS Super Cobalt	HSS Super Cobalt
-	-	-	-
AM200® TiN	AM200® TiN	AM200® TiN	AM200® TiN

5 Series	6 Series	7 Series	8 Series
			
62.38 - 76.20	76.22 - 89.08	89.10 - 101.60	101.63 - 160.00
2.456 - 3.000	3.001 - 3.507	3.508 - 4.000	4.001 - 6.299
			
HSS Super Cobalt	HSS Super Cobalt	HSS Super Cobalt	HSS Super Cobalt
-	-	-	-
TiN	TiN	TiN	TiN

Drill Insert Grades			
<p><b>HSS (T-A / GEN2 T-A®)</b></p> <p>First choice for general purpose use. Suited for difficult machining applications with low rigidity, as well as deep hole drilling. Recommended for drilling most steels, cast irons, and aluminium alloys up to 275 BHN.</p>	<p><b>HSS Super Cobalt (T-A / GEN2 T-A)</b></p> <p>Suited for good-to-rigid machining applications, used for drilling exotic and high-alloy materials, or general use when surface speed needs to be increased. For use in material hardness up to 350 BHN.</p>	<p><b>HSS Premium Cobalt (T-A / GEN2 T-A)</b></p> <p>Suited for rigid machining applications, used for drilling exotic and high alloy materials, or general use when surface speed needs to be increased. For material hardness up to 400 BHN.</p>	<p><b>Carbide P40 (C5) (T-A only)</b></p> <p>Excellent for drilling free-machining steel, low/medium-carbon steels, alloy steels, high-strength steels, tool steels, and hardened steels.</p>
<p><b>Carbide K10 (C3) (T-A only)</b></p> <p>Designed for drilling grey/white cast irons. The special geometry offers substantial increase in penetration rates and provides exceptional edge strength and tool life.</p>	<p><b>Carbide K20 (C2) (T-A / GEN2 T-A)</b></p> <p>Excellent for drilling high-temperature alloys, titanium alloys, cast aluminium, SG/nodular cast iron, grey/white iron, aluminium bronze, brass, copper, and certain stainless steels.</p>	<p><b>Carbide K35 (C1) (GEN2 T-A only)</b></p> <p>Excellent for drilling free-machining steels, low/medium-carbon steels, alloy steels, high-strength steels, tool steels, and hardened steels.</p>	<p><b>Carbide N2 (T-A only)</b></p> <p>Allied's N2 carbide is used with CVD diamond coating. This improves the insert's hardness, durability, and performance, which extends tool life between 30 - 50x over uncoated carbide.</p>

## Insert Geometries


### There's a Geometry for That

Allied Machine knows there isn't a universal solution when it comes to holemaking. To better accommodate the countless holes our customers drill, we have developed multiple geometry options with new geometries in development at all times.


If you're unsure which geometry would be best for your application, give our Application Engineers a call. They're standing by ready to point you in the right direction.

+44 (0) 1384 400 900


engineering.eu@alliedmachine.com

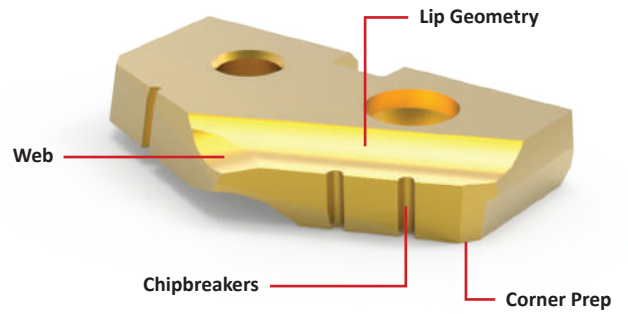

GEN2 T-A® Drill Inserts

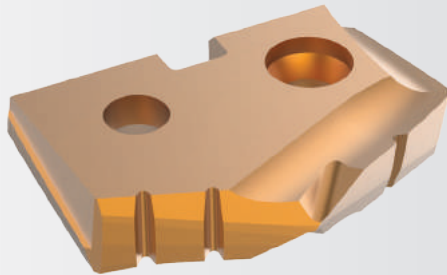


T-A Drill Inserts

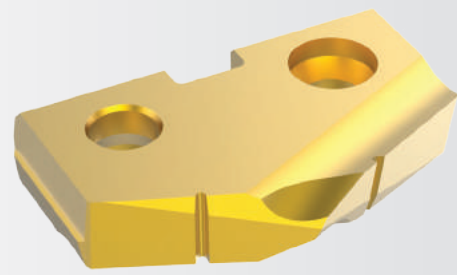


#### Standard

- Offers substantial increases in penetration rates and tool life
- Improves centering, drill stability, chip formation, and lowers drill forces
- Provides smoother breakout on through hole applications




#### Standard

- Offers excellent penetration rates and tool life
- Smooth break-out on through holes
- Increases drill stability and chip formation
- Ideally suited for low-to-high rigidity machining applications




#### High Efficiency (-HE)

- Excellent chip formation in materials with very high elasticity/ductility and poor chip forming conditions
- Effective in lower-powered machines
- Material example: low-carbon steel (not suitable for stainless steel)




#### Tiny Chip (-TC)

- Unique lip and point design for excellent chip control
- Improved capabilities in long-chipping materials such as low-carbon steels and soft alloy steels
- Enhanced performance in lower-powered machines for better chip formation at lower feed rates




#### Corner Radius (-CR)

- Improves exit burrs
- Excellent surface finish in most applications
- Improves heat dispersion and tool life
- Can be used in addition to other geometries (as a special)



#### Special Corner Preparation (-SK)


- Ideal for machining cast iron materials
- Larger than a standard corner clip
- Improves heat resistance
- Standard feature on CI, HI, and HR geometries



continued on next page


**Cam Point (-CP)**

- Helical cam ground point
- Improves drill stability and centering characteristics
- Reduces bell-mouthing when using longer holders
- Target materials: steels, cast/forged steels, cast iron




**Notch Point® (-NP)**

- Reduces bellmouth and lead-off
- Increases stability in deep hole applications
- Reduces thrust
- Can be used in addition to other geometries like cast iron, high rake, and high impact




**High Impact (-HI)**

- Designed for materials with hardness > 700 N/mm<sup>2</sup> (200 BHN)
- Enhances chip formation in materials with high elasticity/ductility and poor chip forming characteristics
- SK corner clip improves tool life
- Target materials: structural/cast and forged steels (not suitable for stainless steel)




**High Impact Notch Point® (-IN)**

- Combination of high impact and Notch Point geometries
- Increases stability in deep hole applications
- Enhances chip formation in materials with high elasticity/ductility and poor chip forming characteristics




**High Rake (-HR)**

- Designed for materials with hardness < 200 BHN (700 N/mm<sup>2</sup>)
- Improves chip formation in materials with very high elasticity/ductility, extremely poor chip forming characteristics, and low material hardness
- SK corner clip improves tool life
- Target materials: soft steels, steel castings and forgings (not suitable for stainless steel)




**High Rake Notch Point® (-RN)**

- Combination of high rake and Notch Point geometries
- Reduces bellmouth and lead-off
- Improves chip formation in materials with very high elasticity/ductility, extremely poor chip forming characteristics, and low material hardness




**Cast Iron (-CI)**

- Specifically designed for use in grey and white cast irons
- Exceptional edge strength
- SK2 corner preparation for improved tool life
- Standard geometry on K10 (C3) carbide inserts




**Cast Iron Notch Point® (-CN)**

- Combination of cast iron and Notch Point geometries
- Increases stability in deep hole applications
- Specifically designed for use in grey and white cast irons




**Aluminium (-AN)**

- First choice for machining aluminium
- Enhanced geometry improves chip formation and hole quality
- TiN coating improves heat resistance and extends tool life




**Brass (-BR)**

- Improves tool life due to the specialised geometry and edge preparation
- Reduces self-feed tendency




**90° Spot and Chamfer (-SP)**

- Center cutting web design improves stability and strength
- Eliminates the need for a secondary chamfering operation
- Available with chipbreakers (see -SW below)




**Flat Bottom (-FB)**

- Ideal for flattening or squaring the bottom of preexisting holes with high rigidity
- Includes small 10° point on the nose of the insert
- Available without chipbreakers (see -FN below)




**90° Spot and Chamfer (-SW)**

- Center cutting web design improves stability and strength
- Eliminates the need for a secondary chamfering operation
- With added chipbreakers



**Flat Bottom (-FN)**

- Ideal for flattening or squaring the bottom of preexisting holes with high rigidity
- Includes small 10° point on the nose of the insert
- Available with chipbreakers (see -FB above)





### Available Standard Insert Geometries

The following table shows which geometries are available as a standard item (based on insert type and series). If you need a geometry on your insert but it is not listed as available, please call the Application Engineering department to discuss quoting your insert as a special to include the desired geometry.

Additional lead time and process fees may apply.

Available Additional Geometries		GEN2 T-A®			T-A							
		Y - 2 Series	3 - 4 Series	5 - 8 Series	HSS Inserts				Carbide Inserts			
					Y - 2 Series	3 Series	4 Series	5 - 8 Series	Y - Z Series	0 - 2 Series	3 Series	
-AN	Aluminium				●					●	●	
-BT	BT-A Specific										●	●
-BR	Brass		●	●	●	●	●	●		●	●	●
-CI	Cast Iron		●		●	●	●			●	●	●
-CN	Cast Iron Notch Point®				●					●	●	●
-CP	Cam Point				●					●	●	
-CR	Corner Radius		●	●	●	●	●	●		●	●	●
-FB	Flat Bottom				●	●	●					
-FN	Flat Bottom				●	●	●					
-HE	High Efficiency	●	●									
-HI	High Impact		●	●	●	●	●	●		●	●	●
-HR	High Rake		●	●	●	●	●	●		●	●	●
-IN	High Impact Notch Point®				●					●	●	●
-NC	No Chipbreaker		●	●	●	●	●	●		●	●	●
-NP	Notch Point®				●					●	●	●
-RN	High Rake Notch Point®				●					●	●	●
-SK	Special Corner Preparation		●	●	●	●	●	●		●	●	●
-SP	90° Spot and Chamfer				●	●						
-SW	90° Spot and Chamfer				●	●						
-SS	150° Structural Steel				●	●						
-TC	Tiny Chip				●	●	●	●		●	●	
-TW	Thin Wall				●	●						
-WC	No Corner Clips		●	●	●	●	●	●		●	●	●

## Drill Holders

### Holder Length Options (for use with both GEN2 T-A and T-A inserts)



**Stub Length** | Series: Y - 3 (straight flute flanged shank only)



**Short Length** | Series: ALL



**Intermediate Length** | Series: ALL



**Standard Length** | Series: ALL



**Standard Plus Length** | Series: Y - 2 (helical flute flanged shank only)



**Extended Length** | Series: 0 - 3



**Long Length** | Series: 0 - 2



**Long Plus Length** | Series: 0



**XL Length** | Series: ALL



**3XL Length** | Series: ALL

### Holder Shank Options



**ER Collet Shank**  
Series: Y, Z, 0



**Straight Shank**  
Series: ALL







**Morse Taper Shank**  
Series: ALL



**Flanged Shank**  
Series: ALL

**Half Series Holders (0.5, 1.5, 2.5)**

Half series holders are recommended when running carbide inserts toward the upper end of the series drill range, as well as in tougher applications requiring more insert support and holder strength. **NOTE:** Only specified half series inserts should be used with half series holders.


			
Standard Series Insert + Standard Series Holder	Half Series Insert + Standard Series Holder	Half Series Insert + Half Series Holder	Standard Series Insert + Half Series Holder


**1. WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.


## Technical Information

### Next Level Solutions: GEN2 T-A®

What takes a solution to the next level? When you make innovative designs and enhancements to a product that already achieves high performance results, you push the boundaries of what is known to the next level.

	<p style="text-align: center;"><b>AM300® Coating</b></p> <ul style="list-style-type: none"> <li>• <b>Provides superior tool life</b> at high penetration rates</li> <li>• <b>Improves heat resistance</b> over AM200® coating</li> <li>• <b>Increases tool life</b> up to 20% over AM200 coating</li> </ul>
---	---

	<p style="text-align: center;"><b>AM200® Coating</b></p> <ul style="list-style-type: none"> <li>• <b>Improves heat resistance</b> over TiN, TiCN, and TiAlN with improved wear capabilities</li> <li>• <b>Increases penetration rates</b></li> <li>• <b>Increases tool life</b> more than 20% over TiAlN coating</li> </ul>
---	---

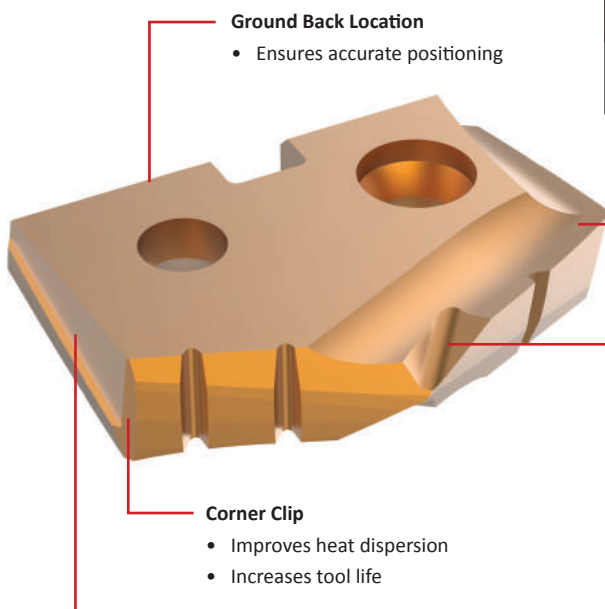

**Ground Back Location**

- Ensures accurate positioning

**Curved Cutting Edge** (not all series)

- Enhances chip formation

**Notch Point® Geometry**


- Improves stability and hole straightness
- Reduces thrust

**Corner Clip**

- Improves heat dispersion
- Increases tool life

**Helical Margin** (not all series)

- Increases drill stability

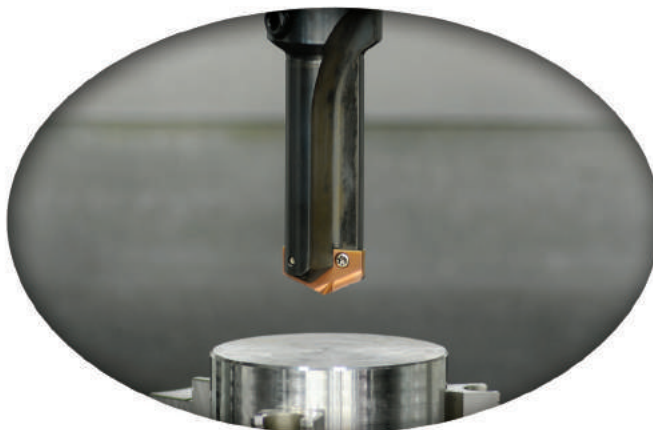


### Improving Chip Formation

Achieving optimal chip formation is crucial. The quality of the chips being produced directly affects everything in the entire process: the cycle time, the tool life, the scrap rate, and the quality and condition of the final machined hole.

We know how important chip formation is. That's why we constantly improve and develop new geometries to create a better, more productive T-A product.

### Setting Up New Applications



- Check coolant flows adequately through the tool before beginning
- Drill a short hole 1xD deep initially
- The chips produced should be short in length and material colored, not straw or blue
- Measure the hole produced to check that it is within the desired tolerance
- If all is correct, continue to machine the remainder of the hole
- Ensure the drilling process is quiet and smooth with no chip packing

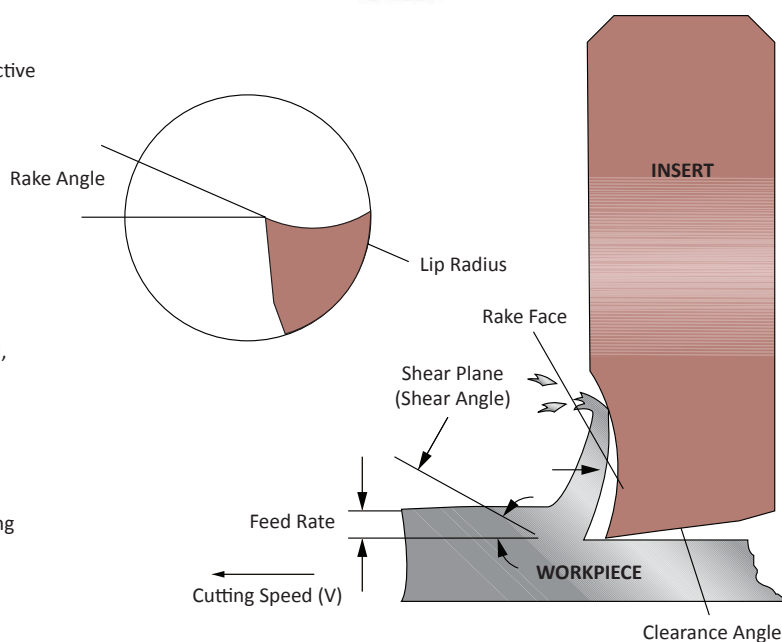

**Wear vs Toughness**

When selecting a grade of cutting tool material for your application, both wear resistance and grade toughness should be considered. The greater the wear resistance a cutting tool material exhibits, the more likely chipping or fracture is to occur. This requires more rigid machining conditions.

On the other hand, to effectively machine some materials, cobalt or carbide grades of cutting tool material may be required. The graph will aid you in the selection of a cutting tool material with the right combination of wear resistance and toughness to make your application both efficient and cost-effective.

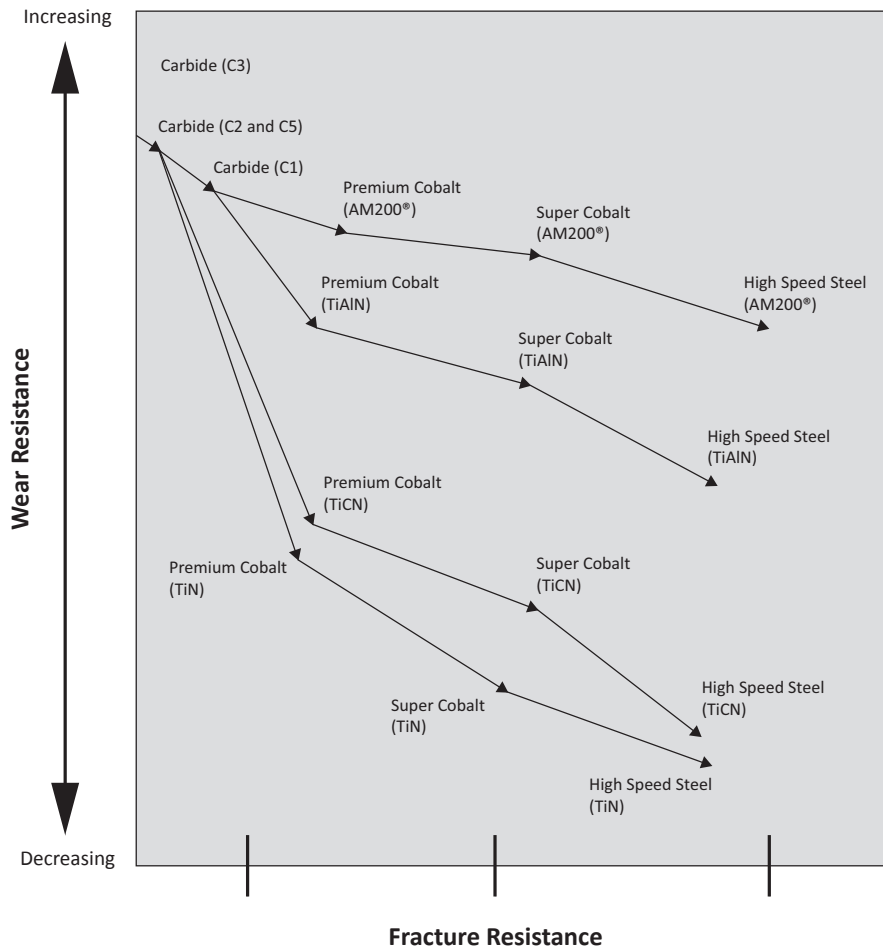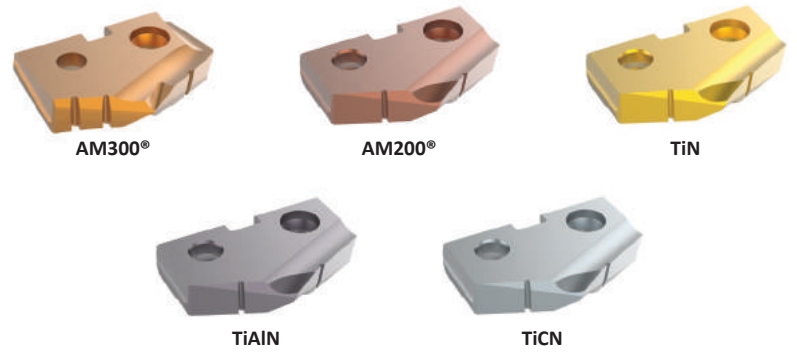

**T-A System Guidelines for Use**

- Select the shortest holder possible for the application
- Ensure the T-A® holder is held securely and is within 0.08 mm (0.003") of centre line
- The T-A insert should be installed in the slot of the holder using the TORX Plus screws provided. These should be tightened to the values listed on the T-A holder pages
- The holder slot should be clean from dirt or debris
- Check that the insert outer diameter is a minimum of 0.30 mm (0.012") larger than the holder body diameter
- Use the recommended cutting data section for guidance when selecting correct insert grades, along with speeds and feeds
- **NOTE:** These cutting parameters are starting conditions only and make no allowance for machine or component rigidity








## Product Nomenclature

### T-A Drill Holders

<b>2</b>	<b>30</b>	<b>20</b>	<b>S</b>	-	<b>32</b>	<b>FM</b>
1	2	3	4		5	6




<b>1. Holder</b> 2 = T-A holder	<b>2. Length</b> 10 = Stub 20 = Short 30 = Intermediate 40 = Standard 45 = Standard Plus 50 = Extended 60 = Long 65 = Long Plus 70 = XL 90 = 3XL	<b>3. Series</b> Y0 = Y series      20 = 2 series Z0 = Z series      25 = 2.5 series 00 = 0 series      30 = 3 series 05 = 0.5 series    40 = 4 series 10 = 1 series      50 = 5 series 15 = 1.5 series    70 = 7 series	<b>4. Flute</b> S = Straight H = Helical
------------------------------------	--	--	--

<b>5. Shank Designator</b>			<b>6. Shank Code</b>	
<b>Morse Taper</b> 002 = 2MT 003 = 3MT 004 = 4MT 005 = 5MT	<b>Metric</b> 16 = 16 mm 20 = 20 mm 25 = 25 mm 32 = 32 mm 40 = 40 mm 50 = 50 mm	<b>Imperial</b> 063 = 5/8" 075 = 3/4" 100 = 1" 125 = 1-1/4" 150 = 1-1/2" 175 = 1-3/4" 200 = 2" 300 = 3"	<b>M</b> = Metric Morse taper <b>I</b> = Imperial Morse taper <b>L</b> = Lathe shank <b>FM</b> = Flanged metric shank <b>F</b> = Flanged shank	



### Reference Key

Symbol	Attribute
$D_2$	Shank diameter
$L_1$	Overall length
$L_2$	Drill depth
$L_3$	Holder reference length
$L_4$	Holder length
$L_7$	Shank length
$P_1$	Rear pipe tap
$P_2$	Side pipe tap
<b>RCA</b>	Corresponding RCA item number
<b>MT</b>	Morse taper size
<b>ER</b>	ER collet size

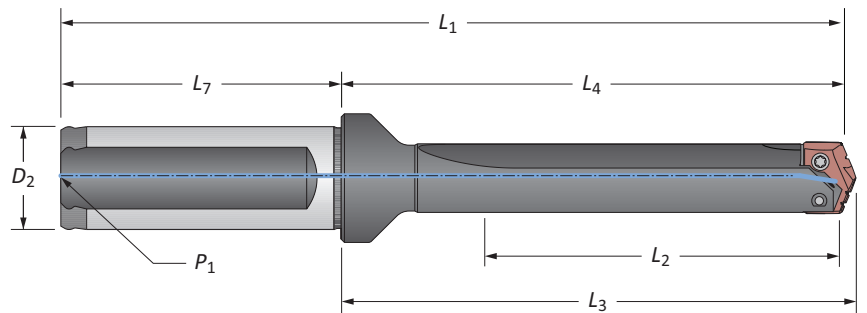





## GEN2 T-A Drill Inserts

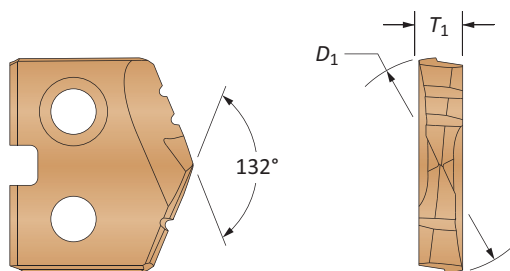Y Series | Diameter Range: 9.50 mm - 11.07 mm (0.374" - 0.436")



HSS Inserts – Super Cobalt • Carbide Inserts – K20 (C2) | K35 (C1)

Insert				HSS Part No.	Carbide Part No.	
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200® Super Cobalt	 AM300® K20 (C2)	 AM300® K35 (C1)
9.50	0.3740	–	2.38	45YH-9.5	4C2YP-9.5	4C1YP-9.5
9.53	0.3750	3/8	2.38	45YH-0012	4C2YP-0012	4C1YP-0012
9.80	0.3860	W	2.38	45YH-.386	4C2YP-.386	4C1YP-.386
9.92	0.3906	25/64	2.38	45YH-.390	4C2YP-.390	4C1YP-.390
10.00	0.3937	–	2.38	45YH-10	4C2YP-10	4C1YP-10
10.20	0.4016	–	2.38	45YH-10.2	4C2YP-10.2	4C1YP-10.2
10.32	0.4063	13/32	2.38	45YH-0013	4C2YP-0013	4C1YP-0013
10.50	0.4134	–	2.38	45YH-10.5	4C2YP-10.5	4C1YP-10.5
10.72	0.4219	27/64	2.38	45YH-.421	4C2YP-.421	4C1YP-.421
10.80	0.4252	–	2.38	45YH-10.8	4C2YP-10.8	4C1YP-10.8
11.00	0.4331	–	2.38	45YH-11	4C2YP-11	4C1YP-11





Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TIN = 1C2YT-XXXX	TIAIN = 1C2YA-XXXX
TICN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX




Inserts sold in quantities of 2




## T-A Drill Inserts

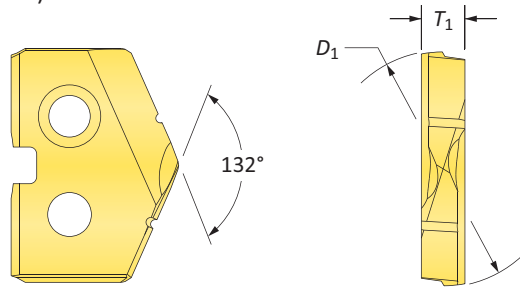
Y Series | HSS | Diameter Range: 9.50 mm - 11.07 mm (0.374" - 0.436")



### HSS Inserts – Premium Cobalt

Insert				Part No.		
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN
9.50	0.3740	–	2.38	<b>18YT-9.5</b>	<b>18YA-9.5</b>	<b>18YN-9.5</b>
9.53	0.3750	3/8	2.38	<b>18YT-0012</b>	<b>18YA-0012</b>	<b>18YN-0012</b>
9.80	0.3860	W	2.38	<b>18YT-.386</b>	<b>18YA-.386</b>	<b>18YN-.386</b>
9.92	0.3906	25/64	2.38	<b>18YT-.390</b>	<b>18YA-.390</b>	<b>18YN-.390</b>
10.00	0.3937	–	2.38	<b>18YT-10</b>	<b>18YA-10</b>	<b>18YN-10</b>
10.20	0.4016	–	2.38	<b>18YT-10.2</b>	<b>18YA-10.2</b>	<b>18YN-10.2</b>
10.32	0.4063	13/32	2.38	<b>18YT-0013</b>	<b>18YA-0013</b>	<b>18YN-0013</b>
10.50	0.4134	–	2.38	<b>18YT-10.5</b>	<b>18YA-10.5</b>	<b>18YN-10.5</b>
10.72	0.4219	27/64	2.38	<b>18YT-.421</b>	<b>18YA-.421</b>	<b>18YN-.421</b>
10.80	0.4252	–	2.38	<b>18YT-10.8</b>	<b>18YA-10.8</b>	<b>18YN-10.8</b>
11.00	0.4331	–	2.38	<b>18YT-11</b>	<b>18YA-11</b>	<b>18YN-11</b>



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 




Inserts sold in quantities of 2

<b>TiN</b> = 1C2YT-XXXX	<b>TiAlN</b> = 1C2YA-XXXX
<b>TiCN</b> = 1C2YN-XXXX	<b>AM200®</b> = 1C2YH-XXXX




Y  
A DRILLING  
B BORING  
C REAMING  
D BURNISHING  
E THREADING  
X SPECIALS

## T-A Drill Inserts

Y Series | HSS | Diameter Range: 9.50 mm - 11.07 mm (0.374" - 0.436")



### HSS Inserts – Super Cobalt



Insert				Part No.		
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN
9.50	0.3740	–	2.38	15YT-9.5	15YA-9.5	15YN-9.5
9.53	0.3750	3/8	2.38	15YT-0012	15YA-0012	15YN-0012
9.80	0.3860	W	2.38	15YT-.386	15YA-.386	15YN-.386
9.92	0.3906	25/64	2.38	15YT-.390	15YA-.390	15YN-.390
10.00	0.3937	–	2.38	15YT-10	15YA-10	15YN-10
10.20	0.4016	–	2.38	15YT-10.2	15YA-10.2	15YN-10.2
10.32	0.4063	12.38	2.38	15YT-0013	15YA-0013	15YN-0013
10.50	0.4134	–	2.38	15YT-10.5	15YA-10.5	15YN-10.5
10.72	0.4219	27/64	2.38	15YT-.421	15YA-.421	15YN-.421
10.80	0.4252	–	2.38	15YT-10.8	15YA-10.8	15YN-10.8
11.00	0.4331	–	2.38	15YT-11	15YA-11	15YN-11

Inserts sold in quantities of 2

A30: 112 - 143

A30: 18 - 21

A30: 4 - 6




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →



TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

### T-A Drill Inserts


Y Series | HSS | Diameter Range: 9.50 mm - 11.07 mm (0.374" - 0.436")





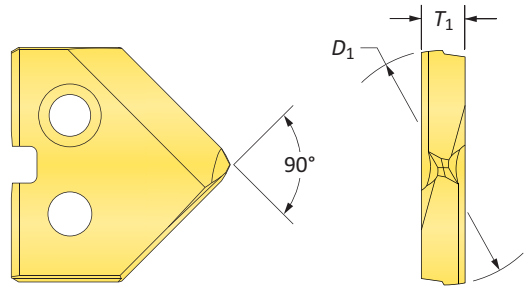

90° Spot & Chamfer

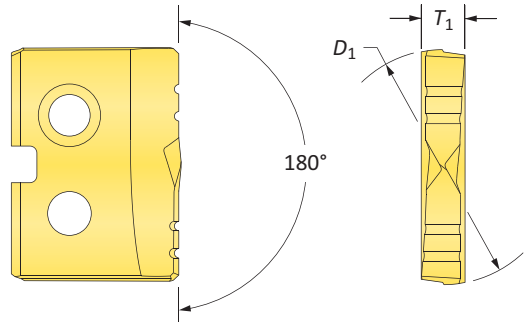



Flat Bottom



#### HSS Inserts – Super Cobalt

Insert				90° Spot & Chamfer Part No.			Flat Bottom Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN	 TiN
9.50	0.3740	–	2.38	15YT-9.5-SP	15YA-9.5-SP	15YN-9.5-SP	15YT-9.5-FB
9.53	0.3750	3/8	2.38	15YT-0012-SP	15YA-0012-SP	15YN-0012-SP	15YT-0012-FB
9.80	0.3860	W	2.38	15YT-.386-SP	15YA-.386-SP	15YN-.386-SP	15YT-.386-FB
9.92	0.3906	25/64	2.38	15YT-.390-SP	15YA-.390-SP	15YN-.390-SP	15YT-.390-FB
10.00	0.3937	–	2.38	15YT-10-SP	15YA-10-SP	15YN-10-SP	15YT-10-FB
10.20	0.4016	–	2.38	15YT-10.2-SP	15YA-10.2-SP	15YN-10.2-SP	15YT-10.2-FB
10.32	0.4063	12.38	2.38	15YT-0013-SP	15YA-0013-SP	15YN-0013-SP	15YT-0013-FB
10.50	0.4134	–	2.38	15YT-10.5-SP	15YA-10.5-SP	15YN-10.5-SP	15YT-10.5-FB
10.72	0.4219	27/64	2.38	15YT-.421-SP	15YA-.421-SP	15YN-.421-SP	15YT-.421-FB
10.80	0.4252	–	2.38	15YT-10.8-SP	15YA-10.8-SP	15YN-10.8-SP	15YT-10.8-FB
11.00	0.4331	–	2.38	15YT-11-SP	15YA-11-SP	15YN-11-SP	15YT-11-FB

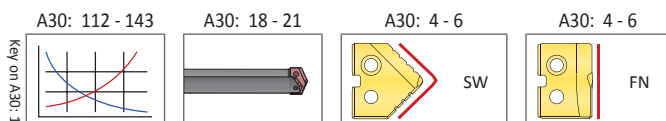

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 


Inserts sold in quantities of 2

TiN = 1C2YI-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX






## T-A Drill Inserts



Y Series | Carbide | Diameter Range: 9.50 mm - 11.07 mm (0.374" - 0.436")






Standard







Flat Bottom



### Carbide Inserts – K20 (C2)

Insert				Part No.		Flat Bottom Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiN
9.50	0.3740	–	2.38	1C2YT-9.5	1C2YA-9.5	1C2YT-9.5-FB
9.53	0.3750	3/8	2.38	1C2YT-0012	1C2YA-0012	1C2YT-0012-FB
9.80	0.3860	W	2.38	1C2YT-.386	1C2YA-.386	1C2YT-.386-FB
9.92	0.3906	25/64	2.38	1C2YT-.390	1C2YA-.390	1C2YT-.390-FB
10.00	0.3937	–	2.38	1C2YT-10	1C2YA-10	1C2YT-10-FB
10.20	0.4016	–	2.38	1C2YT-10.2	1C2YA-10.2	1C2YT-10.2-FB
10.32	0.4063	12.38	2.38	1C2YT-0013	1C2YA-0013	1C2YT-0013-FB
10.50	0.4134	–	2.38	1C2YT-10.5	1C2YA-10.5	1C2YT-10.5-FB
10.72	0.4219	27/64	2.38	1C2YT-.421	1C2YA-.421	1C2YT-.421-FB
10.80	0.4252	–	2.38	1C2YT-10.8	1C2YA-10.8	1C2YT-10.8-FB
11.00	0.4331	–	2.38	1C2YT-11	1C2YA-11	1C2YT-11-FB





Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX





Inserts sold in quantities of 2

### T-A Drill Inserts


Y Series | Carbide | Diameter Range: 9.50 mm - 11.07 mm (0.374" - 0.436")

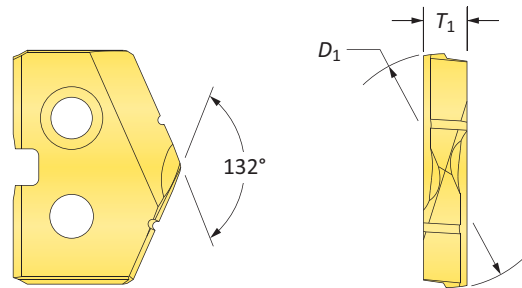



Carbide Inserts – P40 (C5) | K10 (C3) | N2


Insert				C5 Part No.		C3 Part No.	N2 Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiAlN (Cast Iron)	 Diamond Film*
9.50	0.3740	–	2.38	<b>1C5YT-9.5</b>	<b>1C5YA-9.5</b>	<b>1C3YA-9.5-CI</b>	<b>1N2YD-9.5</b>
9.53	0.3750	3/8	2.38	<b>1C5YT-0012</b>	<b>1C5YA-0012</b>	<b>1C3YA-0012-CI</b>	<b>1N2YD-0012</b>
9.80	0.3860	W	2.38	<b>1C5YT-.386</b>	<b>1C5YA-.386</b>	<b>1C3YA-.386-CI</b>	<b>1N2YD-.386</b>
9.92	0.3906	25/64	2.38	<b>1C5YT-.390</b>	<b>1C5YA-.390</b>	<b>1C3YA-.390-CI</b>	<b>1N2YD-.390</b>
10.00	0.3937	–	2.38	<b>1C5YT-10</b>	<b>1C5YA-10</b>	<b>1C3YA-10-CI</b>	<b>1N2YD-10</b>
10.20	0.4016	–	2.38	<b>1C5YT-10.2</b>	<b>1C5YA-10.2</b>	<b>1C3YA-10.2-CI</b>	<b>1N2YD-10.2</b>
10.32	0.4063	12.38	2.38	<b>1C5YT-0013</b>	<b>1C5YA-0013</b>	<b>1C3YA-0013-CI</b>	<b>1N2YD-0013</b>
10.50	0.4134	–	2.38	<b>1C5YT-10.5</b>	<b>1C5YA-10.5</b>	<b>1C3YA-10.5-CI</b>	<b>1N2YD-10.5</b>
10.72	0.4219	27/64	2.38	<b>1C5YT-.421</b>	<b>1C5YA-.421</b>	<b>1C3YA-.421-CI</b>	<b>1N2YD-.421</b>
10.80	0.4252	–	2.38	<b>1C5YT-10.8</b>	<b>1C5YA-10.8</b>	<b>1C3YA-10.8-CI</b>	<b>1N2YD-10.8</b>
11.00	0.4331	–	2.38	<b>1C5YT-11</b>	<b>1C5YA-11</b>	<b>1C3YA-11-CI</b>	<b>1N2YD-11</b>

\*Diamond Film is only available in standard geometry. For additional geometries, please contact Application Engineering.

A30: 112 - 143  
  
 Key on A30: 1

A30: 18 - 21  


A30: 4 - 6  
 HI, HR, CR, TC, SK, NP, IN, RN, CN, AN, BR, CI, CP, NC, WC, BT

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 


Inserts sold in quantities of 2

<b>TiN</b> = 1C2YT-XXXX	<b>TiAlN</b> = 1C2YA-XXXX
<b>TiCN</b> = 1C2YN-XXXX	<b>AM200®</b> = 1C2YH-XXXX

Y  
A DRILLING  
B BORING  
C REAMING  
D BURNISHING  
E THREADING  
X SPECIALS

## T-A Drill Insert Holders


Y Series | Flange Shank | Diameter Range: 9.50 mm - 11.07 mm (0.374" - 0.436")

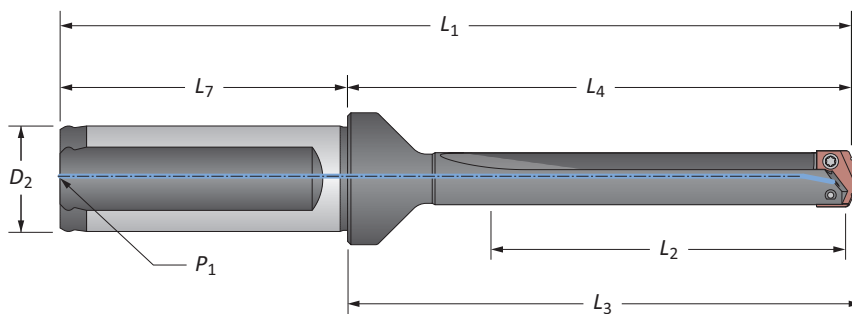

### Straight Flute

	Length	Body				Shank			Part No.
		$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
m	Short	31.8	61.1	63.5	111.1	20.0	50.0	1/8*	220Y0S-20FM
	XL	222	251.7	254.1	301.7	20.0	50.0	1/8*	270Y0S-20FM
	3XL	290	319.9	322.3	369.9	20.0	50.0	1/8*	290Y0S-20FM
i	Short	1-1/4	2-13/32	2-1/2	4-7/16	3/4	2-1/32	1/8	220Y0S-075F
	Standard	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8	240Y0S-075F
	Extended	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8	250Y0S-075F

\*Metric thread to BSP and ISO 7-1

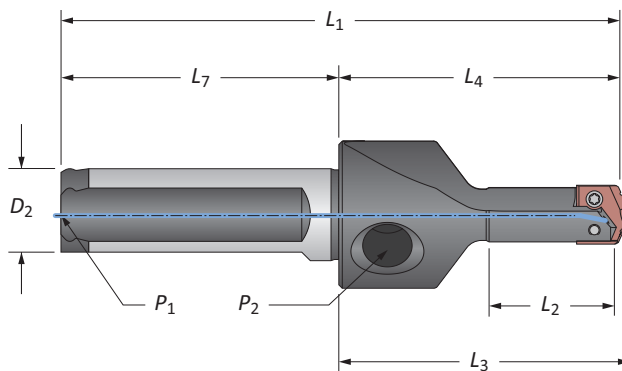

### Straight Flute (Stub Length)

	Length	Body				Shank			Part No.
		$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
m	Stub	19.1	47.6	50.0	95.6	16.0	48.0	1/16*	210Y0S-16FM
i	Stub	3/4	1-7/8	1-31/32	3-3/4	5/8	1-7/8	1/16	210Y0S-063F


\*Metric thread to BSP and ISO 7-1

**NOTE:** Stub length holders have a 1/8" side pipe tap ( $P_2$ )

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
724-IP7-1	724N-IP7-1	8IP-7	8IP-7TL	8IP-7B	84 N-cm (7.4 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



m = Metric (mm)


i = Imperial (in)

Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

Y Series | Flange Shank | Diameter Range: 9.50 mm - 11.07 mm (0.374" - 0.436")

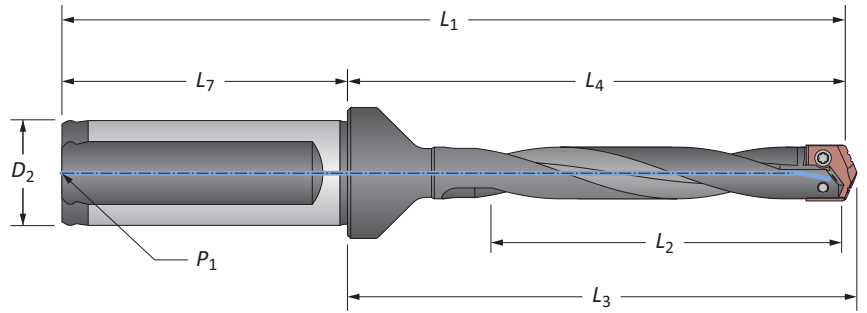

### Helical Flute

Length	Body				Shank			Part No.
	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
<b>M</b> Standard	60.3	89.7	92.1	139.7	20.0	50.0	1/8*	<b>240Y0H-20FM</b>
<b>M</b> Standard Plus	86.0	115.4	117.8	165.4	20.0	50.0	1/8*	<b>245Y0H-20FM</b>
<b>M</b> Extended	111.1	140.5	142.9	190.5	20.0	50.0	1/8*	<b>250Y0H-20FM</b>
<b>I</b> Standard	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8	<b>240Y0H-075F</b>
<b>I</b> Standard Plus	3-3/8	4-35/64	4-41/64	6-43/64	3/4	2-1/32	1/8	<b>245Y0H-075F</b>
<b>I</b> Extended	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8	<b>250Y0H-075F</b>


\*Metric thread to BSP and ISO 7-1

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
724-IP7-1	724N-IP7-1	8IP-7	8IP-7TL	8IP-7B	84 N-cm (7.4 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 12 - 17



**M** = Metric (mm)


**I** = Imperial (in)

Screws sold in quantities of 10

**1. WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

Y Series | Taper Shank | Diameter Range: 9.50 mm - 11.07 mm (0.374" - 0.436")

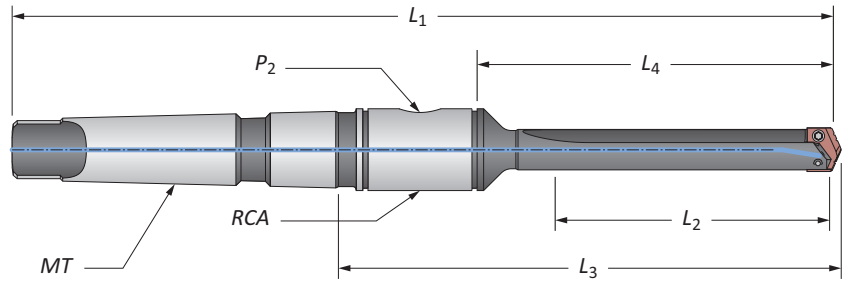


### Straight Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA	
<b>m</b>	Short	31.8	51.5	88.0	160.3	#2**	1/16*	2T-2SRM	220Y0S-002M
<b>i</b>	Short	1-1/4	2-1/32	3-15/32	6-5/16	#2	1/16	2T-2SR	220Y0S-002I
	Standard	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	2T-2SR	240Y0S-002I
	Extended	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	2T-2SR	250Y0S-002I

\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

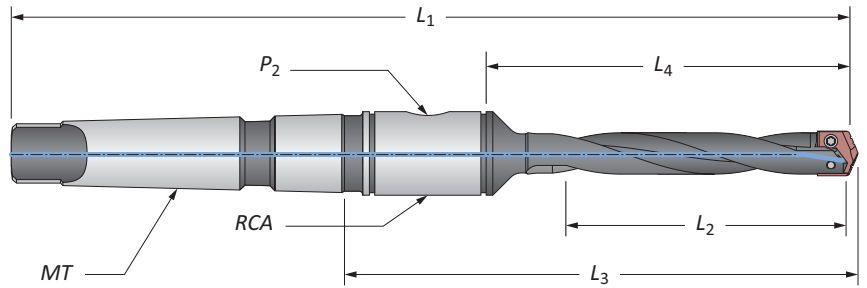

### Helical Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA	
<b>m</b>	Standard	60.3	80.2	116.7	188.9	#2**	1/16*	2T-2SRM	240Y0H-002M
	Extended	111.1	130.9	167.4	239.7	#2**	1/16*	2T-2SRM	250Y0H-002M
<b>i</b>	Standard	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	2T-2SR	240Y0H-002I
	Extended	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	2T-2SR	250Y0H-002I


\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
724-IP7-1	724N-IP7-1	8IP-7	8IP-7TL	8IP-7B	84 N-cm (7.4 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



**m** = Metric (mm)

**i** = Imperial (in)


Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.




## T-A Drill Insert Holders

Y Series | Straight Shank | ER Collet | Diameter Range: 9.50 mm - 11.07 mm (0.374" - 0.436")

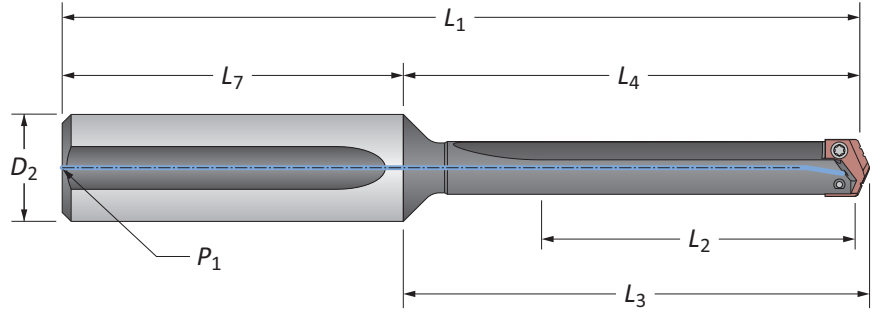

### Straight Flute

Length	Body				Shank			Part No.
	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
Short	1-1/4	2-1/32	2-1/8	4-13/32	3/4	2-3/8	1/8	220Y0S-075L
Standard	2-3/8	3-5/32	3-1/4	5-17/32	3/4	2-3/8	1/8	240Y0S-075L
Extended	4-3/8	5-5/32	5-1/4	7-17/32	3/4	2-3/8	1/8	250Y0S-075L
XL	8-3/4	9-17/32	9-5/8	11-29/32	3/4	2-3/8	1/8	270Y0S-075L
3XL	11-7/16	12-7/32	12-5/16	14-19/32	3/4	2-3/8	1/8	290Y0S-075L

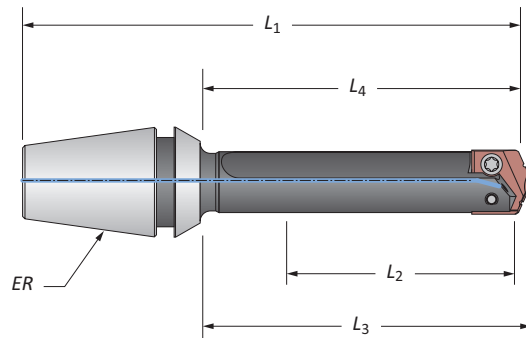

### ER Collet Holder


Length	Body				ER	Part No.	Collet Nut without Retaining Ring
	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>			
1-3/8	1-29/32	2	3-5/64	ER-16	210Y0S-16ER	ER-16N	
1-3/8	1-29/32	2	3-15/64	ER-20	210Y0S-20ER	ER-20N	

## T-A Drill Accessories

Y Series | Rotary Coolant Adapters | Torx® Plus Screws

### Rotary Coolant Adapter (RCA) and Accessories

ID	OD	L <sub>1</sub>	Driving Rod Thread	P <sub>1</sub>	RCA O-Rings		
					Part No.	Kit Part No.**	Replacements
19.05	44.45	22.23	M8 x 1.25	1/8*	2T-2SRM	2T1-2SR	2T1-2OR-10
3/4	1-3/4	7/8	5/16-18	1/8	2T-2SR	2T1-2SR	2T1-2OR-10

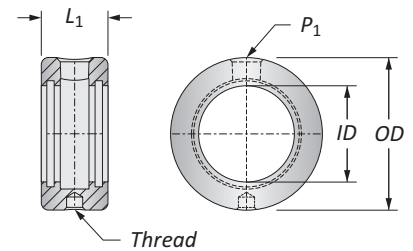



\*Thread to BSP and ISO 7-1 | \*\*RCA Repair Kit includes (2) O-rings, (2) snap rings, and (2) thrust washers  
 ⚠ Refer to page A30: 110 for proper RCA assembly and safety information

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
724-IP7-1	724N-IP7-1	8IP-7	8IP-7TL	8IP-7B	84 N-cm (7.4 in-lbs)



\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

**⚠ WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.




 = Metric (mm)  
 = Imperial (in)  
 Screws sold in packs of 10  
 O-rings sold in packs of 10


## GEN2 T-A Drill Inserts

Z Series | Diameter Range: 11.10 mm - 12.95 mm (0.437" - 0.510")

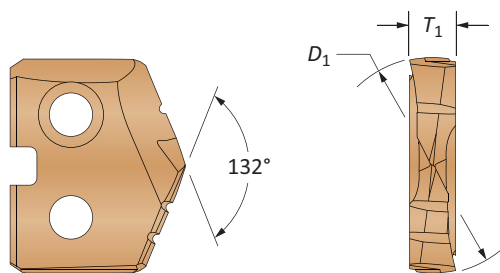

HSS Inserts – Super Cobalt • Carbide Inserts – K20 (C2) | K35 (C1)

Insert				HSS Part No.	Carbide Part No.	
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200® Super Cobalt	 AM300® K20 (C2)	 AM300® K35 (C1)
11.11	0.4375	7/16	2.38	45ZH-0014	4C2ZP-0014	4C1ZP-0014
11.46	0.4510	–	2.38	45ZH-.451	4C2ZP-.451	4C1ZP-.451
11.50	0.4528	–	2.38	45ZH-11.5	4C2ZP-11.5	4C1ZP-11.5
11.51	0.4531	29/64	2.38	45ZH-.453	4C2ZP-.453	4C1ZP-.453
11.91	0.4688	15/32	2.38	45ZH-0015	4C2ZP-0015	4C1ZP-0015
12.00	0.4724	–	2.38	45ZH-12	4C2ZP-12	4C1ZP-12
12.30	0.4844	31/64	2.38	45ZH-.484	4C2ZP-.484	4C1ZP-.484
12.50	0.4921	–	2.38	45ZH-12.5	4C2ZP-12.5	4C1ZP-12.5
12.70	0.5000	1/2	2.38	45ZH-0016	4C2ZP-0016	4C1ZP-0016
12.85	0.5060	–	2.38	45ZH-.506	4C2ZP-.506	4C1ZP-.506
12.95	0.5100	–	2.38	45ZH-.510	4C2ZP-.510	4C1ZP-.510

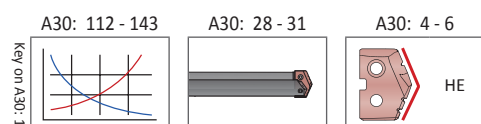

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →



TIN = 1C2YT-XXXX	TIAIN = 1C2YA-XXXX
TICN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

Inserts sold in quantities of 2






### T-A Drill Inserts

Z Series | HSS | Diameter Range: 11.10 mm - 12.95 mm (0.437" - 0.510")

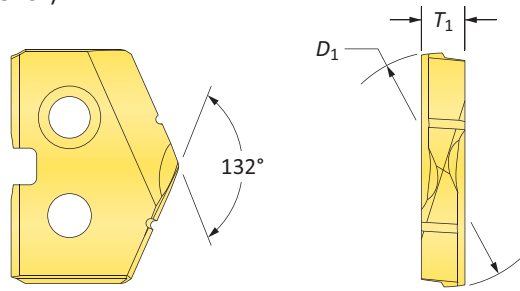

#### HSS Inserts – Premium Cobalt




Insert				Part No.		
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN
11.11	0.4375	7/16	2.38	18ZT-0014	18ZA-0014	18ZN-0014
11.46	0.4510	-	2.38	18ZT-.451	18ZA-.451	18ZN-.451
11.50	0.4528	-	2.38	18ZT-11.5	18ZA-11.5	18ZN-11.5
11.51	0.4531	29/64	2.38	18ZT-.453	18ZA-.453	18ZN-.453
11.91	0.4688	15/32	2.38	18ZT-0015	18ZA-0015	18ZN-0015
12.00	0.4724	-	2.38	18ZT-12	18ZA-12	18ZN-12
12.30	0.4844	31/64	2.38	18ZT-.484	18ZA-.484	18ZN-.484
12.50	0.4921	-	2.38	18ZT-12.5	18ZA-12.5	18ZN-12.5
12.70	0.5000	1/2	2.38	18ZT-0016	18ZA-0016	18ZN-0016
12.85	0.5060	-	2.38	18ZT-.506	18ZA-.506	18ZN-.506
12.95	0.5100	-	2.38	18ZT-.510	18ZA-.510	18ZN-.510

Inserts sold in quantities of 2

A30: 112 - 143

A30: 28 - 31

A30: 4 - 6



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX




Z

 DRILLING | T-A® Replaceable Insert Drilling System

## T-A Drill Inserts

Z Series | HSS | Diameter Range: 11.10 mm - 12.95 mm (0.437" - 0.510")

**HSS Inserts – Super Cobalt**

Insert				Part No.		
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN
11.11	0.4375	7/16	2.38	15ZT-0014	15ZA-0014	15ZN-0014
11.46	0.4510	–	2.38	15ZT-.451	15ZA-.451	15ZN-.451
11.50	0.4528	–	2.38	15ZT-11.5	15ZA-11.5	15ZN-11.5
11.51	0.4531	29/64	2.38	15ZT-.453	15ZA-.453	15ZN-.453
11.91	0.4688	15/32	2.38	15ZT-0015	15ZA-0015	15ZN-0015
12.00	0.4724	–	2.38	15ZT-12	15ZA-12	15ZN-12
12.30	0.4844	31/64	2.38	15ZT-.484	15ZA-.484	15ZN-.484
12.50	0.4921	–	2.38	15ZT-12.5	15ZA-12.5	15ZN-12.5
12.70	0.5000	1/2	2.38	15ZT-0016	15ZA-0016	15ZN-0016
12.85	0.5060	–	2.38	15ZT-.506	15ZA-.506	15ZN-.506
12.95	0.5100	–	2.38	15ZT-.510	15ZA-.510	15ZN-.510

D




BURNISHING

F


THREADING

X

SPECIALS

A30: 112 - 143  | 
 A30: 28 - 31  | 
 A30: 4 - 6 

HI, HR, CR, TC, SK,  
 NP, IN, RN, CN, AN,  
 BR, CI, CP, NC, WC

 Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 

Inserts sold in quantities of 2


TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

A30: 24



[www.alliedmachine.com](http://www.alliedmachine.com) | +44 (0) 1384 400 900 | [enquiries.eu@alliedmachine.com](mailto:enquiries.eu@alliedmachine.com)

### T-A Drill Inserts


Z Series | HSS | Diameter Range: 11.10 mm - 12.95 mm (0.437" - 0.510")





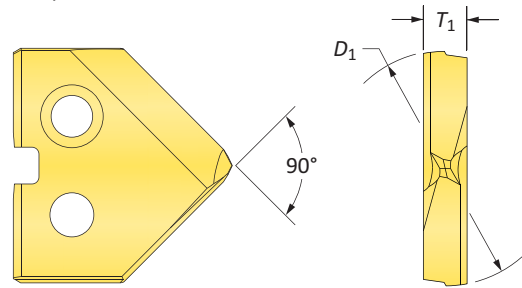

90° Spot & Chamfer




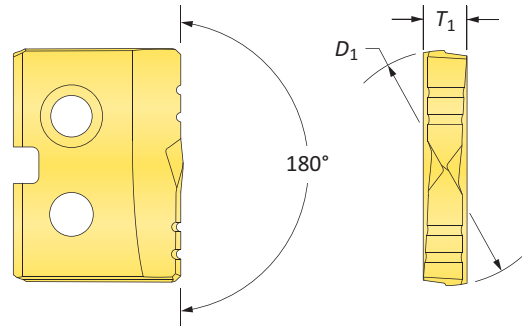



Flat Bottom



#### HSS Inserts – Super Cobalt

Insert				90° Spot & Chamfer Part No.			Flat Bottom Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN	 TiN
11.11	0.4375	7/16	2.38	15ZT-0014-SP	15ZA-0014-SP	15ZN-0014-SP	15ZT-0014-FB
11.46	0.4510	–	2.38	15ZT-.451-SP	15ZA-.451-SP	15ZN-.451-SP	15ZT-.451-FB
11.50	0.4528	–	2.38	15ZT-11.5-SP	15ZA-11.5-SP	15ZN-11.5-SP	15ZT-11.5-FB
11.51	0.4531	29/64	2.38	15ZT-.453-SP	15ZA-.453-SP	15ZN-.453-SP	15ZT-.453-FB
11.91	0.4688	15/32	2.38	15ZT-0015-SP	15ZA-0015-SP	15ZN-0015-SP	15ZT-0015-FB
12.00	0.4724	–	2.38	15ZT-12-SP	15ZA-12-SP	15ZN-12-SP	15ZT-12-FB
12.30	0.4844	31/64	2.38	15ZT-.484-SP	15ZA-.484-SP	15ZN-.484-SP	15ZT-.484-FB
12.50	0.4921	–	2.38	15ZT-12.5-SP	15ZA-12.5-SP	15ZN-12.5-SP	15ZT-12.5-FB
12.70	0.5000	1/2	2.38	15ZT-0016-SP	15ZA-0016-SP	15ZN-0016-SP	15ZT-0016-FB
12.85	0.5060	–	2.38	15ZT-.506-SP	15ZA-.506-SP	15ZN-.506-SP	15ZT-.506-FB
12.95	0.5100	–	2.38	15ZT-.510-SP	15ZA-.510-SP	15ZN-.510-SP	15ZT-.510-FB



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 

Inserts sold in quantities of 2




TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

## T-A Drill Inserts



Z Series | Carbide | Diameter Range: 11.10 mm - 12.95 mm (0.437" - 0.510")






Standard







Flat Bottom



### Carbide Inserts – K20 (C2)

Insert				Part No.		Flat Bottom Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiN
11.11	0.4375	7/16	2.38	1C2ZT-0014	1C2ZA-0014	1C2ZT-0014-FB
11.46	0.4510	–	2.38	1C2ZT-.451	1C2ZA-.451	1C2ZT-.451-FB
11.50	0.4528	–	2.38	1C2ZT-11.5	1C2ZA-11.5	1C2ZT-11.5-FB
11.51	0.4531	29/64	2.38	1C2ZT-.453	1C2ZA-.453	1C2ZT-.453-FB
11.91	0.4688	15/32	2.38	1C2ZT-0015	1C2ZA-0015	1C2ZT-0015-FB
12.00	0.4724	–	2.38	1C2ZT-12	1C2ZA-12	1C2ZT-12-FB
12.30	0.4844	31/64	2.38	1C2ZT-.484	1C2ZA-.484	1C2ZT-.484-FB
12.50	0.4921	–	2.38	1C2ZT-12.5	1C2ZA-12.5	1C2ZT-12.5-FB
12.70	0.5000	1/2	2.38	1C2ZT-0016	1C2ZA-0016	1C2ZT-0016-FB
12.85	0.5060	–	2.38	1C2ZT-.506	1C2ZA-.506	1C2ZT-.506-FB
12.95	0.5100	–	2.38	1C2ZT-.510	1C2ZA-.510	1C2ZT-.510-FB



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →



TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

Inserts sold in quantities of 2







### T-A Drill Inserts

Z Series | Carbide | Diameter Range: 11.10 mm - 12.95 mm (0.437" - 0.510")

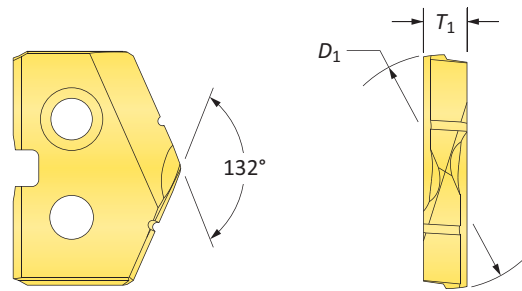

Carbide Inserts – P40 (C5) | K10 (C3) | N2

Insert				C5 Part No.		C3 Part No.	N2 Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiAlN (Cast Iron)	 Diamond Film*
11.11	0.4375	7/16	2.38	<b>1C5ZT-0014</b>	<b>1C5ZA-0014</b>	<b>1C3ZA-0014-CI</b>	<b>1N2ZD-0014</b>
11.46	0.4510	–	2.38	<b>1C5ZT-.451</b>	<b>1C5ZA-.451</b>	<b>1C3ZA-.451-CI</b>	<b>1N2ZD-.451</b>
11.50	0.4528	–	2.38	<b>1C5ZT-11.5</b>	<b>1C5ZA-11.5</b>	<b>1C3ZA-11.5-CI</b>	<b>1N2ZD-11.5</b>
11.51	0.4531	29/64	2.38	<b>1C5ZT-.453</b>	<b>1C5ZA-.453</b>	<b>1C3ZA-.453-CI</b>	<b>1N2ZD-.453</b>
11.91	0.4688	15/32	2.38	<b>1C5ZT-0015</b>	<b>1C5ZA-0015</b>	<b>1C3ZA-0015-CI</b>	<b>1N2ZD-0015</b>
12.00	0.4724	–	2.38	<b>1C5ZT-12</b>	<b>1C5ZA-12</b>	<b>1C3ZA-12-CI</b>	<b>1N2ZD-12</b>
12.30	0.4844	31/64	2.38	<b>1C5ZT-.484</b>	<b>1C5ZA-.484</b>	<b>1C3ZA-.484-CI</b>	<b>1N2ZD-.484</b>
12.50	0.4921	–	2.38	<b>1C5ZT-12.5</b>	<b>1C5ZA-12.5</b>	<b>1C3ZA-12.5-CI</b>	<b>1N2ZD-12.5</b>
12.70	0.5000	1/2	2.38	<b>1C5ZT-0016</b>	<b>1C5ZA-0016</b>	<b>1C3ZA-0016-CI</b>	<b>1N2ZD-0016</b>
12.85	0.5060	–	2.38	<b>1C5ZT-.506</b>	<b>1C5ZA-.506</b>	<b>1C3ZA-.506-CI</b>	<b>1N2ZD-.506</b>
12.95	0.5100	–	2.38	<b>1C5ZT-.510</b>	<b>1C5ZA-.510</b>	<b>1C3ZA-.510-CI</b>	<b>1N2ZD-.510</b>

\*Diamond Film is only available in standard geometry. For additional geometries, please contact Application Engineering.

A

DRILLING

B

BORING

C

REAMING

D




BURNISHING

F

THREADING

X

SPECIALS




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

Inserts sold in quantities of 2

<b>TiN</b> = 1C2YT-XXXX	<b>TiAlN</b> = 1C2YA-XXXX
<b>TiCN</b> = 1C2YN-XXXX	<b>AM200®</b> = 1C2YH-XXXX

## T-A Drill Insert Holders


Z Series | Flange Shank | Diameter Range: 11.10 mm - 12.95 mm (0.437" - 0.510")

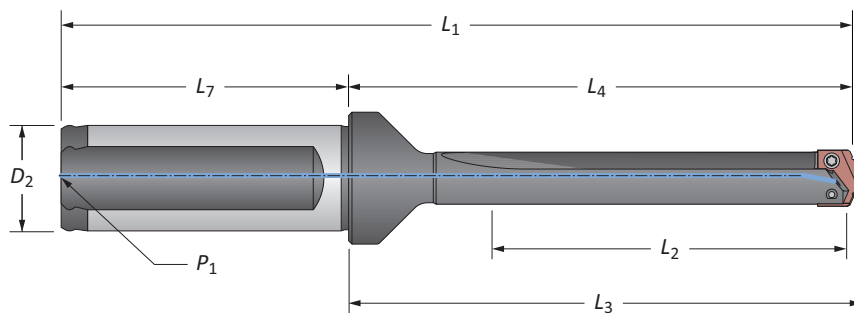

### Straight Flute

	Length	Body				Shank			Part No.
		$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
<b>m</b>	Short	31.8	61.1	63.5	111.1	20.0	50.0	1/8*	220Z0S-20FM
	XL	222.3	251.7	254.1	301.7	20.0	50.0	1/8*	270Z0S-20FM
	3XL	290.5	319.9	322.3	369.9	20.0	50.0	1/8*	290Z0S-20FM
<b>i</b>	Short	1-1/4	2-13/32	2-1/2	4-7/16	3/4	2-1/32	1/8	220Z0S-075F
	Standard	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8	240Z0S-075F
	Extended	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8	250Z0S-075F

\*Metric thread to BSP and ISO 7-1

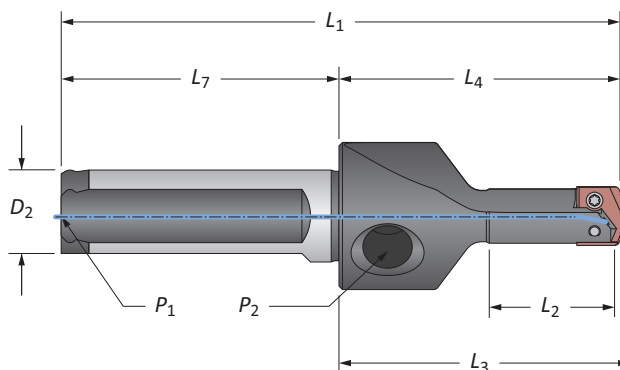

### Straight Flute (Stub Length)

	Length	Body				Shank			Part No.
		$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
<b>m</b>	Stub	19.1	47.6	50.0	95.6	16.0	48.0	1/16*	210Z0S-16FM
<b>i</b>	Stub	3/4	1-7/8	1-31/32	3-3/4	5/8	1-7/8	1/16	210Z0S-063F

\*Metric thread to BSP and ISO 7-1


**NOTE:** Stub length holders have a 1/8" side pipe tap ( $P_2$ )

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7247-IP7-1	7247N-IP7-1	8IP-7	8IP-7TL	8IP-7B	84 N-cm (7.4 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 22 - 27



**m** = Metric (mm)


**i** = Imperial (in)

Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

Z Series | Flange Shank | Diameter Range: 11.10 mm - 12.95 mm (0.437" - 0.510")

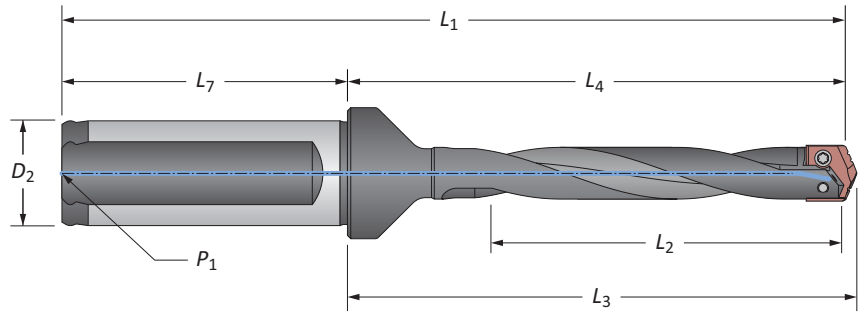






### Helical Flute

Length	Body				Shank			Part No.
	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
<b>m</b> Standard	60.3	89.7	92.1	139.7	20.0	50.0	1/8*	<b>240Z0H-20FM</b>
<b>m</b> Standard Plus	86.0	115.4	117.8	165.4	20.0	50.0	1/8*	<b>245Z0H-20FM</b>
<b>m</b> Extended	111.1	140.5	142.9	190.5	20.0	50.0	1/8*	<b>250Z0H-20FM</b>
<b>m</b> Long	180.0	209.4	211.8	259.4	20.0	50.0	1/8*	<b>260Z0H-20FM</b>
<b>i</b> Standard	2-3/8	3-17/32	3-5/8	5-9/16	3/4	2-1/32	1/8	<b>240Z0H-075F</b>
<b>i</b> Standard Plus	3-3/8	4-35/64	4-41/64	6-43/64	3/4	2-1/32	1/8	<b>245Z0H-075F</b>
<b>i</b> Extended	4-3/8	5-17/32	5-5/8	7-9/16	3/4	2-1/32	1/8	<b>250Z0H-075F</b>
<b>i</b> Long	7-1/16	8-1/4	8-11/32	10-3/8	3/4	2-1/32	1/8	<b>260Z0H-075F</b>


\*Metric thread to BSP and ISO 7-1

### Connection Accessories

 Insert Screws	 Nylon Locking Screws	 Insert Driver	 Preset Torque Hand Driver	 Replacement Tips	Admissible Tightening Torque* 84 N-cm (7.4 in-lbs)
7247-IP7-1	7247N-IP7-1	8IP-7	8IP-7TL	8IP-7B	

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 22 - 27



**m** = Metric (mm)


**i** = Imperial (in)

Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

Z Series | Taper Shank | Diameter Range: 11.10 mm - 12.95 mm (0.437" - 0.510")

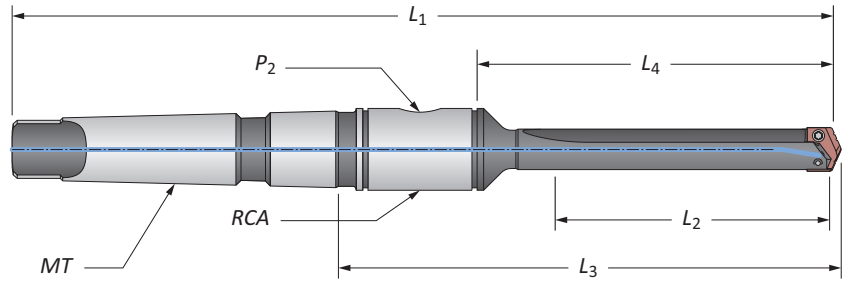


### Straight Flute

	Body				Shank			Part No.	
	Length	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>		RCA
<b>m</b>	Short	31.8	51.5	88.0	160.3	#2**	1/16*	2T-2SRM	<b>220Z0S-002M</b>
<b>i</b>	Short	1-1/4	2-1/32	3-15/32	6-5/16	#2	1/16	2T-2SR	<b>220Z0S-002I</b>
	Standard	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	2T-2SR	<b>240Z0S-002I</b>
	Extended	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	2T-2SR	<b>250Z0S-002I</b>

\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

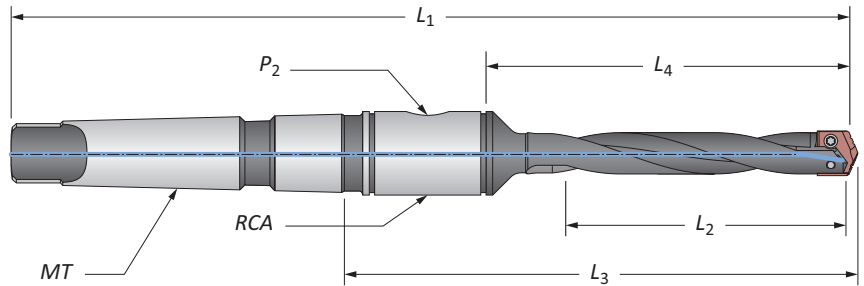

### Helical Flute

	Body				Shank			Part No.	
	Length	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>		RCA
<b>m</b>	Standard	60.3	80.2	116.7	188.9	#2**	1/16*	2T-2SRM	<b>240Z0H-002M</b>
	Extended	111.1	130.9	167.4	239.7	#2**	1/16*	2T-2SRM	<b>250Z0H-002M</b>
<b>i</b>	Standard	2-3/8	3-5/32	4-19/32	7-7/16	#2	1/16	2T-2SR	<b>240Z0H-002I</b>
	Extended	4-3/8	5-5/32	6-19/32	9-7/16	#2	1/16	2T-2SR	<b>250Z0H-002I</b>


\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7247-IP7-1	7247N-IP7-1	8IP-7	8IP-7TL	8IP-7B	84 N-cm (7.4 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



**m** = Metric (mm)


**i** = Imperial (in)

Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.


## T-A Drill Insert Holders

Z Series | Straight Shank | ER Collet | Diameter Range: 11.10 mm - 12.95 mm (0.437" - 0.510")

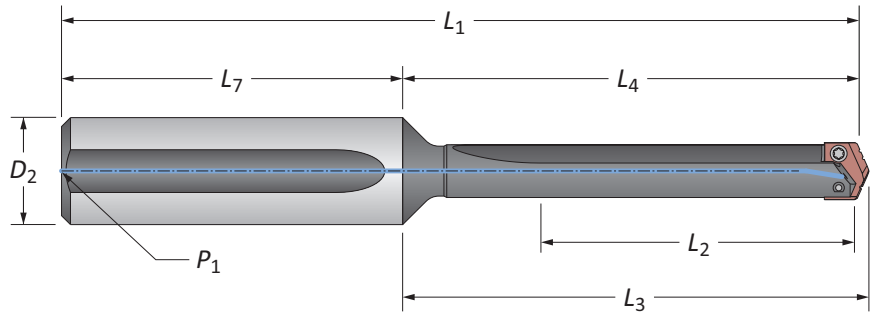

### Straight Flute

Length	Body				Shank			Part No.
	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
Short	1-1/4	2-1/32	2-1/8	4-13/32	3/4	2-3/8	1/8	220Z0S-075L
Standard	2-3/8	3-5/32	3-1/4	5-17/32	3/4	2-3/8	1/8	240Z0S-075L
Extended	4-3/8	5-5/32	5-1/4	7-17/32	3/4	2-3/8	1/8	250Z0S-075L
XL	8-3/4	9-17/32	9-5/8	11-29/32	3/4	2-3/8	1/8	270Z0S-075L
3XL	11-7/16	12-7/32	12-5/16	14-19/32	3/4	2-3/8	1/8	290Z0S-075L

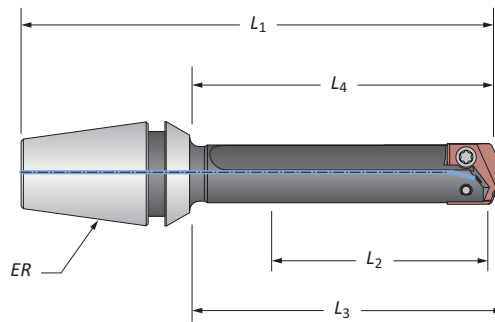

### ER Collet Holder


L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	ER	Part No.	Collet Nut without Retaining Ring
1-3/8	1-29/32	2	3-15/64	ER-20	210Z0S-20ER	ER-20N

## T-A Drill Accessories

Z Series | Rotary Coolant Adapters | Torx® Plus Screws

### Rotary Coolant Adapter (RCA) and Accessories

ID	OD	L <sub>1</sub>	Driving Rod Thread	P <sub>1</sub>	Part No.	RCA O-Rings	
						Kit Part No.**	Replacements
19.05	44.45	22.23	M8 x 1.25	1/8*	2T-2SRM	2T1-2SR	2T1-2OR-10
3/4	1-3/4	7/8	5/16-18	1/8	2T-2SR	2T1-2SR	2T1-2OR-10

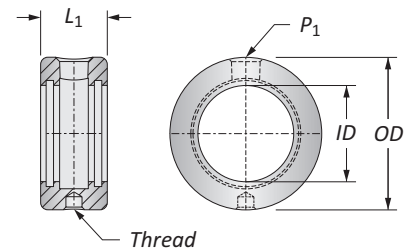



\*Thread to BSP and ISO 7-1 | \*\*RCA Repair Kit includes (2) O-rings, (2) snap rings, and (2) thrust washers  
 ⚠ Refer to page A30: 110 for proper RCA assembly and safety information

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7247-IP7-1	7247N-IP7-1	8IP-7	8IP-7TL	8IP-7B	84 N-cm (7.4 in-lbs)




\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

**⚠ WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.




 = Metric (mm)  
 = Imperial (in)  
 Screws sold in packs of 10  
 O-rings sold in packs of 10

## GEN2 T-A Drill Inserts


0 Series | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")



HSS Inserts – Super Cobalt • Carbide Inserts – K20 (C2) | K35 (C1)

Series	Insert				HSS Part No.			Carbide Part No.		
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200® Super Cobalt	 AM300® K20 (C2)	 AM300® K35 (C1)			
0	13.00	0.5118	–	3.18	450H-13	4C20P-13	4C10P-13			
	13.10	0.5156	33/64	3.18	450H-.515	4C20P-.515	4C10P-.515			
	13.49	0.5313	17/32	3.18	450H-0017	4C20P-0017	4C10P-0017			
	13.50	0.5315	–	3.18	450H-13.5	4C20P-13.5	4C10P-13.5			
	13.89	0.5469	35/64	3.18	450H-.546	4C20P-.546	4C10P-.546			
	14.00	0.5512	–	3.18	450H-14	4C20P-14	4C10P-14			
	14.29	0.5625	9/16	3.18	450H-0018	4C20P-0018	4C10P-0018			
	14.50	0.5709	–	3.18	450H-14.5	4C20P-14.5	4C10P-14.5			
	14.68	0.5781	37/64	3.18	450H-.578	4C20P-.578	4C10P-.578			
	15.00	0.5906	–	3.18	450H-15	4C20P-15	4C10P-15			
0.5	15.08	0.5938	19/32	3.18	450H-0019	4C20P-0019	4C10P-0019			
	15.48	0.6094	39/64	3.18	450H-.609	4C20P-.609	4C10P-.609			
	15.50	0.6102	–	3.18	450H-15.5	4C20P-15.5	4C10P-15.5			
	15.88	0.6250	5/8	3.18	450H-0020	4C20P-0020	4C10P-0020			
	16.00	0.6299	–	3.18	450H-16	4C20P-16	4C10P-16			
	16.27	0.6406	41/64	3.18	450H-.640	4C20P-.640	4C10P-.640			
	16.50	0.6496	–	3.18	450H-16.5	4C20P-16.5	4C10P-16.5			
	16.67	0.6563	21/32	3.18	450H-0021	4C20P-0021	4C10P-0021			
	17.00	0.6693	–	3.18	450H-17	4C20P-17	4C10P-17			
	17.07	0.6719	43/64	3.18	450H-.671	4C20P-.671	4C10P-.671			
17.46	0.6875	11/16	3.18	450H-0022	4C20P-0022	4C10P-0022				
17.50	0.6890	–	3.18	450H-17.5	4C20P-17.5	4C10P-17.5				

**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.

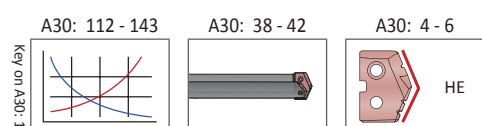




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TIN = 1C2YT-XXXX	TIAlN = 1C2YA-XXXX
TICN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX




Inserts sold in quantities of 2

### T-A Drill Inserts


0 Series | HSS | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")





#### HSS Inserts – Premium Cobalt


Series	Insert				Part No.		
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN
0	13.00	0.5118	–	3.18	<b>180T-13</b>	<b>180A-13</b>	<b>180N-13</b>
	13.10	0.5156	33/64	3.18	<b>180T-.515</b>	<b>180A-.515</b>	<b>180N-.515</b>
	13.49	0.5313	17/32	3.18	<b>180T-0017</b>	<b>180A-0017</b>	<b>180N-0017</b>
	13.50	0.5315	–	3.18	<b>180T-13.5</b>	<b>180A-13.5</b>	<b>180N-13.5</b>
	13.89	0.5469	35/64	3.18	<b>180T-.546</b>	<b>180A-.546</b>	<b>180N-.546</b>
	14.00	0.5512	–	3.18	<b>180T-14</b>	<b>180A-14</b>	<b>180N-14</b>
	14.29	0.5625	9/16	3.18	<b>180T-0018</b>	<b>180A-0018</b>	<b>180N-0018</b>
	14.50	0.5709	–	3.18	<b>180T-14.5</b>	<b>180A-14.5</b>	<b>180N-14.5</b>
	14.68	0.5781	37/64	3.18	<b>180T-.578</b>	<b>180A-.578</b>	<b>180N-.578</b>
	15.00	0.5906	–	3.18	<b>180T-15</b>	<b>180A-15</b>	<b>180N-15</b>
15.08	0.5938	19/32	3.18	<b>180T-0019</b>	<b>180A-0019</b>	<b>180N-0019</b>	
0.5	15.48	0.6094	39/64	3.18	<b>180T-.609</b>	<b>180A-.609</b>	<b>180N-.609</b>
	15.50	0.6102	–	3.18	<b>180T-15.5</b>	<b>180A-15.5</b>	<b>180N-15.5</b>
	15.88	0.6250	5/8	3.18	<b>180T-0020</b>	<b>180A-0020</b>	<b>180N-0020</b>
	16.00	0.6299	–	3.18	<b>180T-16</b>	<b>180A-16</b>	<b>180N-16</b>
	16.27	0.6406	41/64	3.18	<b>180T-.640</b>	<b>180A-.640</b>	<b>180N-.640</b>
	16.50	0.6496	–	3.18	<b>180T-16.5</b>	<b>180A-16.5</b>	<b>180N-16.5</b>
	16.67	0.6563	21/32	3.18	<b>180T-0021</b>	<b>180A-0021</b>	<b>180N-0021</b>
	17.00	0.6693	–	3.18	<b>180T-17</b>	<b>180A-17</b>	<b>180N-17</b>
	17.07	0.6719	43/64	3.18	<b>180T-.671</b>	<b>180A-.671</b>	<b>180N-.671</b>
	17.46	0.6875	11/16	3.18	<b>180T-0022</b>	<b>180A-0022</b>	<b>180N-0022</b>
17.50	0.6890	–	3.18	<b>180T-17.5</b>	<b>180A-17.5</b>	<b>180N-17.5</b>	

**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.

A30: 112 - 143  
  
 Key on A30: 1

A30: 38 - 42  


A30: 4 - 6  
 HI, HR, CR, TC, SK, NP, IN, RN, CN, AN, BR, CI, CP, NC, WC

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 

Inserts sold in quantities of 2



TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

A  
DRILLING  
B  
BORING  
C  
REAMING  
D  
BURNISHING  
E  
THREADING  
X  
SPECIALS



### T-A Drill Inserts

0 Series | HSS | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")



#### HSS Inserts – Super Cobalt



Series	Insert				Part No.		
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	TiN	TiAlN	TiCN
0	13.00	0.5118	–	3.18	150T-13	150A-13	150N-13
	13.10	0.5156	33/64	3.18	150T-.515	150A-.515	150N-.515
	13.49	0.5313	17/32	3.18	150T-0017	150A-0017	150N-0017
	13.50	0.5315	–	3.18	150T-13.5	150A-13.5	150N-13.5
	13.89	0.5469	35/64	3.18	150T-.546	150A-.546	150N-.546
	14.00	0.5512	–	3.18	150T-14	150A-14	150N-14
	14.29	0.5625	9/16	3.18	150T-0018	150A-0018	150N-0018
	14.50	0.5709	–	3.18	150T-14.5	150A-14.5	150N-14.5
	14.68	0.5781	37/64	3.18	150T-.578	150A-.578	150N-.578
	15.00	0.5906	–	3.18	150T-15	150A-15	150N-15
0.5	15.08	0.5938	19/32	3.18	150T-0019	150A-0019	150N-0019
	15.48	0.6094	39/64	3.18	150T-.609	150A-.609	150N-.609
	15.50	0.6102	–	3.18	150T-15.5	150A-15.5	150N-15.5
	15.88	0.6250	5/8	3.18	150T-0020	150A-0020	150N-0020
	16.00	0.6299	–	3.18	150T-16	150A-16	150N-16
	16.27	0.6406	41/64	3.18	150T-.640	150A-.640	150N-.640
	16.50	0.6496	–	3.18	150T-16.5	150A-16.5	150N-16.5
	16.67	0.6563	21/32	3.18	150T-0021	150A-0021	150N-0021
	17.00	0.6693	–	3.18	150T-17	150A-17	150N-17
	17.07	0.6719	43/64	3.18	150T-.671	150A-.671	150N-.671
17.46	0.6875	11/16	3.18	150T-0022	150A-0022	150N-0022	
17.50	0.6890	–	3.18	150T-17.5	150A-17.5	150N-17.5	

**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.

A30: 112 - 143

A30: 38 - 42

A30: 4 - 6



HI, HR, CR, TC, SK,  
NP, IN, RN, CN, AN,  
BR, CI, CP, NC, WC


Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

Inserts sold in quantities of 2




TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

**T-A Drill Inserts**



0 Series | HSS | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")







90° Spot & Chamfer

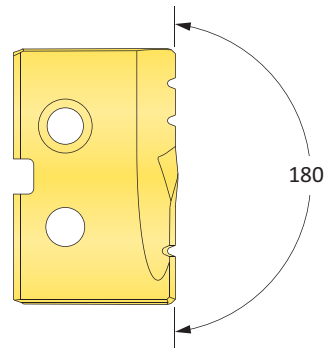

Flat Bottom




**HSS Inserts – Super Cobalt**


Series	Insert				90° Spot & Chamfer Part No.			Flat Bottom Part No.
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN	 TiN
0	13.00	0.5118	–	3.18	150T-13-SP	150A-13-SP	150N-13-SP	150T-13-FB
	13.10	0.5156	33/64	3.18	150T-.515-SP	150A-.515-SP	150N-.515-SP	150T-.515-FB
	13.49	0.5313	17/32	3.18	150T-0017-SP	150A-0017-SP	150N-0017-SP	150T-0017-FB
	13.50	0.5315	–	3.18	150T-13.5-SP	150A-13.5-SP	150N-13.5-SP	150T-13.5-FB
	13.89	0.5469	35/64	3.18	150T-.546-SP	150A-.546-SP	150N-.546-SP	150T-.546-FB
	14.00	0.5512	–	3.18	150T-14-SP	150A-14-SP	150N-14-SP	150T-14-FB
	14.29	0.5625	9/16	3.18	150T-0018-SP	150A-0018-SP	150N-0018-SP	150T-0018-FB
	14.50	0.5709	–	3.18	150T-14.5-SP	150A-14.5-SP	150N-14.5-SP	150T-14.5-FB
	14.68	0.5781	37/64	3.18	150T-.578-SP	150A-.578-SP	150N-.578-SP	150T-.578-FB
	15.00	0.5906	–	3.18	150T-15-SP	150A-15-SP	150N-15-SP	150T-15-FB
15.08	0.5938	19/32	3.18	150T-0019-SP	150A-0019-SP	150N-0019-SP	150T-0019-FB	
0.5	15.48	0.6094	39/64	3.18	150T-.609-SP	150A-.609-SP	150N-.609-SP	150T-.609-FB
	15.50	0.6102	–	3.18	150T-15.5-SP	150A-15.5-SP	150N-15.5-SP	150T-15.5-FB
	15.88	0.6250	5/8	3.18	150T-0020-SP	150A-0020-SP	150N-0020-SP	150T-0020-FB
	16.00	0.6299	–	3.18	150T-16-SP	150A-16-SP	150N-16-SP	150T-16-FB
	16.27	0.6406	41/64	3.18	150T-.640-SP	150A-.640-SP	150N-.640-SP	150T-.640-FB
	16.50	0.6496	–	3.18	150T-16.5-SP	150A-16.5-SP	150N-16.5-SP	150T-16.5-FB
	16.67	0.6563	21/32	3.18	150T-0021-SP	150A-0021-SP	150N-0021-SP	150T-0021-FB
	17.00	0.6693	–	3.18	150T-17-SP	150A-17-SP	150N-17-SP	150T-17-FB
	17.07	0.6719	43/64	3.18	150T-.671-SP	150A-.671-SP	150N-.671-SP	150T-.671-FB
	17.46	0.6875	11/16	3.18	150T-0022-SP	150A-0022-SP	150N-0022-SP	150T-0022-FB
17.50	0.6890	–	3.18	150T-17.5-SP	150A-17.5-SP	150N-17.5-SP	150T-17.5-FB	

**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.


A30: 112 - 143




A30: 38 - 42




A30: 4 - 6



A30: 4 - 6




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 

Inserts sold in quantities of 2


TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

### T-A Drill Inserts



0 Series | Carbide | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")




Standard




132°






Flat Bottom



180°




#### Carbide Inserts – K20 (C2)


Series	Insert				Part No.		Flat Bottom Part No.
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	 TiN	 TiAlN	 TiN
0	13.00	0.5118	–	3.18	<b>1C20T-13</b>	<b>1C20A-13</b>	<b>1C20T-13-FB</b>
	13.10	0.5156	33/64	3.18	<b>1C20T-.515</b>	<b>1C20A-.515</b>	<b>1C20T-.515-FB</b>
	13.49	0.5313	17/32	3.18	<b>1C20T-0017</b>	<b>1C20A-0017</b>	<b>1C20T-0017-FB</b>
	13.50	0.5315	–	3.18	<b>1C20T-13.5</b>	<b>1C20A-13.5</b>	<b>1C20T-13.5-FB</b>
	13.89	0.5469	35/64	3.18	<b>1C20T-.546</b>	<b>1C20A-.546</b>	<b>1C20T-.546-FB</b>
	14.00	0.5512	–	3.18	<b>1C20T-14</b>	<b>1C20A-14</b>	<b>1C20T-14-FB</b>
	14.29	0.5625	9/16	3.18	<b>1C20T-0018</b>	<b>1C20A-0018</b>	<b>1C20T-0018-FB</b>
	14.50	0.5709	–	3.18	<b>1C20T-14.5</b>	<b>1C20A-14.5</b>	<b>1C20T-14.5-FB</b>
	14.68	0.5781	37/64	3.18	<b>1C20T-.578</b>	<b>1C20A-.578</b>	<b>1C20T-.578-FB</b>
	15.00	0.5906	–	3.18	<b>1C20T-15</b>	<b>1C20A-15</b>	<b>1C20T-15-FB</b>
0.5	15.08	0.5938	19/32	3.18	<b>1C20T-0019</b>	<b>1C20A-0019</b>	<b>1C20T-0019-FB</b>
	15.48	0.6094	39/64	3.18	<b>1C20T-.609</b>	<b>1C20A-.609</b>	<b>1C20T-.609-FB</b>
	15.50	0.6102	–	3.18	<b>1C20T-15.5</b>	<b>1C20A-15.5</b>	<b>1C20T-15.5-FB</b>
	15.88	0.6250	5/8	3.18	<b>1C20T-0020</b>	<b>1C20A-0020</b>	<b>1C20T-0020-FB</b>
	16.00	0.6299	–	3.18	<b>1C20T-16</b>	<b>1C20A-16</b>	<b>1C20T-16-FB</b>
	16.27	0.6406	41/64	3.18	<b>1C20T-.640</b>	<b>1C20A-.640</b>	<b>1C20T-.640-FB</b>
	16.50	0.6496	–	3.18	<b>1C20T-16.5</b>	<b>1C20A-16.5</b>	<b>1C20T-16.5-FB</b>
	16.67	0.6563	21/32	3.18	<b>1C20T-0021</b>	<b>1C20A-0021</b>	<b>1C20T-0021-FB</b>
	17.00	0.6693	–	3.18	<b>1C20T-17</b>	<b>1C20A-17</b>	<b>1C20T-17-FB</b>
	17.07	0.6719	43/64	3.18	<b>1C20T-.671</b>	<b>1C20A-.671</b>	<b>1C20T-.671-FB</b>
	17.46	0.6875	11/16	3.18	<b>1C20T-0022</b>	<b>1C20A-0022</b>	<b>1C20T-0022-FB</b>
	17.50	0.6890	–	3.18	<b>1C20T-17.5</b>	<b>1C20A-17.5</b>	<b>1C20T-17.5-FB</b>

**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.


A30: 112 - 143



A30: 38 - 42




A30: 4 - 6



HI, HR, CR, TC, SK,  
NP, IN, RN, CN,  
AN, BR, CI, CP, NC,  
WC, BT

A30: 4 - 6



FN




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX





Inserts sold in quantities of 2

### T-A Drill Inserts

0 Series | Carbide | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")






Carbide Inserts – P40 (C5) | K10 (C3) | N2

Series	Insert				C5 Part No.		C3 Part No.	N2 Part No.
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	 TiN	 TiAlN	 TiAlN (Cast Iron)	 Diamond Film*
0	13.00	0.5118	–	3.18	<b>1C50T-13</b>	<b>1C50A-13</b>	<b>1C30A-13-CI</b>	<b>1N20D-13</b>
	13.10	0.5156	33/64	3.18	<b>1C50T-.515</b>	<b>1C50A-.515</b>	<b>1C30A-.515-CI</b>	<b>1N20D-.515</b>
	13.49	0.5313	17/32	3.18	<b>1C50T-0017</b>	<b>1C50A-0017</b>	<b>1C30A-0017-CI</b>	<b>1N20D-0017</b>
	13.50	0.5315	–	3.18	<b>1C50T-13.5</b>	<b>1C50A-13.5</b>	<b>1C30A-13.5-CI</b>	<b>1N20D-13.5</b>
	13.89	0.5469	35/64	3.18	<b>1C50T-.546</b>	<b>1C50A-.546</b>	<b>1C30A-.546-CI</b>	<b>1N20D-.546</b>
	14.00	0.5512	–	3.18	<b>1C50T-14</b>	<b>1C50A-14</b>	<b>1C30A-14-CI</b>	<b>1N20D-14</b>
	14.29	0.5625	9/16	3.18	<b>1C50T-0018</b>	<b>1C50A-0018</b>	<b>1C30A-0018-CI</b>	<b>1N20D-0018</b>
	14.50	0.5709	–	3.18	<b>1C50T-14.5</b>	<b>1C50A-14.5</b>	<b>1C30A-14.5-CI</b>	<b>1N20D-14.5</b>
	14.68	0.5781	37/64	3.18	<b>1C50T-.578</b>	<b>1C50A-.578</b>	<b>1C30A-.578-CI</b>	<b>1N20D-.578</b>
	15.00	0.5906	–	3.18	<b>1C50T-15</b>	<b>1C50A-15</b>	<b>1C30A-15-CI</b>	<b>1N20D-15</b>
15.08	0.5938	19/32	3.18	<b>1C50T-0019</b>	<b>1C50A-0019</b>	<b>1C30A-0019-CI</b>	<b>1N20D-0019</b>	
0.5	15.48	0.6094	39/64	3.18	<b>1C50T-.609</b>	<b>1C50A-.609</b>	<b>1C30A-.609-CI</b>	<b>1N20D-.609</b>
	15.50	0.6102	–	3.18	<b>1C50T-15.5</b>	<b>1C50A-15.5</b>	<b>1C30A-15.5-CI</b>	<b>1N20D-15.5</b>
	15.88	0.6250	5/8	3.18	<b>1C50T-0020</b>	<b>1C50A-0020</b>	<b>1C30A-0020-CI</b>	<b>1N20D-0020</b>
	16.00	0.6299	–	3.18	<b>1C50T-16</b>	<b>1C50A-16</b>	<b>1C30A-16-CI</b>	<b>1N20D-16</b>
	16.27	0.6406	41/64	3.18	<b>1C50T-.640</b>	<b>1C50A-.640</b>	<b>1C30A-.640-CI</b>	<b>1N20D-.640</b>
	16.50	0.6496	–	3.18	<b>1C50T-16.5</b>	<b>1C50A-16.5</b>	<b>1C30A-16.5-CI</b>	<b>1N20D-16.5</b>
	16.67	0.6563	21/32	3.18	<b>1C50T-0021</b>	<b>1C50A-0021</b>	<b>1C30A-0021-CI</b>	<b>1N20D-0021</b>
	17.00	0.6693	–	3.18	<b>1C50T-17</b>	<b>1C50A-17</b>	<b>1C30A-17-CI</b>	<b>1N20D-17</b>
	17.07	0.6719	43/64	3.18	<b>1C50T-.671</b>	<b>1C50A-.671</b>	<b>1C30A-.671-CI</b>	<b>1N20D-.671</b>
	17.46	0.6875	11/16	3.18	<b>1C50T-0022</b>	<b>1C50A-0022</b>	<b>1C30A-0022-CI</b>	<b>1N20D-0022</b>
17.50	0.6890	–	3.18	<b>1C50T-17.5</b>	<b>1C50A-17.5</b>	<b>1C30A-17.5-CI</b>	<b>1N20D-17.5</b>	

**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.

\*Diamond Film is only available in standard geometry. For additional geometries, please contact Application Engineering.





Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

Inserts sold in quantities of 2

<b>TiN</b> = 1C2YT-XXXX	<b>TiAlN</b> = 1C2YA-XXXX
<b>TiCN</b> = 1C2YN-XXXX	<b>AM200®</b> = 1C2YH-XXXX

## T-A Drill Insert Holders

0 Series | Flange Shank | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")

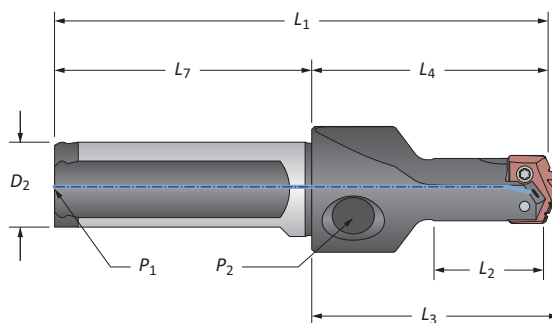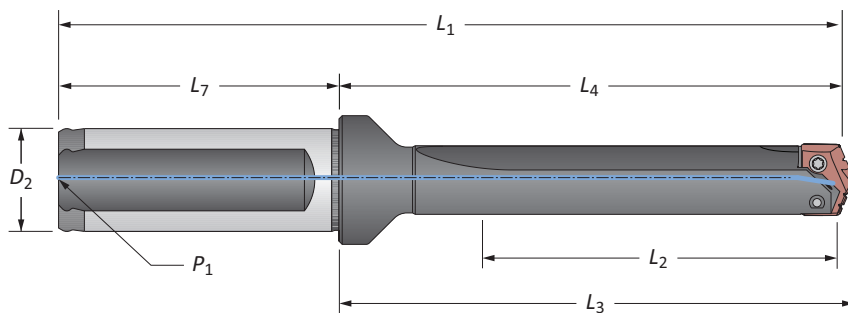

Stub Length

### Straight Flute

Series	Length	Body				Shank			Part No.	
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>		
m	0	Stub	22.2	47.6	50.4	97.6	20.0	50.0	1/8*	21000S-20FM
		Short	34.9	63.5	66.3	113.5	20.0	50.0	1/8*	22000S-20FM
		Standard	64.0	92.1	94.1	142.1	20.0	50.0	1/8*	24000S-20FM
		XL	295.0	323.9	326.7	373.9	20.0	50.0	1/8*	27000S-20FM
		3XL	387.0	416.0	418.8	466.0	20.0	50.0	1/8*	29000S-20FM
0.5	Stub	22.2	47.6	50.4	97.6	20.0	50.0	1/8*	21005S-20FM	
	Short	34.9	63.5	66.3	113.5	20.0	50.0	1/8*	22005S-20FM	
i	0	Stub	7/8	1-7/8	1-63/64	3-29/32	3/4	2-1/32	1/8	21000S-075F
		Short	1-3/8	2-1/2	2-39/64	4-17/32	3/4	2-1/32	1/8	22000S-075F
		Standard	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8	24000S-075F
		Extended	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8	25000S-075F
	0.5	Stub	7/8	1-7/8	1-63/64	3-29/32	3/4	2-1/32	1/8	21005S-075F
		Short	1-3/8	2-1/2	2-39/64	4-17/32	3/4	2-1/32	1/8	22005S-075F
		Standard	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8	24005S-075F
		Extended	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8	25005S-075F

\*Metric thread to BSP and ISO 7-1

**NOTE:** Stub length holders have a 1/8" side pipe tap (P<sub>2</sub>)

**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.


### Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
0	72556-IP8-1	72556N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)
0.5	72567-IP8-1	72567N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 32 - 37

A30: 43 & 111



m = Metric (mm)


i = Imperial (in)

Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

0 Series | Flange Shank | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")

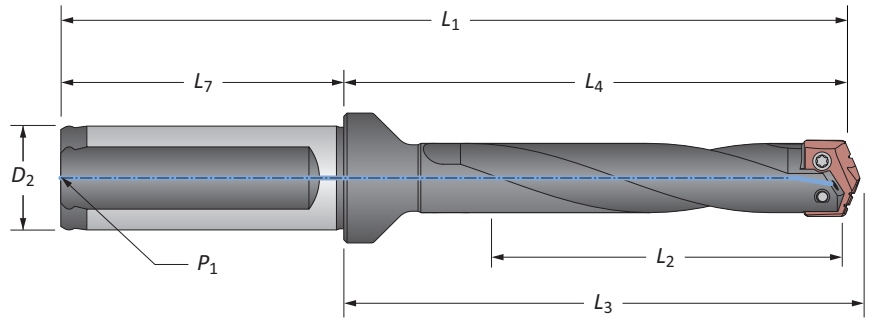

### Helical Flute

Series	Length	Body				Shank			Part No.	
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>		
Ⓜ	0	Standard	63.5	92.1	94.9	142.1	20.0	50.0	1/8*	24000H-20FM
	Standard Plus	89.0	117.6	120.4	167.6	20.0	50.0	1/8*	24500H-20FM	
	Extended	114.3	142.9	145.7	192.9	20.0	50.0	1/8*	⚠ 25000H-20FM	
	Long	177.8	206.4	209.1	256.4	20.0	50.0	1/8*	⚠ 26000H-20FM	
	Long Plus	240.0	268.6	271.4	318.6	20.0	50.0	1/8*	⚠ 26500H-20FM	
0.5	Standard	63.5	92.1	94.9	142.1	20.0	50.0	1/8*	24005H-20FM	
	Extended	114.3	142.9	145.7	192.9	20.0	50.0	1/8*	⚠ 25005H-20FM	
	Long	177.8	206.4	209.1	256.4	20.0	50.0	1/8*	⚠ 26005H-20FM	
Ⓜ	0	Standard	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8	24000H-075F
		Standard Plus	3-1/2	4-5/8	4-37/64	6-39/64	3/4	2-1/32	1/8	24500H-075F
		Extended	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8	⚠ 25000H-075F
		Long	7	8-1/8	8-15/64	10-5/32	3/4	2-1/32	1/8	⚠ 26000H-075F
		Long Plus	9-7/16	10-37/64	10-11/16	12-23/32	3/4	2-1/32	1/8	⚠ 26500H-075F
	0.5	Standard	2-1/2	3-5/8	3-47/64	5-21/32	3/4	2-1/32	1/8	24005H-075F
		Extended	4-1/2	5-5/8	5-47/64	7-21/32	3/4	2-1/32	1/8	⚠ 25005H-075F
		Long	7	8-1/8	8-15/64	10-5/32	3/4	2-1/32	1/8	⚠ 26005H-075F

\*Metric thread to BSP and ISO 7-1


**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.

### Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
0	72556-IP8-1	72556N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)
0.5	72567-IP8-1	72567N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 32 - 37



Ⓜ = Metric (mm)


Ⓜ = Imperial (in)

Screws sold in quantities of 10

**⚠ WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

0 Series | Taper Shank | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")

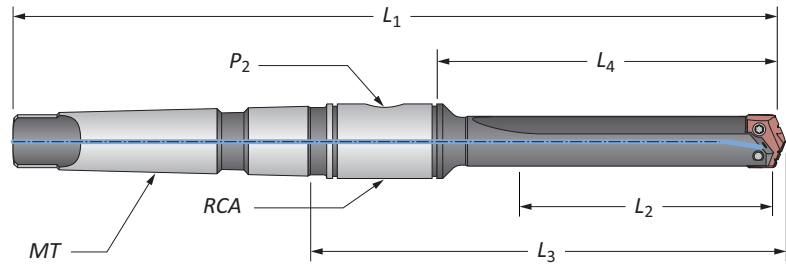

### Straight Flute

Series	Length	Body				Shank			Part No.	
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA		
<b>m</b>	0	Short	35.0	55.5	92.4	164.3	#2**	1/16*	2T-2SRM	<b>22000S-002M</b>
	0.5	Short	35.0	55.5	92.4	164.3	#2**	1/16*	2T-2SRM	<b>22005S-002M</b>
<b>i</b>	0	Short	1-3/8	2-3/16	3-41/64	6-15/32	#2	1/16	2T-2SR	<b>22000S-002I</b>
		Standard	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	2T-2SR	<b>24000S-002I</b>
		Extended	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	2T-2SR	<b>25000S-002I</b>
	0.5	Short	1-3/8	2-3/16	3-41/64	6-15/32	#2	1/16	2T-2SR	<b>22005S-002I</b>
		Standard	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	2T-2SR	<b>24005S-002I</b>
		Extended	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	2T-2SR	<b>25005S-002I</b>

\*Metric thread to BSP and ISO 7-1


\*\*Per ISO 296 type BEK

**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.

### Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
0	72556-IP8-1	72556N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)
0.5	72567-IP8-1	72567N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

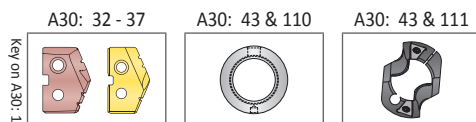

**m** = Metric (mm)

**i** = Imperial (in)


Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.



## T-A Drill Insert Holders

0 Series | Taper Shank | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")

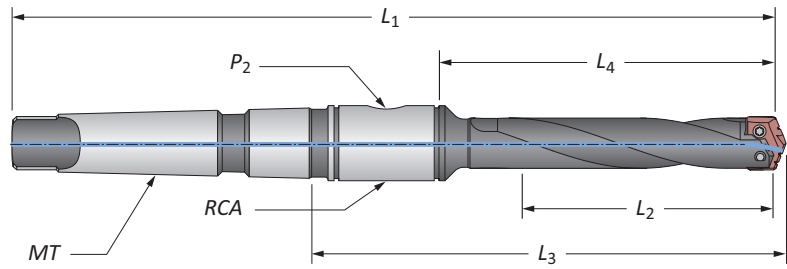

### Helical Flute

Series	Length	Body				Shank			Part No.	
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA		
Ⓜ	0	Standard	63.5	84.1	121.0	192.9	#2**	1/16*	2T-2SRM	24000H-002M
	Extended	114.3	135.0	171.8	243.7	#2**	1/16*	2T-2SRM	⚠ 25000H-002M	
	Long	177.8	198.5	235.3	307.2	#2**	1/16*	2T-2SRM	⚠ 26000H-002M	
Ⓜ	0.5	Standard	63.5	84.1	121.0	192.9	#2**	1/16*	2T-2SRM	24005H-002M
	Extended	114.3	135.0	171.8	243.7	#2**	1/16*	2T-2SRM	⚠ 25005H-002M	
	Long	177.8	198.5	235.3	307.2	#2**	1/16*	2T-2SRM	⚠ 26005H-002M	
Ⓜ	0	Standard	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	2T-2SR	24000H-002I
		Extended	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	2T-2SR	⚠ 25000H-002I
		Long	7	7-13/16	8-17/64	12-3/32	#2	1/16	2T-2SR	⚠ 26000H-002I
	0.5	Standard	2-1/2	3-5/16	4-49/64	7-19/32	#2	1/16	2T-2SR	24005H-002I
		Extended	4-1/2	5-5/16	6-49/64	9-19/32	#2	1/16	2T-2SR	⚠ 25005H-002I
		Long	7	7-13/16	8-17/64	12-3/32	#2	1/16	2T-2SR	⚠ 26005H-002I

\*Metric thread to BSP and ISO 7-1


\*\*Per ISO 296 type BEK

**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.

### Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
0	72556-IP8-1	72556N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)
0.5	72567-IP8-1	72567N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength




Ⓜ = Metric (mm)  
Ⓜ = Imperial (in)

Screws sold in quantities of 10

**⚠ WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders


0 Series | Straight Shank | ER Collet | Diameter Range: 12.98 mm - 17.65 mm (0.511" - 0.695")

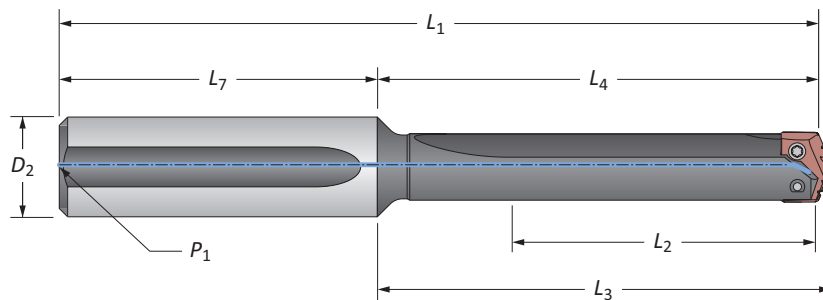

### Straight Flute

Series	Length	Body				Shank			Part No.
		$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
0	Short	1-3/8	2-3/16	2-19/64	4-9/16	3/4	2-3/8	1/8	22000S-075L
	Standard	2-1/2	3-5/16	3-27/64	5-11/16	3/4	2-3/8	1/8	24000S-075L
	Extended	4-1/2	5-5/16	5-27/64	7-11/16	3/4	2-3/8	1/8	25000S-075L
	Long	7	7-13/16	7-59/64	10-3/16	3/4	2-3/8	1/8	26000S-075L
	XL	11-5/8	12-7/16	12-35/64	14-13/16	3/4	2-3/8	1/8	27000S-075L
0.5	3XL	15-1/4	16-1/16	16-11/64	18-7/16	3/4	2-3/8	1/8	29000S-075L
	Short	1-3/8	2-3/16	2-19/64	4-9/16	3/4	2-3/8	1/8*	22005S-075L
	Standard	2-1/2	3-5/16	3-27/64	5-11/16	3/4	2-3/8	1/8*	24005S-075L
	Extended	4-1/2	5-5/16	5-27/64	7-11/16	3/4	2-3/8	1/8*	25005S-075L
	Long	7	7-13/16	7-59/64	10-3/16	3/4	2-3/8	1/8*	26005S-075L

**NOTE:** 0.5 series inserts fit into both 0 and 0.5 series holders. However, 0 series inserts ONLY fit into 0 series holders. See page A30: 7 for visual.

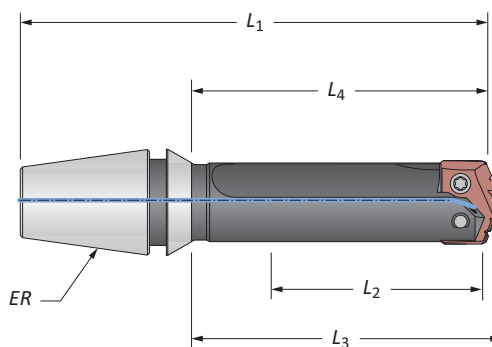

### ER Collet Holder

Series	Body				ER	Part No.	Collet Nut without Retaining Ring
	$L_2$	$L_4$	$L_3$	$L_1$			
0	1-3/8	1-57/64	2	3-5/64	ER-16	21000S-16ER	ER-16N
	1-3/8	1-57/64	2	3-15/64	ER-20	21000S-20ER	ER-20N


### Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
0	72556-IP8-1	72556N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)
0.5	72567-IP8-1	72567N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 32 - 37

A30: 43 & 111



= Metric (mm)

= Imperial (in)


Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.



T-A Drill Accessories

0 Series | Chamfer Rings | Rotary Coolant Adapters | Torx® Plus Screws

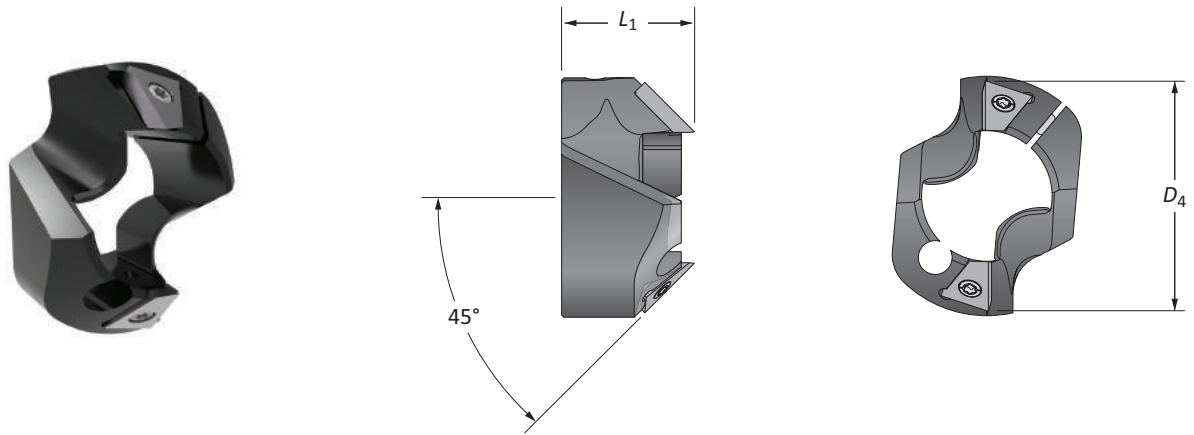


T-ACR 45 Chamfer Ring

Holder Series	D <sub>1</sub> Range	Chamfer Ring		Part No.	Insert Part No.	Insert Screw	Insert Driver	Clamping Screw	Insert Driver
		D <sub>4</sub>	L <sub>1</sub>						
0	0.5118 - 0.6890	13/16	0.676	T-ACR-45-0	T-ACRI-45-B-C5A	7255-IP8-1	8IP-8	7375-IP9-1	8IP-9

Rotary Coolant Adapter (RCA) and Accessories

ID	OD	L <sub>1</sub>	Driving Rod Thread	P <sub>1</sub>	Part No.	RCA O-Rings	
						Kit Part No.**	Replacements
Ⓜ 19.05	44.45	22.23	M8 x 1.25	1/8*	⚠ 2T-2SRM	2T1-2SR	2T1-2OR-10
ⓘ 3/4	1-3/4	7/8	5/16-18	1/8	⚠ 2T-2SR	2T1-2SR	2T1-2OR-10

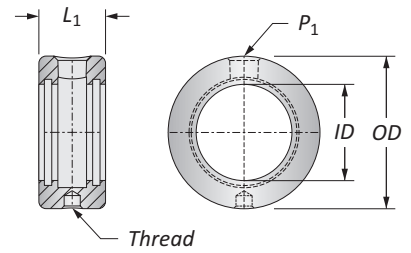

\*Thread to BSP and ISO 7-1


\*\*RCA Repair Kit includes (2) O-rings, (2) snap rings, and (2) thrust washers

⚠ Refer to page A30: 110 for proper RCA assembly and safety information

Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
0	72556-IP8-1	72556N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)
0.5	72567-IP8-1	72567N-IP8-1	8IP-8	8IP-8TL	8IP-8B	175 N-cm (15.5 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



Ⓜ = Metric (mm)




ⓘ = Imperial (in)

Chamfer Ring Inserts sold separately  
Screws sold in packs of 10  
O-rings sold in packs of 10




**⚠ WARNING** RCA rotation during drilling can cause hose and/or hose fitting failure, machinery damage, and/or serious injury. To prevent, use RCA and positive stop studs when drilling. Factory technical assistance is also available for your specific applications.

## GEN2 T-A Drill Inserts


1 Series | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")



HSS Inserts – Super Cobalt • Carbide Inserts – K20 (C2) | K35 (C1)

Series	Insert				HSS Part No.	Carbide Part No.	
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200® Super Cobalt	 AM300® K20 (C2)	 AM300® K35 (C1)
1	17.86	0.7031	45/64	3.97	451H-.703	4C21P-.703	4C11P-.703
	18.00	0.7087	–	3.97	451H-18	4C21P-18	4C11P-18
	18.26	0.7188	23/32	3.97	451H-0023	4C21P-0023	4C11P-0023
	18.50	0.7283	–	3.97	451H-18.5	4C21P-18.5	4C11P-18.5
	18.65	0.7344	47/64	3.97	451H-.734	4C21P-.734	4C11P-.734
	19.00	0.7480	–	3.97	451H-19	4C21P-19	4C11P-19
	19.05	0.7500	3/4	3.97	451H-0024	4C21P-0024	4C11P-0024
	19.45	0.7656	49/64	3.97	451H-.765	4C21P-.765	4C11P-.765
	19.50	0.7677	–	3.97	451H-19.5	4C21P-19.5	4C11P-19.5
	19.84	0.7813	25/32	3.97	451H-0025	4C21P-0025	4C11P-0025
	20.00	0.7874	–	3.97	451H-20	4C21P-20	4C11P-20
	20.24	0.7969	51/64	3.97	451H-.796	4C21P-.796	4C11P-.796
	20.34	0.8010	–	3.97	451H-.801	4C21P-.801	4C11P-.801
	20.50	0.8071	–	3.97	451H-20.5	4C21P-20.5	4C11P-20.5
	20.64	0.8125	13/16	3.97	451H-0026	4C21P-0026	4C11P-0026
	21.00	0.8268	–	3.97	451H-21	4C21P-21	4C11P-21
	21.43	0.8438	27/32	3.97	451H-0027	4C21P-0027	4C11P-0027
21.50	0.8465	–	3.97	451H-21.5	4C21P-21.5	4C11P-21.5	
1.5	21.83	0.8594	55/64	3.97	451H-.859	4C21P-.859	4C11P-.859
	22.00	0.8661	–	3.97	451H-22	4C21P-22	4C11P-22
	22.23	0.8750	7/8	3.97	451H-0028	4C21P-0028	4C11P-0028
	22.50	0.8858	–	3.97	451H-22.5	4C21P-22.5	4C11P-22.5
	22.62	0.8906	57/64	3.97	451H-.890	4C21P-.890	4C11P-.890
	23.00	0.9055	–	3.97	451H-23	4C21P-23	4C11P-23
	23.02	0.9063	29/32	3.97	451H-0029	4C21P-0029	4C11P-0029
	23.42	0.9219	59/64	3.97	451H-.921	4C21P-.921	4C11P-.921
	23.50	0.9252	–	3.97	451H-23.5	4C21P-23.5	4C11P-23.5
	23.81	0.9375	15/16	3.97	451H-0030	4C21P-0030	4C11P-0030
	24.00	0.9449	–	3.97	451H-24	4C21P-24	4C11P-24

**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.





Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TIN = 1C2YT-XXXX	TIAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX




Inserts sold in quantities of 2

### T-A Drill Inserts




1 Series | HSS | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")




#### HSS Inserts – Premium Cobalt

Series	Insert				Part No.		
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN
1	17.86	0.7031	45/64	3.97	181T-703	181A-703	181N-703
	18.00	0.7087	–	3.97	181T-18	181A-18	181N-18
	18.26	0.7188	23/32	3.97	181T-0023	181A-0023	181N-0023
	18.50	0.7283	–	3.97	181T-18.5	181A-18.5	181N-18.5
	18.65	0.7344	47/64	3.97	181T-734	181A-734	181N-734
	19.00	0.7480	–	3.97	181T-19	181A-19	181N-19
	19.05	0.7500	3/4	3.97	181T-0024	181A-0024	181N-0024
	19.45	0.7656	49/64	3.97	181T-765	181A-765	181N-765
	19.50	0.7677	–	3.97	181T-19.5	181A-19.5	181N-19.5
	19.84	0.7813	25/32	3.97	181T-0025	181A-0025	181N-0025
	20.00	0.7874	–	3.97	181T-20	181A-20	181N-20
	20.24	0.7969	51/64	3.97	181T-796	181A-796	181N-796
	20.34	0.8010	–	3.97	181T-801	181A-801	181N-801
	20.50	0.8071	–	3.97	181T-20.5	181A-20.5	181N-20.5
	20.64	0.8125	13/16	3.97	181T-0026	181A-0026	181N-0026
	21.00	0.8268	–	3.97	181T-21	181A-21	181N-21
	21.43	0.8438	27/32	3.97	181T-0027	181A-0027	181N-0027
21.50	0.8465	–	3.97	181T-21.5	181A-21.5	181N-21.5	
1.5	21.83	0.8594	55/64	3.97	181T-859	181A-859	181N-859
	22.00	0.8661	–	3.97	181T-22	181A-22	181N-22
	22.23	0.8750	7/8	3.97	181T-0028	181A-0028	181N-0028
	22.50	0.8858	–	3.97	181T-22.5	181A-22.5	181N-22.5
	22.62	0.8906	57/64	3.97	181T-890	181A-890	181N-890
	23.00	0.9055	–	3.97	181T-23	181A-23	181N-23
	23.02	0.9063	29/32	3.97	181T-0029	181A-0029	181N-0029
	23.42	0.9219	59/64	3.97	181T-921	181A-921	181N-921
	23.50	0.9252	–	3.97	181T-23.5	181A-23.5	181N-23.5
	23.81	0.9375	15/16	3.97	181T-0030	181A-0030	181N-0030
	24.00	0.9449	–	3.97	181T-24	181A-24	181N-24

**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.





Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 

Inserts sold in quantities of 2




TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

## T-A Drill Inserts

1 Series | HSS | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")






### HSS Inserts – Super Cobalt

Series	Insert				Part No.		
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN
1	17.86	0.7031	45/64	3.97	151T-.703	151A-.703	151N-.703
	18.00	0.7087	–	3.97	151T-18	151A-18	151N-18
	18.26	0.7188	23/32	3.97	151T-0023	151A-0023	151N-0023
	18.50	0.7283	–	3.97	151T-18.5	151A-18.5	151N-18.5
	18.65	0.7344	47/64	3.97	151T-.734	151A-.734	151N-.734
	19.00	0.7480	–	3.97	151T-19	151A-19	151N-19
	19.05	0.7500	3/4	3.97	151T-0024	151A-0024	151N-0024
	19.45	0.7656	49/64	3.97	151T-.765	151A-.765	151N-.765
	19.50	0.7677	–	3.97	151T-19.5	151A-19.5	151N-19.5
	19.84	0.7813	25/32	3.97	151T-0025	151A-0025	151N-0025
	20.00	0.7874	–	3.97	151T-20	151A-20	151N-20
	20.24	0.7969	51/64	3.97	151T-.796	151A-.796	151N-.796
	20.34	0.8010	–	3.97	151T-.801	151A-.801	151N-.801
	20.50	0.8071	–	3.97	151T-20.5	151A-20.5	151N-20.5
	20.64	0.8125	13/16	3.97	151T-0026	151A-0026	151N-0026
	21.00	0.8268	–	3.97	151T-21	151A-21	151N-21
	21.43	0.8438	27/32	3.97	151T-0027	151A-0027	151N-0027
21.50	0.8465	–	3.97	151T-21.5	151A-21.5	151N-21.5	
1.5	21.83	0.8594	55/64	3.97	151T-.859	151A-.859	151N-.859
	22.00	0.8661	–	3.97	151T-22	151A-22	151N-22
	22.23	0.8750	7/8	3.97	151T-0028	151A-0028	151N-0028
	22.50	0.8858	–	3.97	151T-22.5	151A-22.5	151N-22.5
	22.62	0.8906	57/64	3.97	151T-.890	151A-.890	151N-.890
	23.00	0.9055	–	3.97	151T-23	151A-23	151N-23
	23.02	0.9063	29/32	3.97	151T-0029	151A-0029	151N-0029
	23.42	0.9219	59/64	3.97	151T-.921	151A-.921	151N-.921
	23.50	0.9252	–	3.97	151T-23.5	151A-23.5	151N-23.5
	23.81	0.9375	15/16	3.97	151T-0030	151A-0030	151N-0030
	24.00	0.9449	–	3.97	151T-24	151A-24	151N-24

**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.

Inserts sold in quantities of 2




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →



TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

**T-A Drill Inserts**


1 Series | HSS | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")



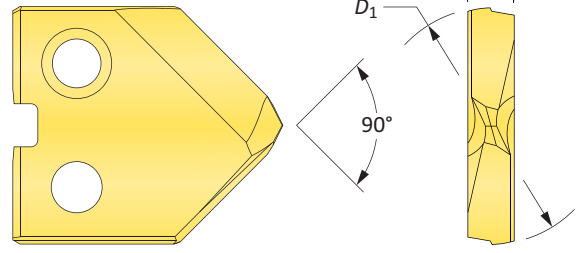



90° Spot & Chamfer

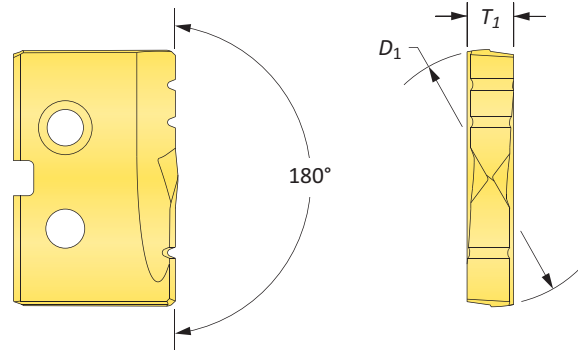

Flat Bottom




**HSS Inserts – Super Cobalt**

Series	Insert				90° Spot & Chamfer Part No.			Flat Bottom Part No.
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	 TiN	 TiAlN	 TiCN	 TiN
1	17.86	0.7031	45/64	3.97	151T-.703-SP	151A-.703-SP	151N-.703-SP	151T-.703-FB
	18.00	0.7087	–	3.97	151T-18-SP	151A-18-SP	151N-18-SP	151T-18-FB
	18.26	0.7188	23/32	3.97	151T-0023-SP	151A-0023-SP	151N-0023-SP	151T-0023-FB
	18.50	0.7283	–	3.97	151T-18.5-SP	151A-18.5-SP	151N-18.5-SP	151T-18.5-FB
	18.65	0.7344	47/64	3.97	151T-.734-SP	151A-.734-SP	151N-.734-SP	151T-.734-FB
	19.00	0.7480	–	3.97	151T-19-SP	151A-19-SP	151N-19-SP	151T-19-FB
	19.05	0.7500	3/4	3.97	151T-0024-SP	151A-0024-SP	151N-0024-SP	151T-0024-FB
	19.45	0.7656	49/64	3.97	151T-.765-SP	151A-.765-SP	151N-.765-SP	151T-.765-FB
	19.50	0.7677	–	3.97	151T-19.5-SP	151A-19.5-SP	151N-19.5-SP	151T-19.5-FB
	19.84	0.7813	25/32	3.97	151T-0025-SP	151A-0025-SP	151N-0025-SP	151T-0025-FB
	20.00	0.7874	–	3.97	151T-20-SP	151A-20-SP	151N-20-SP	151T-20-FB
	20.24	0.7969	51/64	3.97	151T-.796-SP	151A-.796-SP	151N-.796-SP	151T-.796-FB
	20.34	0.8010	–	3.97	151T-.801-SP	151A-.801-SP	151N-.801-SP	151T-.801-FB
	20.50	0.8071	–	3.97	151T-20.5-SP	151A-20.5-SP	151N-20.5-SP	151T-20.5-FB
	20.64	0.8125	13/16	3.97	151T-0026-SP	151A-0026-SP	151N-0026-SP	151T-0026-FB
	21.00	0.8268	–	3.97	151T-21-SP	151A-21-SP	151N-21-SP	151T-21-FB
21.43	0.8438	27/32	3.97	151T-0027-SP	151A-0027-SP	151N-0027-SP	151T-0027-FB	
21.50	0.8465	–	3.97	151T-21.5-SP	151A-21.5-SP	151N-21.5-SP	151T-21.5-FB	
1.5	21.83	0.8594	55/64	3.97	151T-.859-SP	151A-.859-SP	151N-.859-SP	151T-.859-FB
	22.00	0.8661	–	3.97	151T-22-SP	151A-22-SP	151N-22-SP	151T-22-FB
	22.23	0.8750	7/8	3.97	151T-0028-SP	151A-0028-SP	151N-0028-SP	151T-0028-FB
	22.50	0.8858	–	3.97	151T-22.5-SP	151A-22.5-SP	151N-22.5-SP	151T-22.5-FB
	22.62	0.8906	57/64	3.97	151T-.890-SP	151A-.890-SP	151N-.890-SP	151T-.890-FB
	23.00	0.9055	–	3.97	151T-23-SP	151A-23-SP	151N-23-SP	151T-23-FB
	23.02	0.9063	29/32	3.97	151T-0029-SP	151A-0029-SP	151N-0029-SP	151T-0029-FB
	23.42	0.9219	59/64	3.97	151T-.921-SP	151A-.921-SP	151N-.921-SP	151T-.921-FB
	23.50	0.9252	–	3.97	151T-23.5-SP	151A-23.5-SP	151N-23.5-SP	151T-23.5-FB
	23.81	0.9375	15/16	3.97	151T-0030-SP	151A-0030-SP	151N-0030-SP	151T-0030-FB
24.00	0.9449	–	3.97	151T-24-SP	151A-24-SP	151N-24-SP	151T-24-FB	


**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.

A30: 112 - 143




Key on A30: 1

A30: 52 - 56




A30: 4 - 6




SW

A30: 4 - 6



FN

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 


Inserts sold in quantities of 2

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX





## T-A Drill Inserts



1 Series | HSS | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")



Tube Sheet





### HSS Inserts – Super Cobalt | HSS

Series	Insert				Part No.	
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 Super Cobalt	 HSS
1	19.25	0.7580	–	3.97	<b>151H-.7580-IN</b>	<b>131H-.7580-IN</b>
	19.45	0.7656	49/64	3.97	<b>151H-.765-IN</b>	<b>131H-.765-IN</b>
	19.85	0.7813	25/32	3.97	<b>151H-0025-IN</b>	<b>131H-0025-IN</b>

Inserts sold in quantities of 2

A30: 112 - 143

A30: 52 - 56





Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →




<b>TIN</b> = 1C2YT-XXXX	<b>TAIIN</b> = 1C2YA-XXXX
<b>TICN</b> = 1C2YN-XXXX	<b>AM200<sup>®</sup></b> = 1C2YH-XXXX

**T-A Drill Inserts**




1 Series | HSS | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")



**HSS Inserts – HSS**

Series	Insert				Part No.		
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	 TiN	 TiAlN	 TiCN
1	17.86	0.7031	45/64	3.97	131T-.703	131A-.703	131N-.703
	18.00	0.7087	–	3.97	131T-18	131A-18	131N-18
	18.26	0.7188	23/32	3.97	131T-0023	131A-0023	131N-0023
	18.50	0.7283	–	3.97	131T-18.5	131A-18.5	131N-18.5
	18.65	0.7344	47/64	3.97	131T-.734	131A-.734	131N-.734
	19.00	0.7480	–	3.97	131T-19	131A-19	131N-19
	19.05	0.7500	3/4	3.97	131T-0024	131A-0024	131N-0024
	19.45	0.7656	49/64	3.97	131T-.765	131A-.765	131N-.765
	19.50	0.7677	–	3.97	131T-19.5	131A-19.5	131N-19.5
	19.84	0.7813	25/32	3.97	131T-0025	131A-0025	131N-0025
	20.00	0.7874	–	3.97	131T-20	131A-20	131N-20
	20.24	0.7969	51/64	3.97	131T-.796	131A-.796	131N-.796
	20.34	0.8010	–	3.97	131T-.801	131A-.801	131N-.801
	20.50	0.8071	–	3.97	131T-20.5	131A-20.5	131N-20.5
	20.64	0.8125	13/16	3.97	131T-0026	131A-0026	131N-0026
	21.00	0.8268	–	3.97	131T-21	131A-21	131N-21
21.43	0.8438	27/32	3.97	131T-0027	131A-0027	131N-0027	
21.50	0.8465	–	3.97	131T-21.5	131A-21.5	131N-21.5	
1.5	21.83	0.8594	55/64	3.97	131T-.859	131A-.859	131N-.859
	22.00	0.8661	–	3.97	131T-22	131A-22	131N-22
	22.23	0.8750	7/8	3.97	131T-0028	131A-0028	131N-0028
	22.50	0.8858	–	3.97	131T-22.5	131A-22.5	131N-22.5
	22.62	0.8906	57/64	3.97	131T-.890	131A-.890	131N-.890
	23.00	0.9055	–	3.97	131T-23	131A-23	131N-23
	23.02	0.9063	29/32	3.97	131T-0029	131A-0029	131N-0029
	23.42	0.9219	59/64	3.97	131T-.921	131A-.921	131N-.921
	23.50	0.9252	–	3.97	131T-23.5	131A-23.5	131N-23.5
	23.81	0.9375	15/16	3.97	131T-0030	131A-0030	131N-0030
24.00	0.9449	–	3.97	131T-24	131A-24	131N-24	

**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

Inserts sold in quantities of 2




TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

T-A Drill Inserts



1 Series | Carbide | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")






Standard



Flat Bottom




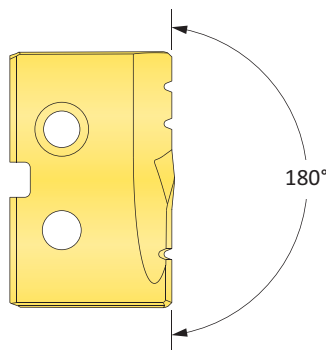


Carbide Inserts – K20 (C2)

Series	Insert				Part No.		Flat Bottom Part No.
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	 TIN	 TiAlN	 TiN
1	17.86	0.7031	45/64	3.97	1C21T-.703	1C21A-.703	1C21T-.703-FB
	18.00	0.7087	-	3.97	1C21T-18	1C21A-18	1C21T-18-FB
	18.26	0.7188	23/32	3.97	1C21T-0023	1C21A-0023	1C21T-0023-FB
	18.50	0.7283	-	3.97	1C21T-18.5	1C21A-18.5	1C21T-18.5-FB
	18.65	0.7344	47/64	3.97	1C21T-.734	1C21A-.734	1C21T-.734-FB
	19.00	0.7480	-	3.97	1C21T-19	1C21A-19	1C21T-19-FB
	19.05	0.7500	3/4	3.97	1C21T-0024	1C21A-0024	1C21T-0024-FB
	19.45	0.7656	49/64	3.97	1C21T-.765	1C21A-.765	1C21T-.765-FB
	19.50	0.7677	-	3.97	1C21T-19.5	1C21A-19.5	1C21T-19.5-FB
	19.84	0.7813	25/32	3.97	1C21T-0025	1C21A-0025	1C21T-0025-FB
	20.00	0.7874	-	3.97	1C21T-20	1C21A-20	1C21T-20-FB
	20.24	0.7969	51/64	3.97	1C21T-.796	1C21A-.796	1C21T-.796-FB
	20.34	0.8010	-	3.97	1C21T-.801	1C21A-.801	1C21T-.801-FB
	20.50	0.8071	-	3.97	1C21T-20.5	1C21A-20.5	1C21T-20.5-FB
	20.64	0.8125	13/16	3.97	1C21T-0026	1C21A-0026	1C21T-0026-FB
	1.5	21.00	0.8268	-	3.97	1C21T-21	1C21A-21
21.43		0.8438	27/32	3.97	1C21T-0027	1C21A-0027	1C21T-0027-FB
21.50		0.8465	-	3.97	1C21T-21.5	1C21A-21.5	1C21T-21.5-FB
21.83		0.8594	55/64	3.97	1C21T-.859	1C21A-.859	1C21T-.859-FB
22.00		0.8661	-	3.97	1C21T-22	1C21A-22	1C21T-22-FB
22.23		0.8750	7/8	3.97	1C21T-0028	1C21A-0028	1C21T-0028-FB
22.50		0.8858	-	3.97	1C21T-22.5	1C21A-22.5	1C21T-22.5-FB
22.62		0.8906	57/64	3.97	1C21T-.890	1C21A-.890	1C21T-.890-FB
23.00		0.9055	-	3.97	1C21T-23	1C21A-23	1C21T-23-FB
23.02		0.9063	29/32	3.97	1C21T-0029	1C21A-0029	1C21T-0029-FB
23.42		0.9219	59/64	3.97	1C21T-.921	1C21A-.921	1C21T-.921-FB
23.50		0.9252	-	3.97	1C21T-23.5	1C21A-23.5	1C21T-23.5-FB
23.81	0.9375	15/16	3.97	1C21T-0030	1C21A-0030	1C21T-0030-FB	
24.00	0.9449	-	3.97	1C21T-24	1C21A-24	1C21T-24-FB	

NOTE: 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.

A DRILLING  
B BORING  
C REAMING  
D BURNISHING  
E THREADING  
X SPECIALS




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply.

TIN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX





Inserts sold in quantities of 2

**T-A Drill Inserts**

1 Series | Carbide | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")



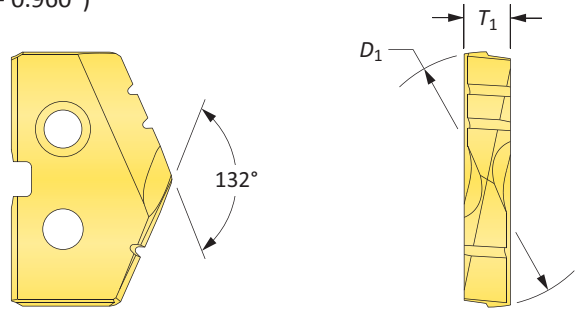


Carbide Inserts – P40 (C5) | K10 (C3) | N2

Series	Insert				C5 Part No.		C3 Part No.	N2 Part No.
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	 TiN	 TiAlN	 TiAlN (Cast Iron)	 Diamond Film*
1	17.86	0.7031	45/64	3.97	1C51T-.703	1C51A-.703	1C31A-.703-CI	1N21D-.703
	18.00	0.7087	–	3.97	1C51T-18	1C51A-18	1C31A-18-CI	1N21D-18
	18.26	0.7188	23/32	3.97	1C51T-0023	1C51A-0023	1C31A-0023-CI	1N21D-0023
	18.50	0.7283	–	3.97	1C51T-18.5	1C51A-18.5	1C31A-18.5-CI	1N21D-18.5
	18.65	0.7344	47/64	3.97	1C51T-.734	1C51A-.734	1C31A-.734-CI	1N21D-.734
	19.00	0.7480	–	3.97	1C51T-19	1C51A-19	1C31A-19-CI	1N21D-19
	19.05	0.7500	3/4	3.97	1C51T-0024	1C51A-0024	1C31A-0024-CI	1N21D-0024
	19.45	0.7656	49/64	3.97	1C51T-.765	1C51A-.765	1C31A-.765-CI	1N21D-.765
	19.50	0.7677	–	3.97	1C51T-19.5	1C51A-19.5	1C31A-19.5-CI	1N21D-19.5
	19.84	0.7813	25/32	3.97	1C51T-0025	1C51A-0025	1C31A-0025-CI	1N21D-0025
	20.00	0.7874	–	3.97	1C51T-20	1C51A-20	1C31A-20-CI	1N21D-20
	20.24	0.7969	51/64	3.97	1C51T-.796	1C51A-.796	1C31A-.796-CI	1N21D-.796
	20.34	0.8010	–	3.97	1C51T-.801	1C51A-.801	1C31A-.801-CI	1N21D-.801
	20.50	0.8071	–	3.97	1C51T-20.5	1C51A-20.5	1C31A-20.5-CI	1N21D-20.5
	20.64	0.8125	13/16	3.97	1C51T-0026	1C51A-0026	1C31A-0026-CI	1N21D-0026
	21.00	0.8268	–	3.97	1C51T-21	1C51A-21	1C31A-21-CI	1N21D-21
21.43	0.8438	27/32	3.97	1C51T-0027	1C51A-0027	1C31A-0027-CI	1N21D-0027	
21.50	0.8465	–	3.97	1C51T-21.5	1C51A-21.5	1C31A-21.5-CI	1N21D-21.5	
1.5	21.83	0.8594	55/64	3.97	1C51T-.859	1C51A-.859	1C31A-.859-CI	1N21D-.859
	22.00	0.8661	–	3.97	1C51T-22	1C51A-22	1C31A-22-CI	1N21D-22
	22.23	0.8750	7/8	3.97	1C51T-0028	1C51A-0028	1C31A-0028-CI	1N21D-0028
	22.50	0.8858	–	3.97	1C51T-22.5	1C51A-22.5	1C31A-22.5-CI	1N21D-22.5
	22.62	0.8906	57/64	3.97	1C51T-.890	1C51A-.890	1C31A-.890-CI	1N21D-.890
	23.00	0.9055	–	3.97	1C51T-23	1C51A-23	1C31A-23-CI	1N21D-23
	23.02	0.9063	29/32	3.97	1C51T-0029	1C51A-0029	1C31A-0029-CI	1N21D-0029
	23.42	0.9219	59/64	3.97	1C51T-.921	1C51A-.921	1C31A-.921-CI	1N21D-.921
	23.50	0.9252	–	3.97	1C51T-23.5	1C51A-23.5	1C31A-23.5-CI	1N21D-23.5
	23.81	0.9375	15/16	3.97	1C51T-0030	1C51A-0030	1C31A-0030-CI	1N21D-0030
24.00	0.9449	–	3.97	1C51T-24	1C51A-24	1C31A-24-CI	1N21D-24	

**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.

\*Diamond Film is only available in standard geometry. For additional geometries, please contact Application Engineering.



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →


Inserts sold in quantities of 2

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX


A DRILLING  
B BORING  
C REAMING  
D BURNISHING  
E THREADING  
X SPECIALS

## T-A Drill Insert Holders

1 Series | Flange Shank | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")

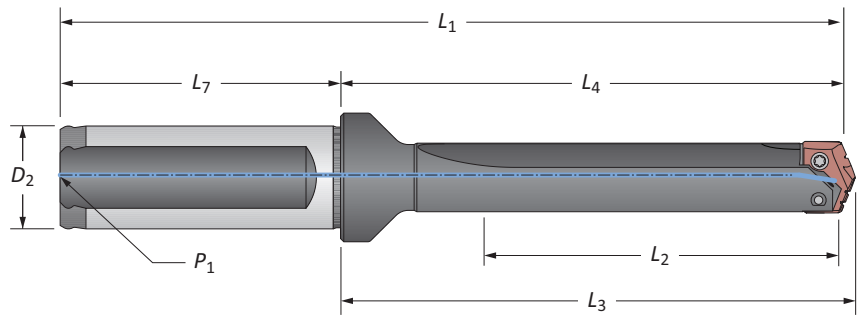

Stub Length

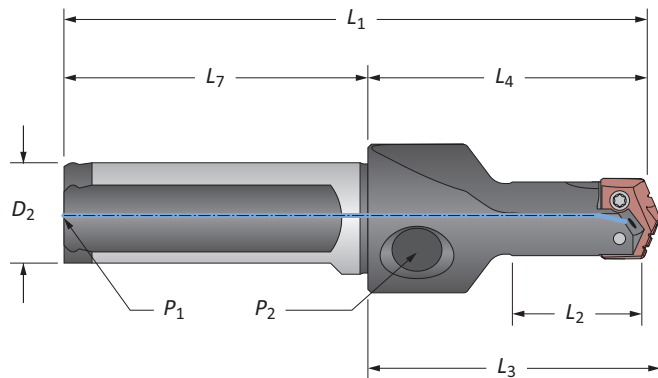

### Straight Flute

Series	Length	Body				Shank			Part No.	
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>		
1	Stub	47.6	75.8	79.4	131.8	25.0	56.0	1/8*	21010S-25FM	
	Short	66.7	107.2	110.7	163.2	25.0	56.0	1/8*	22010S-25FM	
	Intermediate	118.0	154.8	158.4	210.8	25.0	56.0	1/8*	23010S-25FM	
	Intermediate	118.0	154.8	158.4	210.8	25.0	56.0	1/8*	23015S-25FM	
	Standard	168.0	205.6	209.2	261.6	25.0	56.0	1/8*	24010S-25FM	
	Standard	168.0	205.6	209.2	261.6	25.0	56.0	1/8*	24015S-25FM	
	XL	457.0	494.5	498.1	550.5	25.0	56.0	1/8*	27010S-25FM	
1.5	3XL	569.0	602.5	606.1	658.5	25.0	56.0	1/8*	29010S-25FM	
	Stub	57.2	88.5	92.1	144.5	25.0	56.0	1/8*	21015S-25FM	
1	Short	66.7	107.2	110.7	163.2	25.0	56.0	1/8*	22015S-25FM	
	Stub	1-7/8	2-63/64	3-1/8	5-17/64	1	2-9/32	1/8	21010S-100F	
	Short	2-5/8	4-7/32	4-23/64	6-1/2	1	2-9/32	1/8	22010S-100F	
	Standard	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8	23010S-100F	
	Standard	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8	24010S-100F	
	Extended	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8	25010S-100F	
	1.5	Stub	2-1/4	3-31/64	3-5/8	5-49/64	1	2-9/32	1/8	21015S-100F
		Short	2-5/8	4-7/32	4-23/64	6-1/2	1	2-9/32	1/8	22015S-100F
		Intermediate	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8	23015S-100F
		Standard	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8	24015S-100F
Extended		10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8	25015S-100F	

\*Metric thread to BSP and ISO 7-1


**NOTE:** Stub length holders have a 1/8" side pipe tap (P<sub>2</sub>)

**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.

### Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
1	7375-IP9-1	7375N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)
1.5	739-IP9-1	739N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



Ⓜ = Metric (mm)


Ⓢ = Imperial (in)

Screws sold in quantities of 10

**⚠ WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

1 Series | Flange Shank | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")

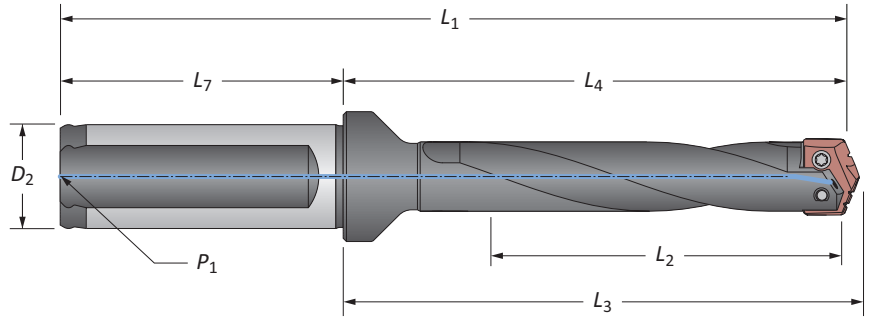

### Helical Flute

Series	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
1	Intermediate	117.5	154.8	158.4	210.8	25.0	56.0	1/8*	23010H-25FM
	Standard	168.3	205.6	209.2	261.6	25.0	56.0	1/8*	24010H-25FM
	Standard Plus	219.0	256.3	259.9	312.3	25.0	56.0	1/8*	24510H-25FM
	Extended	269.9	307.2	310.8	363.2	25.0	56.0	1/8*	25010H-25FM
	Long	365.0	402.3	405.9	458.3	25.0	56.0	1/8*	26010H-25FM
1.5	Intermediate	117.5	154.8	158.4	210.8	25.0	56.0	1/8*	23015H-25FM
	Standard	168.3	205.6	209.2	261.6	25.0	56.0	1/8*	24015H-25FM
	Extended	269.9	307.2	310.8	363.2	25.0	56.0	1/8*	25015H-25FM
1	Intermediate	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8	23010H-100F
	Standard	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8	24010H-100F
	Standard Plus	8-5/8	10-3/32	10-15/64	12-33/64	1	2-9/32	1/8	24510H-100F
	Extended	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8	25010H-100F
	Long	14-3/8	15-27/32	15-63/64	18-17/64	1	2-9/32	1/8	26010H-100F
1.5	Intermediate	4-5/8	6-3/32	6-15/64	8-3/8	1	2-9/32	1/8	23015H-100F
	Standard	6-5/8	8-3/32	8-15/64	10-3/8	1	2-9/32	1/8	24015H-100F
	Extended	10-5/8	12-3/32	12-15/64	14-3/8	1	2-9/32	1/8	25015H-100F

\*Metric thread to BSP and ISO 7-1


**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.

### Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
1	7375-IP9-1	7375N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)
1.5	739-IP9-1	739N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 44 - 51



**m** = Metric (mm)


**i** = Imperial (in)

Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

1 Series | Taper Shank | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")

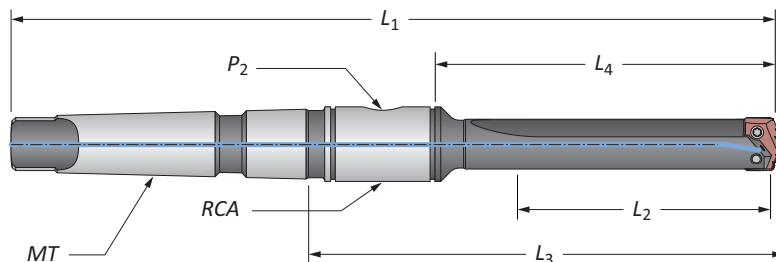

### Straight Flute

Series	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA	
<b>m</b> 1	Short	69.8	98.4	142.5	232.5	#3**	1/8*	2T-3SRM	22010S-003M
1.5	Short	69.8	98.4	142.5	232.5	#3**	1/8*	2T-3SRM	22015S-003M
<b>i</b> 1	Short	2-3/4	3-7/8	5-39/64	9-5/32	#3	1/8	2T-3SR	22010S-003I
	Short	2-3/4	3-7/8	5-39/64	10-5/32	#4	1/8	2T-3SR	22010S-004I
	Intermediate	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	2T-3SR	23010S-003I
	Standard	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	2T-3SR	24010S-003I
	Standard	6-3/4	7-7/8	9-39/64	14-5/32	#4	1/8	2T-3SR	24010S-004I
1.5	Extended	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	2T-3SR	<b>25010S-003I</b>
	Short	2-3/4	3-7/8	5-39/64	9-5/32	#3	1/8	2T-3SR	22015S-003I
	Short	2-3/4	3-7/8	5-39/64	10-5/32	#4	1/8	2T-3SR	22015S-004I
	Intermediate	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	2T-3SR	23015S-003I
	Standard	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	2T-3SR	24015S-003I
1.5	Standard	6-3/4	7-7/8	9-39/64	14-5/32	#4	1/8	2T-3SR	24015S-004I
	Extended	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	2T-3SR	<b>25015S-003I</b>

\*Metric thread to BSP and ISO 7-1


\*\*Per ISO 296 type BEK

**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts **ONLY** fit into 1 series holders. See page A30: 7 for visual.

### Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
1	7375-IP9-1	7375N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)
1.5	739-IP9-1	739N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



**m** = Metric (mm)

**i** = Imperial (in)


Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.



## T-A Drill Insert Holders

1 Series | Taper Shank | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")

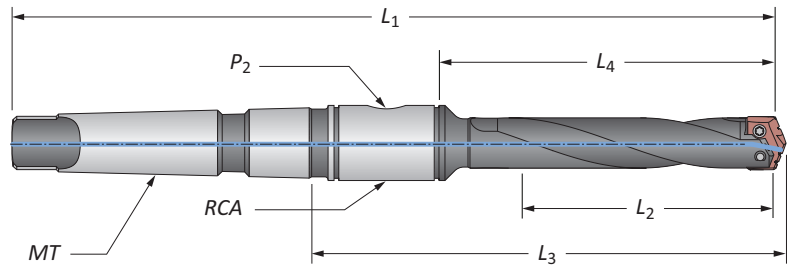

### Helical Flute

Series	Length	Body				Shank			Part No.	
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA		
m	1	Intermediate	120.7	149.2	193.3	283.3	#3**	1/8*	2T-3SRM	23010H-003M
		Standard	171.5	200.0	244.1	334.2	#3**	1/8*	2T-3SRM	24010H-003M
		Extended	273.1	301.6	345.7	435.8	#3**	1/8*	2T-3SRM	25010H-003M
m	1.5	Intermediate	120.7	149.2	193.3	283.3	#3**	1/8*	2T-3SRM	23015H-003M
		Standard	171.5	200.0	244.1	334.2	#3**	1/8*	2T-3SRM	24015H-003M
		Extended	273.1	301.6	345.7	435.8	#3**	1/8*	2T-3SRM	25015H-003M
i	1	Intermediate	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	2T-3SR	23010H-003I
		Standard	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	2T-3SR	24010H-003I
		Standard	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	2T-3SR	24010H-004I
		Extended	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	2T-3SR	25010H-003I
	1.5	Intermediate	4-3/4	5-7/8	7-39/64	11-5/32	#3	1/8	2T-3SR	23015H-003I
		Standard	6-3/4	7-7/8	9-39/64	13-5/32	#3	1/8	2T-3SR	24015H-003I
		Standard	6-3/4	7-7/8	9-43/64	14-5/32	#4	1/8	2T-3SR	24015H-004I
	Extended	10-3/4	11-7/8	13-39/64	17-5/32	#3	1/8	2T-3SR	25015H-003I	

\*Metric thread to BSP and ISO 7-1


\*\*Per ISO 296 type BEK

**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.

### Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
1	7375-IP9-1	7375N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)
1.5	739-IP9-1	739N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



m = Metric (mm)


i = Imperial (in)

Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

1 Series | Straight Shank | Diameter Range: 17.53 mm - 24.38 mm (0.690" - 0.960")

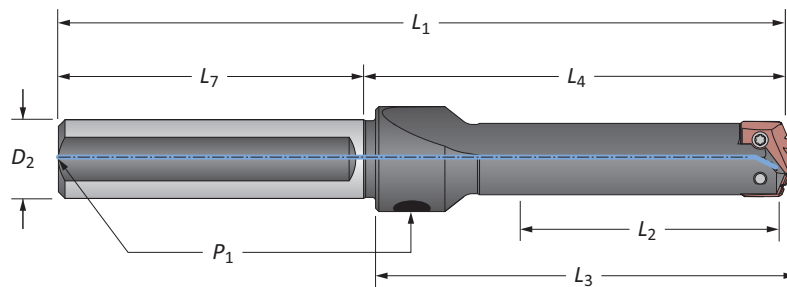

### Straight Flute


Series	Length	Body				Shank			Part No.
		$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
1	Short	2-5/8	3-7/8	4-1/64	6-7/8	3/4	3	1/8	22010S-075L
	Short	2-5/8	3-7/8	4-1/64	6-7/8	1	3	1/8	22010S-100L
	Intermediate	4-5/8	5-7/8	6-1/64	8-7/8	1	3	1/8	23010S-100L
	Standard	6-5/8	7-7/8	8-1/64	10-7/8	3/4	3	1/8	24010S-075L
	Standard	6-5/8	7-7/8	8-1/64	10-7/8	1	3	1/8	24010S-100L
	Extended	10-5/8	11-7/8	12-1/64	14-7/8	1	3	1/8	⚠ 25010S-100L
	XL	18	19-1/4	19-25/64	22-1/4	1	3	1/8	⚠ 27010S-100L
1.5	3XL	22-1/4	23-1/2	23-41/64	26-1/2	1	3	1/8	⚠ 29010S-100L
	Short	2-5/8	3-7/8	4-1/64	6-7/8	3/4	3	1/8*	22015S-075L
	Short	2-5/8	3-7/8	4-1/64	6-7/8	1	3	1/8*	22015S-100L
	Intermediate	4-5/8	5-7/8	6-1/64	8-7/8	1	3	1/8*	23015S-100L
	Standard	6-5/8	7-7/8	8-1/64	10-7/8	3/4	3	1/8*	24015S-075L
	Standard	6-5/8	7-7/8	8-1/64	10-7/8	1	3	1/8*	24015S-100L
	Extended	10-5/8	11-7/8	12-1/64	14-7/8	1	3	1/8*	⚠ 25015S-100L

**NOTE:** 1.5 series inserts fit into both 1 and 1.5 series holders. However, 1 series inserts ONLY fit into 1 series holders. See page A30: 7 for visual.

### Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
1	7375-IP9-1	7375N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)
1.5	739-IP9-1	739N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



$\text{m}$  = Metric (mm)

$\text{i}$  = Imperial (in)


Screws sold in quantities of 10

**⚠ WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.



T-A Drill Accessories

1 Series | Chamfer Rings | Rotary Coolant Adapters | Torx® Plus Screws

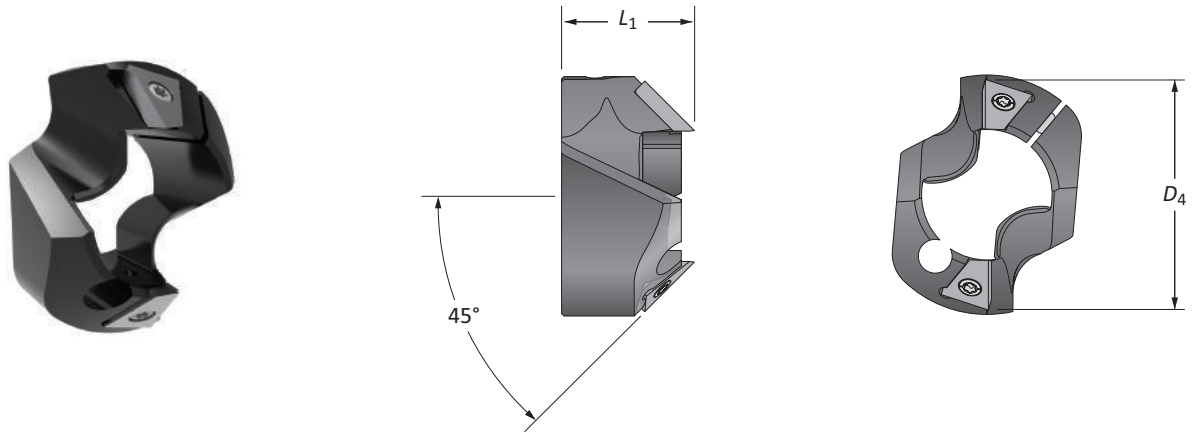


T-ACR 45 Chamfer Ring

Holder Series	D <sub>1</sub> Range	Chamfer Ring		Part No.	Insert Part No.	Insert Screw	Insert Driver	Clamping Screw	Insert Driver
		D <sub>4</sub>	L <sub>1</sub>						
1	0.6900 - 0.9600	1-3/64	51/64	T-ACR-45-1	T-ACRI-45-B-C5A	7255-IP8-1	8IP-8	7495-IP15-1	8IP-15
1.5	0.8540 - 0.9600	1-1/8	57/64	T-ACR-45-1.5	T-ACRI-45-B-C5A	7255-IP8-1	8IP-8	7495-IP15-1	8IP-15

Rotary Coolant Adapter (RCA) and Accessories

ID	OD	L <sub>1</sub>	Driving Rod Thread	P <sub>1</sub>	Part No.	RCA O-Rings	
						Kit Part No.**	Replacements
25.40	53.97	28.57	M8 x 1.25	1/8*	2T-3SRM	2T1-3SR	2T1-3OR-10
1	2-1/8	1-1/8	5/16-18	1/8	2T-3SR	2T1-3SR	2T1-3OR-10

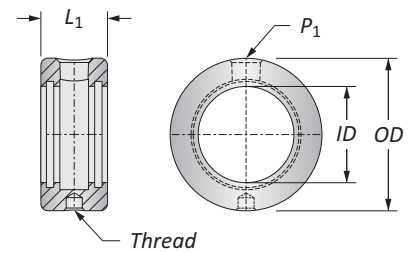

\*Thread to BSP and ISO 7-1


\*\*RCA Repair Kit includes (2) O-rings, (2) snap rings, and (2) thrust washers

Refer to page A30: 110 for proper RCA assembly and safety information

Connection Accessories

Series	Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
1	7375-IP9-1	7375N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)
1.5	739-IP9-1	739N-IP9-1	8IP-9	8IP-9TL	8IP-9B	305 N-cm (27.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength




= Metric (mm)  
 = Imperial (in)

Chamfer Ring Inserts sold separately  
 Screws sold in packs of 10  
 O-rings sold in packs of 10




**WARNING** RCA rotation during drilling can cause hose and/or hose fitting failure, machinery damage, and/or serious injury. To prevent, use RCA and positive stop studs when drilling. Factory technical assistance is also available for your specific applications.

## GEN2 T-A Drill Inserts


2 Series | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")

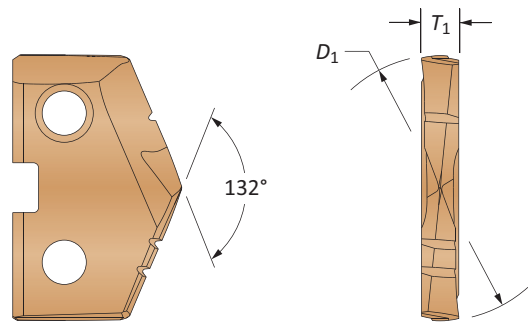

HSS Inserts – Super Cobalt • Carbide Inserts – K20 (C2) | K35 (C1)

Series	Insert				HSS Part No.	Carbide Part No.	
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200® Super Cobalt	 AM300® K20 (C2)	 AM300® K35 (C1)
2	24.50	0.9646	–	4.76	452H-24.5	4C22P-24.5	4C12P-24.5
	24.61	0.9688	31/32	4.76	452H-0031	4C22P-0031	4C12P-0031
	24.79	0.9760	–	4.76	452H-.976	4C22P-.976	4C12P-.976
	25.00	0.9843	63/64	4.76	452H-25	4C22P-25	4C12P-25
	25.40	1.0000	1	4.76	452H-0100	4C22P-0100	4C12P-0100
	25.50	1.0039	–	4.76	452H-25.5	4C22P-25.5	4C12P-25.5
	25.80	1.0156	1-1/64	4.76	452H-1.015	4C22P-1.015	4C12P-1.015
	26.00	1.0236	–	4.76	452H-26	4C22P-26	4C12P-26
	26.19	1.0313	1-1/32	4.76	452H-0101	4C22P-0101	4C12P-0101
	26.50	1.0433	–	4.76	452H-26.5	4C22P-26.5	4C12P-26.5
	26.59	1.0469	1-3/64	4.76	452H-1.046	4C22P-1.046	4C12P-1.046
	26.99	1.0625	1-1/16	4.76	452H-0102	4C22P-0102	4C12P-0102
	27.00	1.0630	–	4.76	452H-27	4C22P-27	4C12P-27
	27.50	1.0827	–	4.76	452H-27.5	4C22P-27.5	4C12P-27.5
	27.78	1.0938	1-3/32	4.76	452H-0103	4C22P-0103	4C12P-0103
	28.00	1.1024	–	4.76	452H-28	4C22P-28	4C12P-28
	28.18	1.1094	1-7/64	4.76	452H-1.109	4C22P-1.109	4C12P-1.109
	28.50	1.1220	–	4.76	452H-28.5	4C22P-28.5	4C12P-28.5
	28.58	1.1250	1-1/8	4.76	452H-0104	4C22P-0104	4C12P-0104
	29.00	1.1417	–	4.76	452H-29	4C22P-29	4C12P-29
29.37	1.1563	1-5/32	4.76	452H-0105	4C22P-0105	4C12P-0105	
29.50	1.1614	–	4.76	452H-29.5	4C22P-29.5	4C12P-29.5	
30.00	1.1811	–	4.76	452H-30	4C22P-30	4C12P-30	
2.5	30.16	1.1875	1-3/16	4.76	452H-0106	4C22P-0106	4C12P-0106
	30.50	1.2008	–	4.76	452H-30.5	4C22P-30.5	4C12P-30.5
	30.96	1.2188	1-7/32	4.76	452H-0107	4C22P-0107	4C12P-0107
	31.00	1.2205	–	4.76	452H-31	4C22P-31	4C12P-31
	31.14	1.2260	–	4.76	452H-1.226	4C22P-1.226	4C12P-1.226
	31.26	1.2310	–	4.76	452H-1.231	4C22P-1.231	4C12P-1.231
	31.34	1.2340	–	4.76	452H-1.234	4C22P-1.234	4C12P-1.234
	31.50	1.2402	–	4.76	452H-31.5	4C22P-31.5	4C12P-31.5
	31.75	1.2500	1-1/4	4.76	452H-0108	4C22P-0108	4C12P-0108
	32.00	1.2598	–	4.76	452H-32	4C22P-32	4C12P-32
	32.50	1.2795	–	4.76	452H-32.5	4C22P-32.5	4C12P-32.5
	32.54	1.2813	1-9/32	4.76	452H-0109	4C22P-0109	4C12P-0109
	33.00	1.2992	–	4.76	452H-33	4C22P-33	4C12P-33
	33.34	1.3125	1-5/16	4.76	452H-0110	4C22P-0110	4C12P-0110
	33.50	1.3189	–	4.76	452H-33.5	4C22P-33.5	4C12P-33.5
	34.00	1.3386	–	4.76	452H-34	4C22P-34	4C12P-34
	34.13	1.3438	1-11/32	4.76	452H-0111	4C22P-0111	4C12P-0111
	34.50	1.3582	–	4.76	452H-34.5	4C22P-34.5	4C12P-34.5
	34.93	1.3750	1-3/8	4.76	452H-0112	4C22P-0112	4C12P-0112
	35.00	1.3780	–	4.76	452H-35	4C22P-35	4C12P-35

**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.

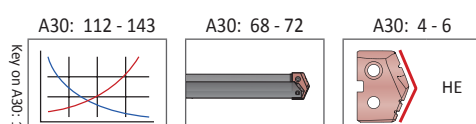

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →


TIN = 1C2YT-XXXX	TIAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

Inserts sold in quantities of 2






T-A Drill Inserts

2 Series | HSS | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")

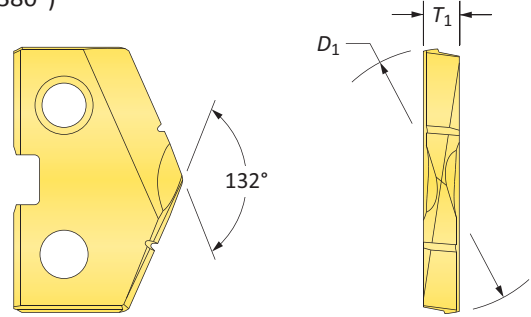

HSS Inserts – Premium Cobalt

Series	Insert				Part No.		
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	 TiN	 TiAlN	 TiCN
2	24.50	0.9646	–	4.76	182T-24.5	182A-24.5	182N-24.5
	24.61	0.9688	31/32	4.76	182T-0031	182A-0031	182N-0031
	24.79	0.9760	–	4.76	182T-.976	182A-.976	182N-.976
	25.00	0.9843	63/64	4.76	182T-25	182A-25	182N-25
	25.40	1.0000	1	4.76	182T-0100	182A-0100	182N-0100
	25.50	1.0039	–	4.76	182T-25.5	182A-25.5	182N-25.5
	25.80	1.0156	1-1/64	4.76	182T-1.015	182A-1.015	182N-1.015
	26.00	1.0236	–	4.76	182T-26	182A-26	182N-26
	26.19	1.0313	1-1/32	4.76	182T-0101	182A-0101	182N-0101
	26.50	1.0433	–	4.76	182T-26.5	182A-26.5	182N-26.5
	26.59	1.0469	1-3/64	4.76	182T-1.046	182A-1.046	182N-1.046
	26.99	1.0625	1-1/16	4.76	182T-0102	182A-0102	182N-0102
	27.00	1.0630	–	4.76	182T-27	182A-27	182N-27
	27.50	1.0827	–	4.76	182T-27.5	182A-27.5	182N-27.5
	27.78	1.0938	1-3/32	4.76	182T-0103	182A-0103	182N-0103
	28.00	1.1024	–	4.76	182T-28	182A-28	182N-28
	28.18	1.1094	1-7/64	4.76	182T-1.109	182A-1.109	182N-1.109
	28.50	1.1220	–	4.76	182T-28.5	182A-28.5	182N-28.5
	28.58	1.1250	1-1/8	4.76	182T-0104	182A-0104	182N-0104
	29.00	1.1417	–	4.76	182T-29	182A-29	182N-29
29.37	1.1563	1-5/32	4.76	182T-0105	182A-0105	182N-0105	
29.50	1.1614	–	4.76	182T-29.5	182A-29.5	182N-29.5	
30.00	1.1811	–	4.76	182T-30	182A-30	182N-30	
2.5	30.16	1.1875	1-4/76	4.76	182T-0106	182A-0106	182N-0106
	30.50	1.2008	–	4.76	182T-30.5	182A-30.5	182N-30.5
	30.96	1.2188	1-7/32	4.76	182T-0107	182A-0107	182N-0107
	31.00	1.2205	–	4.76	182T-31	182A-31	182N-31
	31.14	1.2260	–	4.76	182T-1.226	182A-1.226	182N-1.226
	31.26	1.2310	–	4.76	182T-1.231	182A-1.231	182N-1.231
	31.34	1.2340	–	4.76	182T-1.234	182A-1.234	182N-1.234
	31.50	1.2402	–	4.76	182T-31.5	182A-31.5	182N-31.5
	31.75	1.2500	1-1/4	4.76	182T-0108	182A-0108	182N-0108
	32.00	1.2598	–	4.76	182T-32	182A-32	182N-32
	32.50	1.2795	–	4.76	182T-32.5	182A-32.5	182N-32.5
	32.54	1.2813	1-9/32	4.76	182T-0109	182A-0109	182N-0109
	33.00	1.2992	–	4.76	182T-33	182A-33	182N-33
	33.34	1.3125	1-5/16	4.76	182T-0110	182A-0110	182N-0110
	33.50	1.3189	–	4.76	182T-33.5	182A-33.5	182N-33.5
	34.00	1.3386	–	4.76	182T-34	182A-34	182N-34
	34.13	1.3438	1-11/32	4.76	182T-0111	182A-0111	182N-0111
	34.50	1.3582	–	4.76	182T-34.5	182A-34.5	182N-34.5
	34.93	1.3750	1-3/8	4.76	182T-0112	182A-0112	182N-0112
	35.00	1.3780	–	4.76	182T-35	182A-35	182N-35

NOTE: 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.

A30: 112 - 143

Key on A30: 1

A30: 68 - 72

A30: 4 - 6

HI, HR, CR, TC, SK, NP, IN, RN, CN, AN, BR, CI, CP, NC, WC

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →



Inserts sold in quantities of 2

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX




A DRILLING  
B BORING  
C REAMING  
D BURNISHING  
E THREADING  
X SPECIALS

## T-A Drill Inserts

2 Series | HSS | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")

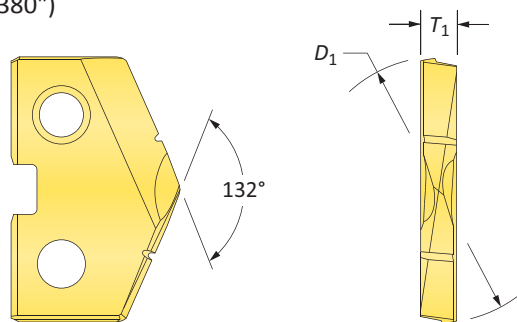


### HSS Inserts – Super Cobalt


Series	Insert				Part No.		
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN
2	24.50	0.9646	–	4.76	152T-24.5	152A-24.5	152N-24.5
	24.61	0.9688	31/32	4.76	152T-0031	152A-0031	152N-0031
	24.79	0.9760	–	4.76	152T-.976	152A-.976	152N-.976
	25.00	0.9843	63/64	4.76	152T-25	152A-25	152N-25
	25.40	1.0000	1	4.76	152T-0100	152A-0100	152N-0100
	25.50	1.0039	–	4.76	152T-25.5	152A-25.5	152N-25.5
	25.80	1.0156	1-1/64	4.76	152T-1.015	152A-1.015	152N-1.015
	26.00	1.0236	–	4.76	152T-26	152A-26	152N-26
	26.19	1.0313	1-1/32	4.76	152T-0101	152A-0101	152N-0101
	26.50	1.0433	–	4.76	152T-26.5	152A-26.5	152N-26.5
	26.59	1.0469	1-3/64	4.76	152T-1.046	152A-1.046	152N-1.046
	26.99	1.0625	1-1/16	4.76	152T-0102	152A-0102	152N-0102
	27.00	1.0630	–	4.76	152T-27	152A-27	152N-27
	27.50	1.0827	–	4.76	152T-27.5	152A-27.5	152N-27.5
	27.78	1.0938	1-3/32	4.76	152T-0103	152A-0103	152N-0103
	28.00	1.1024	–	4.76	152T-28	152A-28	152N-28
	28.18	1.1094	1-7/64	4.76	152T-1.109	152A-1.109	152N-1.109
	28.50	1.1220	–	4.76	152T-28.5	152A-28.5	152N-28.5
	28.58	1.1250	1-1/8	4.76	152T-0104	152A-0104	152N-0104
	29.00	1.1417	–	4.76	152T-29	152A-29	152N-29
29.37	1.1563	1-5/32	4.76	152T-0105	152A-0105	152N-0105	
29.50	1.1614	–	4.76	152T-29.5	152A-29.5	152N-29.5	
30.00	1.1811	–	4.76	152T-30	152A-30	152N-30	
2.5	30.16	1.1875	1-3/16	4.76	152T-0106	152A-0106	152N-0106
	30.50	1.2008	–	4.76	152T-30.5	152A-30.5	152N-30.5
	30.96	1.2188	1-7/32	4.76	152T-0107	152A-0107	152N-0107
	31.00	1.2205	–	4.76	152T-31	152A-31	152N-31
	31.14	1.2260	–	4.76	152T-1.226	152A-1.226	152N-1.226
	31.26	1.2310	–	4.76	152T-1.231	152A-1.231	152N-1.231
	31.34	1.2340	–	4.76	152T-1.234	152A-1.234	152N-1.234
	31.50	1.2402	–	4.76	152T-31.5	152A-31.5	152N-31.5
	31.75	1.2500	1-1/4	4.76	152T-0108	152A-0108	152N-0108
	32.00	1.2598	–	4.76	152T-32	152A-32	152N-32
	32.50	1.2795	–	4.76	152T-32.5	152A-32.5	152N-32.5
	32.54	1.2813	1-9/32	4.76	152T-0109	152A-0109	152N-0109
	33.00	1.2992	–	4.76	152T-33	152A-33	152N-33
	33.34	1.3125	1-5/16	4.76	152T-0110	152A-0110	152N-0110
	33.50	1.3189	–	4.76	152T-33.5	152A-33.5	152N-33.5
	34.00	1.3386	–	4.76	152T-34	152A-34	152N-34
	34.13	1.3438	1-11/32	4.76	152T-0111	152A-0111	152N-0111
	34.50	1.3582	–	4.76	152T-34.5	152A-34.5	152N-34.5
	34.93	1.3750	1-3/8	4.76	152T-0112	152A-0112	152N-0112
	35.00	1.3780	–	4.76	152T-35	152A-35	152N-35

**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.


A30: 112 - 143



A30: 68 - 72



A30: 4 - 6



HI, HR, CR, TC, SK,  
NP, IN, RN, CN, AN,  
BR, CI, CP, NC, WC


Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

Inserts sold in quantities of 2


TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

**T-A Drill Inserts**




2 Series | HSS | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")

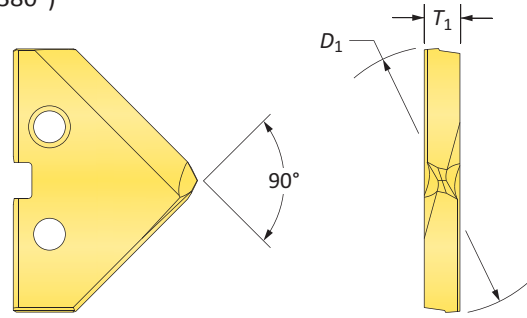


90° Spot & Chamfer



**HSS Inserts – Super Cobalt**

Series	Insert				90° Spot & Chamfer Part No.		
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	 TiN	 TiAlN	 TiCN
2	24.50	0.9646	–	4.76	152T-24.5-SP	152A-24.5-SP	152N-24.5-SP
	24.61	0.9688	31/32	4.76	152T-0031-SP	152A-0031-SP	152N-0031-SP
	24.79	0.9760	–	4.76	152T-.976-SP	152A-.976-SP	152N-.976-SP
	25.00	0.9843	63/64	4.76	152T-25-SP	152A-25-SP	152N-25-SP
	25.40	1.0000	1	4.76	152T-0100-SP	152A-0100-SP	152N-0100-SP
	25.50	1.0039	–	4.76	152T-25.5-SP	152A-25.5-SP	152N-25.5-SP
	25.80	1.0156	1-1/64	4.76	152T-1.015-SP	152A-1.015-SP	152N-1.015-SP
	26.00	1.0236	–	4.76	152T-26-SP	152A-26-SP	152N-26-SP
	26.19	1.0313	1-1/32	4.76	152T-0101-SP	152A-0101-SP	152N-0101-SP
	26.50	1.0433	–	4.76	152T-26.5-SP	152A-26.5-SP	152N-26.5-SP
	26.59	1.0469	1-3/64	4.76	152T-1.046-SP	152A-1.046-SP	152N-1.046-SP
	26.99	1.0625	1-1/16	4.76	152T-0102-SP	152A-0102-SP	152N-0102-SP
	27.00	1.0630	–	4.76	152T-27-SP	152A-27-SP	152N-27-SP
	27.50	1.0827	–	4.76	152T-27.5-SP	152A-27.5-SP	152N-27.5-SP
	27.78	1.0938	1-3/32	4.76	152T-0103-SP	152A-0103-SP	152N-0103-SP
	28.00	1.1024	–	4.76	152T-28-SP	152A-28-SP	152N-28-SP
	28.18	1.1094	1-7/64	4.76	152T-1.109-SP	152A-1.109-SP	152N-1.109-SP
	28.50	1.1220	–	4.76	152T-28.5-SP	152A-28.5-SP	152N-28.5-SP
	28.58	1.1250	1-1/8	4.76	152T-0104-SP	152A-0104-SP	152N-0104-SP
	29.00	1.1417	–	4.76	152T-29-SP	152A-29-SP	152N-29-SP
29.37	1.1563	1-5/32	4.76	152T-0105-SP	152A-0105-SP	152N-0105-SP	
29.50	1.1614	–	4.76	152T-29.5-SP	152A-29.5-SP	152N-29.5-SP	
30.00	1.1811	–	4.76	152T-30-SP	152A-30-SP	152N-30-SP	
2.5	30.16	1.1875	1-3/16	4.76	152T-0106-SP	152A-0106-SP	152N-0106-SP
	30.50	1.2008	–	4.76	152T-30.5-SP	152A-30.5-SP	152N-30.5-SP
	30.96	1.2188	1-7/32	4.76	152T-0107-SP	152A-0107-SP	152N-0107-SP
	31.00	1.2205	–	4.76	152T-31-SP	152A-31-SP	152N-31-SP
	31.14	1.2260	–	4.76	152T-1.226-SP	152A-1.226-SP	152N-1.226-SP
	31.26	1.2310	–	4.76	152T-1.231-SP	152A-1.231-SP	152N-1.231-SP
	31.34	1.2340	–	4.76	152T-1.234-SP	152A-1.234-SP	152N-1.234-SP
	31.50	1.2402	–	4.76	152T-31.5-SP	152A-31.5-SP	152N-31.5-SP
	31.75	1.2500	1-1/4	4.76	152T-0108-SP	152A-0108-SP	152N-0108-SP
	32.00	1.2598	–	4.76	152T-32-SP	152A-32-SP	152N-32-SP
	32.50	1.2795	–	4.76	152T-32.5-SP	152A-32.5-SP	152N-32.5-SP
	32.54	1.2813	1-9/32	4.76	152T-0109-SP	152A-0109-SP	152N-0109-SP
	33.00	1.2992	–	4.76	152T-33-SP	152A-33-SP	152N-33-SP
	33.34	1.3125	1-5/16	4.76	152T-0110-SP	152A-0110-SP	152N-0110-SP
	33.50	1.3189	–	4.76	152T-33.5-SP	152A-33.5-SP	152N-33.5-SP
	34.00	1.3386	–	4.76	152T-34-SP	152A-34-SP	152N-34-SP
	34.13	1.3438	1-11/32	4.76	152T-0111-SP	152A-0111-SP	152N-0111-SP
	34.50	1.3582	–	4.76	152T-34.5-SP	152A-34.5-SP	152N-34.5-SP
	34.93	1.3750	1-3/8	4.76	152T-0112-SP	152A-0112-SP	152N-0112-SP
	35.00	1.3780	–	4.76	152T-35-SP	152A-35-SP	152N-35-SP

**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.

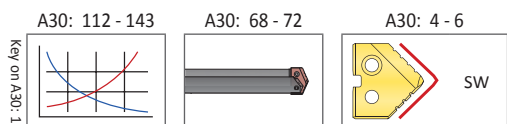

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

Inserts sold in quantities of 2

A  
DRILLING  
B  
BORING  
C  
REAMING  
D  
BURNISHING  
E  
THREADING  
X  
SPECIALS



2


 DRILLING | T-A® Replaceable Insert Drilling System

## T-A Drill Inserts

2 Series | HSS | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")

Flat Bottom

HSS Inserts – Super Cobalt

Series	Insert				Flat Bottom Part No.
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	TiN 
2	24.50	0.9646	–	4.76	152T-24.5-FB
	24.61	0.9688	31/32	4.76	152T-0031-FB
	24.79	0.9760	–	4.76	152T-976-FB
	25.00	0.9843	63/64	4.76	152T-25-FB
	25.40	1.0000	1	4.76	152T-0100-FB
	25.50	1.0039	–	4.76	152T-25.5-FB
	25.80	1.0156	1-1/64	4.76	152T-1.015-FB
	26.00	1.0236	–	4.76	152T-26-FB
	26.19	1.0313	1-1/32	4.76	152T-0101-FB
	26.50	1.0433	–	4.76	152T-26.5-FB
	26.59	1.0469	1-3/64	4.76	152T-1.046-FB
	26.99	1.0625	1-1/16	4.76	152T-0102-FB
	27.00	1.0630	–	4.76	152T-27-FB
	27.50	1.0827	–	4.76	152T-27.5-FB
	27.78	1.0938	1-3/32	4.76	152T-0103-FB
	28.00	1.1024	–	4.76	152T-28-FB
	28.18	1.1094	1-7/64	4.76	152T-1.109-FB
	28.50	1.1220	–	4.76	152T-28.5-FB
	28.58	1.1250	1-1/8	4.76	152T-0104-FB
	29.00	1.1417	–	4.76	152T-29-FB
29.37	1.1563	1-5/32	4.76	152T-0105-FB	
29.50	1.1614	–	4.76	152T-29.5-FB	
30.00	1.1811	–	4.76	152T-30-FB	
2.5	30.16	1.1875	1-3/16	4.76	152T-0106-FB
	30.50	1.2008	–	4.76	152T-30.5-FB
	30.96	1.2188	1-7/32	4.76	152T-0107-FB
	31.00	1.2205	–	4.76	152T-31-FB
	31.14	1.2260	–	4.76	152T-1.226-FB
	31.26	1.2310	–	4.76	152T-1.231-FB
	31.34	1.2340	–	4.76	152T-1.234-FB
	31.50	1.2402	–	4.76	152T-31.5-FB
	31.75	1.2500	1-1/4	4.76	152T-0108-FB
	32.00	1.2598	–	4.76	152T-32-FB
	32.50	1.2795	–	4.76	152T-32.5-FB
	32.54	1.2813	1-9/32	4.76	152T-0109-FB
	33.00	1.2992	–	4.76	152T-33-FB
	33.34	1.3125	1-5/16	4.76	152T-0110-FB
	33.50	1.3189	–	4.76	152T-33.5-FB
	34.00	1.3386	–	4.76	152T-34-FB
	34.13	1.3438	1-11/32	4.76	152T-0111-FB
	34.50	1.3582	–	4.76	152T-34.5-FB
	34.93	1.3750	1-3/8	4.76	152T-0112-FB
	35.00	1.3780	–	4.76	152T-35-FB

**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.

Inserts sold in quantities of 2

 A30: 112 - 143  

 Key on A30: 1

 A30: 68 - 72  

 A30: 4 - 6  

 FN

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply.

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

A30: 62

[www.alliedmachine.com](http://www.alliedmachine.com) | +44 (0) 1384 400 900 | [enquiries.eu@alliedmachine.com](mailto:enquiries.eu@alliedmachine.com)

A DRILLING

B BORING

C REAMING


D BURNISHING

E THREADING


X SPECIALS

### T-A Drill Inserts



2 Series | HSS | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")



Tube Sheet

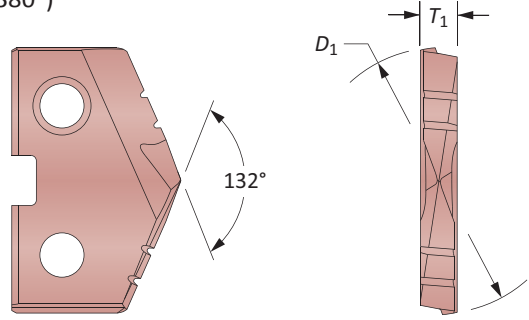

HSS Inserts – Super Cobalt | HSS

Series	$D_1$ mm	$D_1$ inch	Insert		Part No.	
			Fractional Equivalent	$T_1$	 Super Cobalt	 HSS
2	25.60	1.0080	–	4.76	<b>152H-1.0080-IN</b>	<b>132H-1.0080-IN</b>
	25.80	1.0156	1-1/64	4.76	<b>152H-1.015-IN</b>	<b>132H-1.015-IN</b>
	26.19	1.0313	1-1/32	4.76	<b>152H-0101-IN</b>	<b>132H-0101-IN</b>

A

DRILLING

B

BORING

C

REAMING

D


BURNISHING

F


THREADING

X

SPECIALS





Inserts sold in quantities of 2

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 




<b>TIN</b> = 1C2YT-XXXX	<b>TAIN</b> = 1C2YA-XXXX
<b>TICN</b> = 1C2YN-XXXX	<b>AM200<sup>®</sup></b> = 1C2YH-XXXX

T-A Drill Inserts




2 Series | HSS | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")

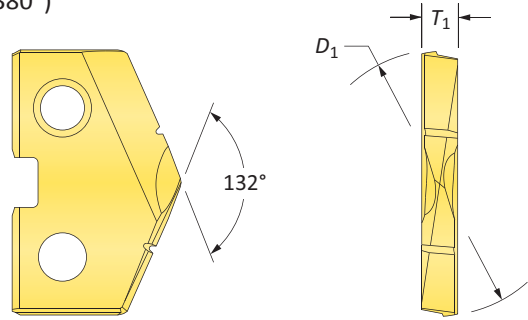

HSS Inserts – HSS

Series	Insert				Part No.		
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	 TiN	 TiAlN	 TiCN
2	24.50	0.9646	–	4.76	132T-24.5	132A-24.5	132N-24.5
	24.61	0.9688	31/32	4.76	132T-0031	132A-0031	132N-0031
	24.79	0.9760	–	4.76	132T-.976	132A-.976	132N-.976
	25.00	0.9843	63/64	4.76	132T-25	132A-25	132N-25
	25.40	1.0000	1	4.76	132T-0100	132A-0100	132N-0100
	25.50	1.0039	–	4.76	132T-25.5	132A-25.5	132N-25.5
	25.80	1.0156	1-1/64	4.76	132T-1.015	132A-1.015	132N-1.015
	26.00	1.0236	–	4.76	132T-26	132A-26	132N-26
	26.19	1.0313	1-1/32	4.76	132T-0101	132A-0101	132N-0101
	26.50	1.0433	–	4.76	132T-26.5	132A-26.5	132N-26.5
	26.59	1.0469	1-3/64	4.76	132T-1.046	132A-1.046	132N-1.046
	26.99	1.0625	1-1/16	4.76	132T-0102	132A-0102	132N-0102
	27.00	1.0630	–	4.76	132T-27	132A-27	132N-27
	27.50	1.0827	–	4.76	132T-27.5	132A-27.5	132N-27.5
	27.78	1.0938	1-3/32	4.76	132T-0103	132A-0103	132N-0103
	28.00	1.1024	–	4.76	132T-28	132A-28	132N-28
	28.18	1.1094	1-7/64	4.76	132T-1.109	132A-1.109	132N-1.109
	28.50	1.1220	–	4.76	132T-28.5	132A-28.5	132N-28.5
	28.58	1.1250	1-1/8	4.76	132T-0104	132A-0104	132N-0104
	29.00	1.1417	–	4.76	132T-29	132A-29	132N-29
29.37	1.1563	1-5/32	4.76	132T-0105	132A-0105	132N-0105	
29.50	1.1614	–	4.76	132T-29.5	132A-29.5	132N-29.5	
30.00	1.1811	–	4.76	132T-30	132A-30	132N-30	
2.5	30.16	1.1875	1-3/16	4.76	132T-0106	132A-0106	132N-0106
	30.50	1.2008	–	4.76	132T-30.5	132A-30.5	132N-30.5
	30.96	1.2188	1-7/32	4.76	132T-0107	132A-0107	132N-0107
	31.00	1.2205	–	4.76	132T-31	132A-31	132N-31
	31.14	1.2260	–	4.76	132T-1.226	132A-1.226	132N-1.226
	31.26	1.2310	–	4.76	132T-1.231	132A-1.231	132N-1.231
	31.34	1.2340	–	4.76	132T-1.234	132A-1.234	132N-1.234
	31.50	1.2402	–	4.76	132T-31.5	132A-31.5	132N-31.5
	31.75	1.2500	1-1/4	4.76	132T-0108	132A-0108	132N-0108
	32.00	1.2598	–	4.76	132T-32	132A-32	132N-32
	32.50	1.2795	–	4.76	132T-32.5	132A-32.5	132N-32.5
	32.54	1.2813	1-9/32	4.76	132T-0109	132A-0109	132N-0109
	33.00	1.2992	–	4.76	132T-33	132A-33	132N-33
	33.34	1.3125	1-5/16	4.76	132T-0110	132A-0110	132N-0110
	33.50	1.3189	–	4.76	132T-33.5	132A-33.5	132N-33.5
	34.00	1.3386	–	4.76	132T-34	132A-34	132N-34
	34.13	1.3438	1-11/32	4.76	132T-0111	132A-0111	132N-0111
	34.50	1.3582	–	4.76	132T-34.5	132A-34.5	132N-34.5
	34.93	1.3750	1-3/8	4.76	132T-0112	132A-0112	132N-0112
	35.00	1.3780	–	4.76	132T-35	132A-35	132N-35

NOTE: 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.

A30: 112 - 143  A30: 68 - 72  A30: 4 - 6  HI, HR, CR, TC, SK, NP, IN, RN, CN, AN, BR, CI, CP, NC, WC


Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX



Inserts sold in quantities of 2

**T-A Drill Inserts**




2 Series | Carbide | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")

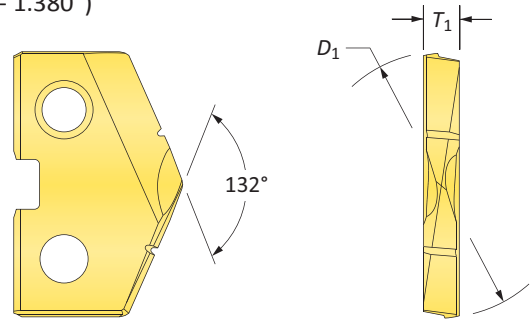


**Carbide Inserts – K20 (C2)**

Series	Insert				Part No.	
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	 TIN	 TiAlN
2	24.50	0.9646	–	4.76	1C22T-24.5	1C22A-24.5
	24.61	0.9688	31/32	4.76	1C22T-0031	1C22A-0031
	24.79	0.9760	–	4.76	1C22T-.976	1C22A-.976
	25.00	0.9843	63/64	4.76	1C22T-25	1C22A-25
	25.40	1.0000	1	4.76	1C22T-0100	1C22A-0100
	25.50	1.0039	–	4.76	1C22T-25.5	1C22A-25.5
	25.80	1.0156	1-1/64	4.76	1C22T-1.015	1C22A-1.015
	26.00	1.0236	–	4.76	1C22T-26	1C22A-26
	26.19	1.0313	1-1/32	4.76	1C22T-0101	1C22A-0101
	26.50	1.0433	–	4.76	1C22T-26.5	1C22A-26.5
	26.59	1.0469	1-3/64	4.76	1C22T-1.046	1C22A-1.046
	26.99	1.0625	1-1/16	4.76	1C22T-0102	1C22A-0102
	27.00	1.0630	–	4.76	1C22T-27	1C22A-27
	27.50	1.0827	–	4.76	1C22T-27.5	1C22A-27.5
	27.78	1.0938	1-3/32	4.76	1C22T-0103	1C22A-0103
	28.00	1.1024	–	4.76	1C22T-28	1C22A-28
	28.18	1.1094	1-7/64	4.76	1C22T-1.109	1C22A-1.109
	28.50	1.1220	–	4.76	1C22T-28.5	1C22A-28.5
	28.58	1.1250	1-1/8	4.76	1C22T-0104	1C22A-0104
	29.00	1.1417	–	4.76	1C22T-29	1C22A-29
29.37	1.1563	1-5/32	4.76	1C22T-0105	1C22A-0105	
29.50	1.1614	–	4.76	1C22T-29.5	1C22A-29.5	
30.00	1.1811	–	4.76	1C22T-30	1C22A-30	
2.5	30.16	1.1875	1-3/16	4.76	1C22T-0106	1C22A-0106
	30.50	1.2008	–	4.76	1C22T-30.5	1C22A-30.5
	30.96	1.2188	1-7/32	4.76	1C22T-0107	1C22A-0107
	31.00	1.2205	–	4.76	1C22T-31	1C22A-31
	31.14	1.2260	–	4.76	1C22T-1.226	1C22A-1.226
	31.26	1.2310	–	4.76	1C22T-1.231	1C22A-1.231
	31.34	1.2340	–	4.76	1C22T-1.234	1C22A-1.234
	31.50	1.2402	–	4.76	1C22T-31.5	1C22A-31.5
	31.75	1.2500	1-1/4	4.76	1C22T-0108	1C22A-0108
	32.00	1.2598	–	4.76	1C22T-32	1C22A-32
	32.50	1.2795	–	4.76	1C22T-32.5	1C22A-32.5
	32.54	1.2813	1-9/32	4.76	1C22T-0109	1C22A-0109
	33.00	1.2992	–	4.76	1C22T-33	1C22A-33
	33.34	1.3125	1-5/16	4.76	1C22T-0110	1C22A-0110
	33.50	1.3189	–	4.76	1C22T-33.5	1C22A-33.5
	34.00	1.3386	–	4.76	1C22T-34	1C22A-34
	34.13	1.3438	1-11/32	4.76	1C22T-0111	1C22A-0111
	34.50	1.3582	–	4.76	1C22T-34.5	1C22A-34.5
	34.93	1.3750	1-3/8	4.76	1C22T-0112	1C22A-0112
	35.00	1.3780	–	4.76	1C22T-35	1C22A-35

**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 

Inserts sold in quantities of 2


TIN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

## T-A Drill Inserts


2 Series | Carbide | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")



Flat Bottom

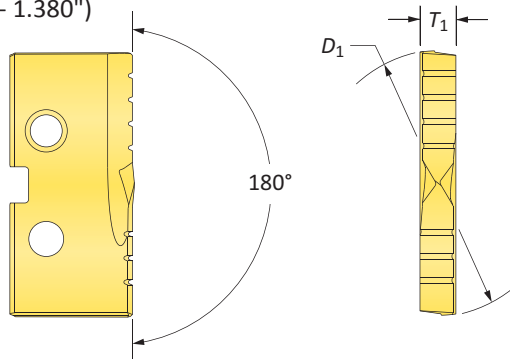


### Carbide Inserts – K20 (C2)


Series	Insert				Flat Bottom Part No.
	$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	TiN 
2	24.50	0.9646	–	4.76	1C22T-24.5-FB
	24.61	0.9688	31/32	4.76	1C22T-0031-FB
	24.79	0.9760	–	4.76	1C22T-.976-FB
	25.00	0.9843	63/64	4.76	1C22T-25-FB
	25.40	1.0000	1	4.76	1C22T-0100-FB
	25.50	1.0039	–	4.76	1C22T-25.5-FB
	25.80	1.0156	1-1/64	4.76	1C22T-1.015-FB
	26.00	1.0236	–	4.76	1C22T-26-FB
	26.19	1.0313	1-1/32	4.76	1C22T-0101-FB
	26.50	1.0433	–	4.76	1C22T-26.5-FB
	26.59	1.0469	1-3/64	4.76	1C22T-1.046-FB
	26.99	1.0625	1-1/16	4.76	1C22T-0102-FB
	27.00	1.0630	–	4.76	1C22T-27-FB
	27.50	1.0827	–	4.76	1C22T-27.5-FB
	27.78	1.0938	1-3/32	4.76	1C22T-0103-FB
	28.00	1.1024	–	4.76	1C22T-28-FB
	28.18	1.1094	1-7/64	4.76	1C22T-1.109-FB
	28.50	1.1220	–	4.76	1C22T-28.5-FB
	28.58	1.1250	1-1/8	4.76	1C22T-0104-FB
	29.00	1.1417	–	4.76	1C22T-29-FB
29.37	1.1563	1-5/32	4.76	1C22T-0105-FB	
29.50	1.1614	–	4.76	1C22T-29.5-FB	
30.00	1.1811	–	4.76	1C22T-30-FB	
2.5	30.16	1.1875	1-3/16	4.76	1C22T-0106-FB
	30.50	1.2008	–	4.76	1C22T-30.5-FB
	30.96	1.2188	1-7/32	4.76	1C22T-0107-FB
	31.00	1.2205	–	4.76	1C22T-31-FB
	31.14	1.2260	–	4.76	1C22T-1.226-FB
	31.26	1.2310	–	4.76	1C22T-1.231-FB
	31.34	1.2340	–	4.76	1C22T-1.234-FB
	31.50	1.2402	–	4.76	1C22T-31.5-FB
	31.75	1.2500	1-1/4	4.76	1C22T-0108-FB
	32.00	1.2598	–	4.76	1C22T-32-FB
	32.50	1.2795	–	4.76	1C22T-32.5-FB
	32.54	1.2813	1-9/32	4.76	1C22T-0109-FB
	33.00	1.2992	–	4.76	1C22T-33-FB
	33.34	1.3125	1-5/16	4.76	1C22T-0110-FB
	33.50	1.3189	–	4.76	1C22T-33.5-FB
	34.00	1.3386	–	4.76	1C22T-34-FB
	34.13	1.3438	1-11/32	4.76	1C22T-0111-FB
	34.50	1.3582	–	4.76	1C22T-34.5-FB
	34.93	1.3750	1-3/8	4.76	1C22T-0112-FB
	35.00	1.3780	–	4.76	1C22T-35-FB

**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.


A30: 112 - 143



A30: 68 - 72



A30: 4 - 6



FN



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

Inserts sold in quantities of 2

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

### T-A Drill Inserts

2 Series | Carbide | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")


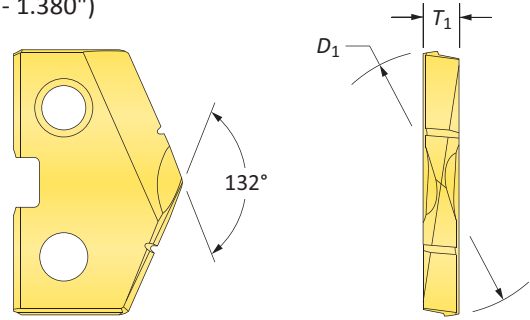



Carbide Inserts – P40 (C5) | K10 (C3) | N2

Series	Insert				C5 Part No.		C3 Part No.	N2 Part No.
	D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	TiN	TiAlN	TiAlN (Cast Iron)	Diamond Film*
2	24.50	0.9646	–	4.76	1C52T-24.5	1C52A-24.5	1C32A-24.5-CI	1N22D-24.5
	24.61	0.9688	31/32	4.76	1C52T-0031	1C52A-0031	1C32A-0031-CI	1N22D-0031
	24.79	0.9760	–	4.76	1C52T-.976	1C52A-.976	1C32A-.976-CI	1N22D-.976
	25.00	0.9843	63/64	4.76	1C52T-25	1C52A-25	1C32A-25-CI	1N22D-25
	25.40	1.0000	1	4.76	1C52T-0100	1C52A-0100	1C32A-0100-CI	1N22D-0100
	25.50	1.0039	–	4.76	1C52T-25.5	1C52A-25.5	1C32A-25.5-CI	1N22D-25.5
	25.80	1.0156	1-1/64	4.76	1C52T-1.015	1C52A-1.015	1C32A-1.015-CI	1N22D-1.015
	26.00	1.0236	–	4.76	1C52T-26	1C52A-26	1C32A-26-CI	1N22D-26
	26.19	1.0313	1-1/32	4.76	1C52T-0101	1C52A-0101	1C32A-0101-CI	1N22D-0101
	26.50	1.0433	–	4.76	1C52T-26.5	1C52A-26.5	1C32A-26.5-CI	1N22D-26.5
	26.59	1.0469	1-3/64	4.76	1C52T-1.046	1C52A-1.046	1C32A-1.046-CI	1N22D-1.046
	26.99	1.0625	1-1/16	4.76	1C52T-0102	1C52A-0102	1C32A-0102-CI	1N22D-0102
	27.00	1.0630	–	4.76	1C52T-27	1C52A-27	1C32A-27-CI	1N22D-27
	27.50	1.0827	–	4.76	1C52T-27.5	1C52A-27.5	1C32A-27.5-CI	1N22D-27.5
	27.78	1.0938	1-3/32	4.76	1C52T-0103	1C52A-0103	1C32A-0103-CI	1N22D-0103
	28.00	1.1024	–	4.76	1C52T-28	1C52A-28	1C32A-28-CI	1N22D-28
	28.18	1.1094	1-7/64	4.76	1C52T-1.109	1C52A-1.109	1C32A-1.109-CI	1N22D-1.109
	28.50	1.1220	–	4.76	1C52T-28.5	1C52A-28.5	1C32A-28.5-CI	1N22D-28.5
	28.58	1.1250	1-1/8	4.76	1C52T-0104	1C52A-0104	1C32A-0104-CI	1N22D-0104
	29.00	1.1417	–	4.76	1C52T-29	1C52A-29	1C32A-29-CI	1N22D-29
29.37	1.1563	1-5/32	4.76	1C52T-0105	1C52A-0105	1C32A-0105-CI	1N22D-0105	
29.50	1.1614	–	4.76	1C52T-29.5	1C52A-29.5	1C32A-29.5-CI	1N22D-29.5	
30.00	1.1811	–	4.76	1C52T-30	1C52A-30	1C32A-30-CI	1N22D-30	
2.5	30.16	1.1875	1-3/16	4.76	1C52T-0106	1C52A-0106	1C32A-0106-CI	1N22D-0106
	30.50	1.2008	–	4.76	1C52T-30.5	1C52A-30.5	1C32A-30.5-CI	1N22D-30.5
	30.96	1.2188	1-7/32	4.76	1C52T-0107	1C52A-0107	1C32A-0107-CI	1N22D-0107
	31.00	1.2205	–	4.76	1C52T-31	1C52A-31	1C32A-31-CI	1N22D-31
	31.14	1.2260	–	4.76	1C52T-1.226	1C52A-1.226	1C32A-1.226-CI	1N22D-1.226
	31.26	1.2310	–	4.76	1C52T-1.231	1C52A-1.231	1C32A-1.231-CI	1N22D-1.231
	31.34	1.2340	–	4.76	1C52T-1.234	1C52A-1.234	1C32A-1.234-CI	1N22D-1.234
	31.50	1.2402	–	4.76	1C52T-31.5	1C52A-31.5	1C32A-31.5-CI	1N22D-31.5
	31.75	1.2500	1-1/4	4.76	1C52T-0108	1C52A-0108	1C32A-0108-CI	1N22D-0108
	32.00	1.2598	–	4.76	1C52T-32	1C52A-32	1C32A-32-CI	1N22D-32
	32.50	1.2795	–	4.76	1C52T-32.5	1C52A-32.5	1C32A-32.5-CI	1N22D-32.5
	32.54	1.2813	1-9/32	4.76	1C52T-0109	1C52A-0109	1C32A-0109-CI	1N22D-0109
	33.00	1.2992	–	4.76	1C52T-33	1C52A-33	1C32A-33-CI	1N22D-33
	33.34	1.3125	1-5/16	4.76	1C52T-0110	1C52A-0110	1C32A-0110-CI	1N22D-0110
	33.50	1.3189	–	4.76	1C52T-33.5	1C52A-33.5	1C32A-33.5-CI	1N22D-33.5
	34.00	1.3386	–	4.76	1C52T-34	1C52A-34	1C32A-34-CI	1N22D-34
	34.13	1.3438	1-11/32	4.76	1C52T-0111	1C52A-0111	1C32A-0111-CI	1N22D-0111
	34.50	1.3582	–	4.76	1C52T-34.5	1C52A-34.5	1C32A-34.5-CI	1N22D-34.5
	34.93	1.3750	1-3/8	4.76	1C52T-0112	1C52A-0112	1C32A-0112-CI	1N22D-0112
	35.00	1.3780	–	4.76	1C52T-35	1C52A-35	1C32A-35-CI	1N22D-35

**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.

\*Diamond Film is only available in standard geometry. For additional geometries, please contact Application Engineering.




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply.

Inserts sold in quantities of 2	
TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX


T-A Drill Insert Holders

2 Series | Flange Shank | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")

A  
DRILLING

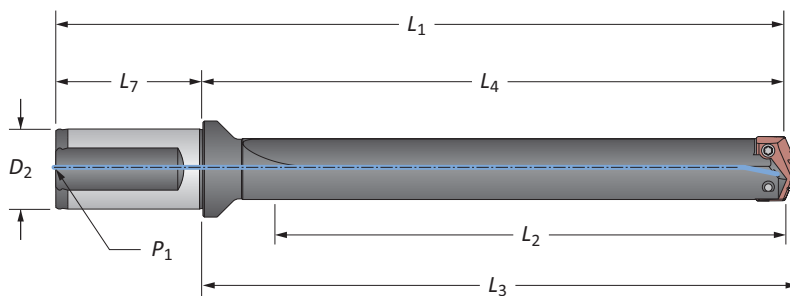

B  
BORING

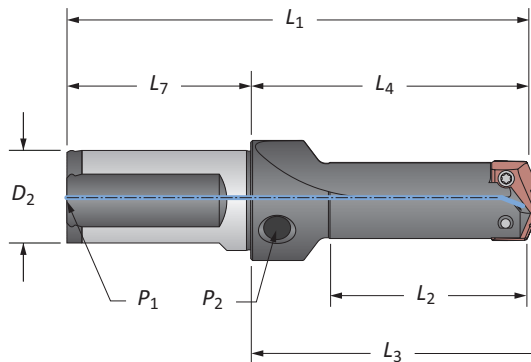

Stub Length

C  
REAMING

Straight Flute

Series	Length	Body				Shank			Part No.	
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>		
m	2	Stub	57.2	88.5	92.1	148.5	32.0	60.0	1/4*	21020S-32FM
		Short	85.7	128.6	132.2	188.6	32.0	60.0	1/4*	22020S-32FM
		Intermediate	137.0	179.4	183.0	239.4	32.0	60.0	1/4*	23020S-32FM
		Standard	187.0	230.2	233.8	290.2	32.0	60.0	1/4*	24020S-32FM
		XL	511.0	554.1	557.7	614.1	32.0	60.0	1/4*	⚠ 27020S-32FM
		3XL	692.0	735.1	738.7	795.1	32.0	60.0	1/4*	⚠ 29020S-32FM
2.5	Stub	57.2	123.4	127.0	183.4	32.0	60.0	1/4*	21025S-32FM	
		85.7	128.6	132.2	188.6	32.0	60.0	1/4*	22025S-32FM	
i	2	Stub	2-1/4	3-31/64	3-5/8	5-49/64	1-1/4	2-9/32	1/4	21020S-125F
		Short	3-5/8	5-1/16	5-13/64	7-11/32	1-1/4	2-9/32	1/4	22020S-125F
		Intermediate	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4	23020S-125F
		Standard	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4	24020S-125F
		Extended	11-3/8	13-1-16	13-13/64	15-11/32	1-1/4	2-9/32	1/4	⚠ 25020S-125F
	2.5	Stub	2-1/4	4-55/64	5	7-9/64	1-1/4	2-9/32	1/4	21025S-125F
		Short	3-5/8	5-1/16	5-13/64	7-11/32	1-1/4	2-9/32	1/4	22025S-125F
		Intermediate	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4	23025S-125F
		Standard	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4	24025S-125F
		Extended	11-3/8	13-1-16	13-13/64	15-11/32	1-1/4	2-9/32	1/4	⚠ 25025S-125F

\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

NOTE: 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.


F  
THREADING

Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7495-IP15-1	7495N-IP15-1	8IP-15	8IP-15TL	8IP-15B	690 N-cm (61.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

X  
SPECIALS



m = Metric (mm)

i = Imperial (in)


Screws sold in quantities of 10

**⚠ WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.



## T-A Drill Insert Holders

2 Series | Flange Shank | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")

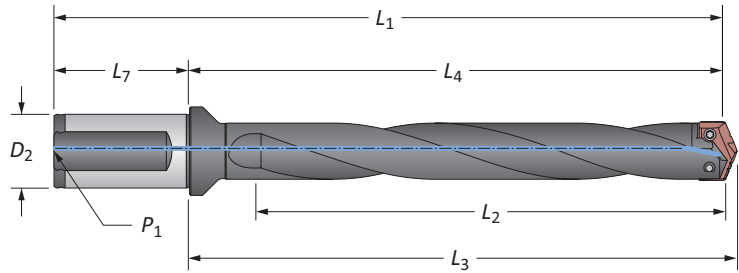






### Helical Flute

Series	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
M	Intermediate	136.5	179.4	183.0	239.4	32.0	60.0	1/4*	23020H-32FM
	Standard	187.3	230.2	233.8	290.2	32.0	60.0	1/4*	24020H-32FM
	Standard Plus	238.0	280.9	284.5	340.9	32.0	60.0	1/4*	24520H-32FM
	Extended	288.9	331.8	335.4	391.8	32.0	60.0	1/4*	25020H-32FM
	Long	410.0	452.9	456.5	512.9	32.0	60.0	1/4*	26020H-32FM
2.5	Intermediate	136.5	179.4	183.0	239.4	32.0	60.0	1/4*	23025H-32FM
	Standard	187.3	230.2	233.8	290.2	32.0	60.0	1/4*	24025H-32FM
	Extended	288.9	331.8	335.4	391.8	32.0	60.0	1/4*	25025H-32FM
I	Intermediate	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4	23020H-125F
	Standard	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4	24020H-125F
	Standard Plus	9-3/8	11-1/16	11-13/64	13-31/64	1-1/4	2-9/32	1/4	24520H-125F
	Extended	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4	25020H-125F
	Long	16-1/8	17-53/64	7-31/32	20-1/4	1-1/4	2-9/32	1/4	26020H-125F
	Intermediate	5-3/8	7-1/16	7-13/64	9-11/32	1-1/4	2-9/32	1/4	23025H-125F
	Standard	7-3/8	9-1/16	9-13/64	11-11/32	1-1/4	2-9/32	1/4	24025H-125F
	Extended	11-3/8	13-1/16	13-13/64	15-11/32	1-1/4	2-9/32	1/4	25025H-125F

\*Metric thread to BSP and ISO 7-1


**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.

### Connection Accessories

					Admissible Tightening Torque*
7495-IP15-1	7495N-IP15-1	8IP-15	8IP-15TL	8IP-15B	

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 58 - 67



M = Metric (mm)  
I = Imperial (in)

Screws sold in quantities of 10

**1. WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.


2

 DRILLING | T-A® Replaceable Insert Drilling System

## T-A Drill Insert Holders

2 Series | Taper Shank | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")



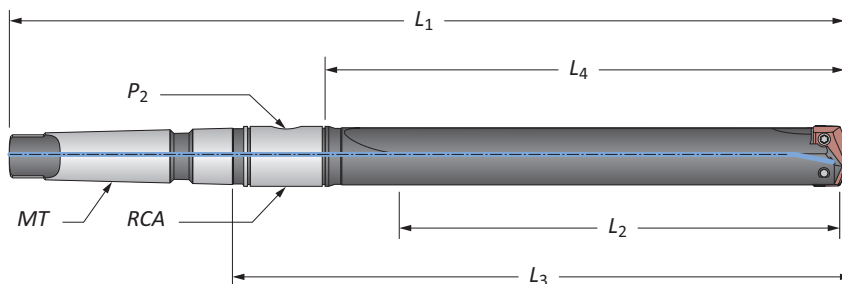

### Straight Flute

Series	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA	
<b>m</b> 2	Short	69.8	98.4	142.5	232.5	#4**	1/8*	2T-3SRM	<b>22020S-004M</b>
2.5	Short	69.8	98.4	142.5	232.5	#4**	1/8*	2T-4SRM	<b>22025S-004M</b>
<b>i</b> 2	Short	3-3/8	4-1/2	6-15/64	9-25/32	#3	1/8	2T-3SR	<b>22020S-003I</b>
	Short	3-3/8	4-1/2	6-19/64	10-25/32	#4	1/8	2T-3SR	<b>22020S-004I</b>
	Intermediate	5-3/8	6-1/2	8-19/64	12-25/32	#4	1/8	2T-3SR	<b>23020S-004I</b>
	Standard	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	2T-3SR	<b>24020S-003I</b>
	Standard	7-3/8	8-1/2	10-19/64	14-25/32	#4	1/8	2T-3SR	<b>24020S-004I</b>
2.5	Extended	11-3/8	12-1/2	14-15/64	18-25/32	#4	1/4	2T-3SR	<b>25020S-004I</b>
	Short	3-3/8	4-1/2	6-15/64	9-25/32	#3	1/8	2T-3SR	<b>22025S-003I</b>
	Short	3-3/8	4-1/2	6-37/64	11-1/16	#4	1/4	2T-4SR	<b>22025S-004I</b>
	Intermediate	5-3/8	6-1/2	8-37/64	13-1/16	#4	1/4	2T-4SR	<b>23025S-004I</b>
	Standard	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	2T-3SR	<b>24025S-003I</b>
	Standard	7-3/8	8-1/2	10-37/64	15-1/16	#4	1/8	2T-4SR	<b>24025S-004I</b>
Extended	11-3/8	12-1/2	14-37/64	19-1/16	#4	1/4	2T-4SR	<b>25025S-004I</b>	

\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.

D

BURNISHING

F

THREADING


### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7495-IP15-1	7495N-IP15-1	8IP-15	8IP-15TL	8IP-15B	690 N-cm (61.0 in-lbs)

 \*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

Key on A30: 1

A30: 58 - 67      A30: 73 & 110      A30: 73 & 111


**m** = Metric (mm)

**i** = Imperial (in)

Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

A30: 70


[www.alliedmachine.com](http://www.alliedmachine.com) | +44 (0) 1384 400 900 | [enquiries.eu@alliedmachine.com](mailto:enquiries.eu@alliedmachine.com)

X

SPECIALS

## T-A Drill Insert Holders

2 Series | Taper Shank | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")

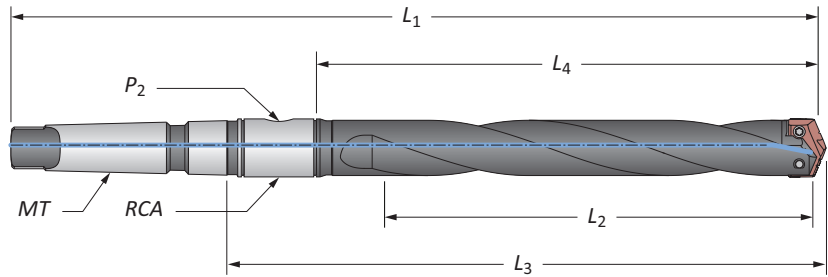

### Helical Flute






Series	Length	Body				Shank			Part No.	
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA		
m	2	Intermediate	136.5	165.1	211.2	324.6	#4**	1/8*	2T-3SRM	23020H-004M
		Standard	187.3	215.9	262.0	375.4	#4**	1/8*	2T-3SRM	24020H-004M
		Extended	289.0	317.5	363.6	477.0	#4**	1/8*	2T-3SRM	25020H-004M
m	2.5	Intermediate	136.5	165.1	218.4	331.8	#4**	1/4*	2T-4SRM	23025H-004M
		Standard	187.3	215.9	269.2	382.6	#4**	1/4*	2T-4SRM	24025H-004M
		Extended	289.0	317.5	370.8	484.2	#4**	1/4*	2T-4SRM	25025H-004M
i	2	Intermediate	5-3/8	6-1/2	8-19/64	12-25/32	#4	1/8	2T-3SR	23020H-004I
		Standard	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	2T-3SR	24020H-003I
		Standard	7-3/8	8-1/2	10-19/64	14-25/32	#4	1/8	2T-3SR	24020H-004I
		Extended	11-3/8	12-1/2	14-15/64	18-25/32	#4	1/8	2T-3SR	25020H-004I
	2.5	Intermediate	5-3/8	6-1/2	8-37/64	13-1/16	#4	1/4	2T-4SR	23025H-004I
		Standard	7-3/8	8-1/2	10-15/64	13-25/32	#3	1/8	2T-3SR	24025H-003I
		Standard	7-3/8	8-1/2	10-37/64	15-1/6	#4	1/4	2T-4SR	24025H-004I
	Extended	11-3/8	12-1/2	14-37/64	19-1/16	#4	1/4	2T-4SR	25025H-004I	

\*Metric thread to BSP and ISO 7-1


\*\*Per ISO 296 type BEK

**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.

### Connection Accessories

					Admissible Tightening Torque*
7495-IP15-1	7495N-IP15-1	8IP-15	8IP-15TL	8IP-15B	
					690 N-cm (61.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



m = Metric (mm)

i = Imperial (in)

Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

A DRILLING  
B BORING  
C REAMING  
D BURNISHING  
E THREADING  
X SPECIALS


2

 DRILLING | T-A® Replaceable Insert Drilling System





## T-A Drill Insert Holders

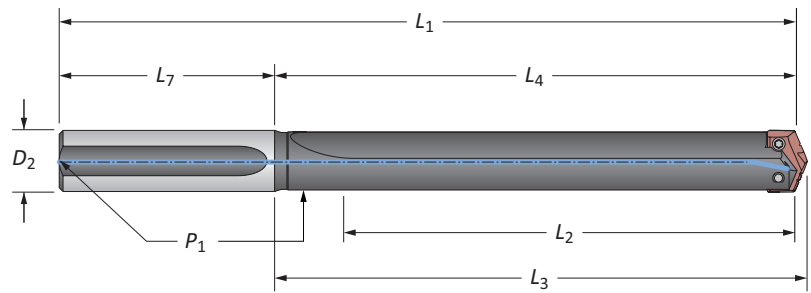2 Series | Straight Shank | Diameter Range: 24.41 mm - 35.05 mm (0.961" - 1.380")










### Straight Flute

Series	Length	Body				Shank			Part No.
		$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
2	Short	3-3/8	4-1/2	4-41/64	8	1	3-1/2	1/8	22020S-100L
	Short	3-3/8	4-1/2	4-41/64	8	1-1/4	3-1/2	1/8	22020S-125L
	Intermediate	5-3/8	6-1/2	6-41/64	10	1-1/4	3-1/2	1/8	23020S-125L
	Standard	7-3/8	8-1/2	8-41/64	12	1	3-1/2	1/8	24020S-100L
	Standard	7-3/8	8-1/2	8-41/64	12	1-1/4	3-1/2	1/8	24020S-125L
	Extended	11-3/8	12-1/2	12-41/64	16	1-1/4	3-1/2	1/8	 25020S-125L
	XL	20-1/8	21-1/4	21-25/64	24-3/4	1-1/4	3-1/2	1/8	 27020S-125L
2.5	3XL	27-1/4	28-3/8	28-33/64	31-7/8	1-1/4	3-1/2	1/8	 29020S-125L
	Short	3-3/8	4-1/2	4-41/64	8	1	3-1/2	1/8*	22025S-100L
	Short	3-3/8	4-1/2	4-41/64	8	1-1/4	3-1/2	1/8*	22025S-125L
	Intermediate	5-3/8	6-1/2	6-41/64	10	1-1/4	3-1/2	1/8*	23025S-125L
	Standard	7-3/8	8-1/2	8-41/64	12	1	3-1/2	1/8*	24025S-100L
	Standard	7-3/8	8-1/2	8-41/64	12	1-1/4	3-1/2	1/8*	24025S-125L
	Extended	11-3/8	12-1/2	12-41/64	16	1-1/4	3-1/2	1/8*	 25025S-125L

**NOTE:** 2.5 series inserts fit into both 2 and 2.5 series holders. However, 2 series inserts ONLY fit into 2 series holders. See page A30: 7 for visual.


### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
					
7495-IP15-1	7495N-IP15-1	8IP-15	8IP-15TL	8IP-15B	690 N-cm (61.0 in-lbs)


\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 58 - 67      A30: 73 & 111

Key on A30: 1



 = Metric (mm)

 = Imperial (in)

Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

A30: 72

[www.alliedmachine.com](http://www.alliedmachine.com) | +44 (0) 1384 400 900 | [enquiries.eu@alliedmachine.com](mailto:enquiries.eu@alliedmachine.com)

A DRILLING

B BORING

C REAMING

D BURINISHING


E THREADING

X SPECIALS



## T-A Drill Accessories

2 Series | Chamfer Rings | Rotary Coolant Adapters | Torx® Plus Screws

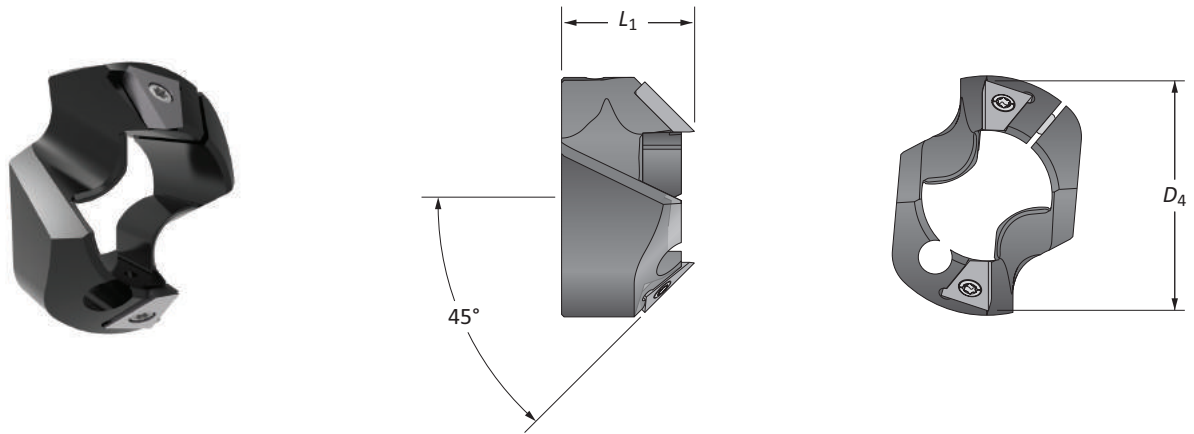


### T-ACR 45 Chamfer Ring

Holder Series	D <sub>1</sub> Range	Chamfer Ring		Part No.	Insert Part No.	Insert Screw	Insert Driver	Clamping Screw	Insert Driver
		D <sub>4</sub>	L <sub>1</sub>						
2	0.9610 - 1.3800	1-9/16	1	T-ACR-45-2	T-ACRI-45-B-C5A	7255-IP8-1	8IP-8	7514-IP20-1	8IP-20

### Rotary Coolant Adapter (RCA) and Accessories

Metric	ID	OD	L <sub>1</sub>	Driving Rod Thread	P <sub>1</sub>	Part No.	RCA O-Rings	
							Kit Part No.**	Replacements
M	25.40	53.97	28.57	M8 x 1.25	1/8*	⚠ 2T-3SRM	2T1-3SR	2T1-3OR-10
	31.75	63.50	34.92	M10 x 1.50	1/4*	⚠ 2T-4SRM	2T1-4SR	2T1-4OR-10
I	1	2-1/8	1-1/8	5/16-18	1/8	⚠ 2T-3SR	2T1-3SR	2T1-3OR-10
	1-1/4	2-1/2	1-3/8	3/8-16	1/4	⚠ 2T-4SR	2T1-4SR	2T1-4OR-10

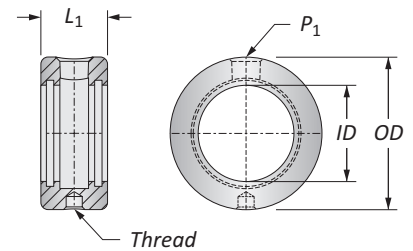

\*Thread to BSP and ISO 7-1


\*\*RCA Repair Kit includes (2) O-rings, (2) snap rings, and (2) thrust washers

⚠ Refer to page A30: 110 for proper RCA assembly and safety information

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7495-IP15-1	7495N-IP15-1	8IP-15	8IP-15TL	8IP-15B	690 N-cm (61.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength





M = Metric (mm)  
I = Imperial (in)

Inserts sold separately  
Screws sold in packs of 10  
O-rings sold in packs of 10



**⚠ WARNING** RCA rotation during drilling can cause hose and/or hose fitting failure, machinery damage, and/or serious injury. To prevent, use RCA and positive stop studs when drilling. Factory technical assistance is also available for your specific applications.




## GEN2 T-A Drill Inserts

3 Series | HSS | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")

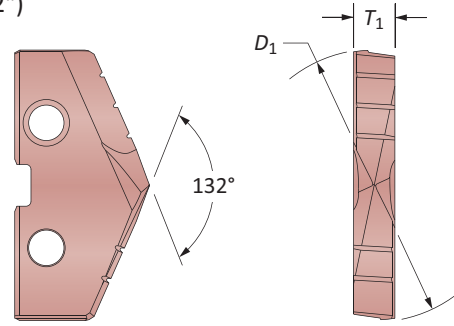

### HSS Inserts – Premium Cobalt

Insert				Part No.	
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200®	 TiN
35.72	1.4063	1-13/32	6.35	483H-0113	483T-0113
36.00	1.4173	-	6.35	483H-36	483T-36
36.51	1.4375	1-7/16	6.35	483H-0114	483T-0114
37.00	1.4567	-	6.35	483H-37	483T-37
37.31	1.4688	1-15/32	6.35	483H-0115	483T-0115
38.00	1.4961	-	6.35	483H-38	483T-38
38.10	1.5000	1-1/2	6.35	483H-0116	483T-0116
38.89	1.5313	1-17/32	6.35	483H-0117	483T-0117
39.00	1.5354	-	6.35	483H-39	483T-39
39.29	1.5470	-	6.35	483H-1.547	483T-1.547
39.69	1.5625	1-9/16	6.35	483H-0118	483T-0118
40.00	1.5748	-	6.35	483H-40	483T-40
40.48	1.5938	1-19/32	6.35	483H-0119	483T-0119
41.00	1.6142	-	6.35	483H-41	483T-41
41.28	1.6250	1-5/8	6.35	483H-0120	483T-0120
42.00	1.6535	-	6.35	483H-42	483T-42
42.07	1.6563	1-21/32	6.35	483H-0121	483T-0121
42.86	1.6875	1-11/16	6.35	483H-0122	483T-0122
43.00	1.6929	-	6.35	483H-43	483T-43
43.66	1.7188	1-23/32	6.35	483H-0123	483T-0123
44.00	1.7323	-	6.35	483H-44	483T-44
44.45	1.7500	1-3/4	6.35	483H-0124	483T-0124
45.00	1.7717	-	6.35	483H-45	483T-45
45.24	1.7813	1-25/32	6.35	483H-0125	483T-0125
45.50	1.7913	-	6.35	483H-45.5	483T-45.5
45.64	1.7970	-	6.35	483H-1.797	483T-1.797
46.00	1.8110	-	6.35	483H-46	483T-46
46.04	1.8125	1-13/16	6.35	483H-0126	483T-0126
46.83	1.8438	1-27/32	6.35	483H-0127	483T-0127
47.00	1.8504	-	6.35	483H-47	483T-47
47.63	1.8750	1-7/8	6.35	483H-0128	483T-0128





Inserts sold in quantities of 1

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →



TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX




**GEN2 T-A Drill Inserts**


3 Series | HSS | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")

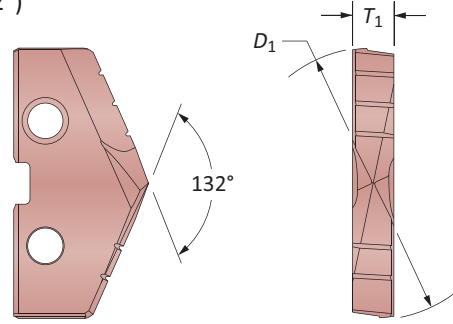

**HSS Inserts – Super Cobalt**

Insert				Part No.	
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200®	 TiN
35.72	1.4063	1-13/32	6.35	453H-0113	453T-0113
36.00	1.4173	-	6.35	453H-36	453T-36
36.51	1.4375	1-7/16	6.35	453H-0114	453T-0114
37.00	1.4567	-	6.35	453H-37	453T-37
37.31	1.4688	1-15/32	6.35	453H-0115	453T-0115
38.00	1.4961	-	6.35	453H-38	453T-38
38.10	1.5000	1-1/2	6.35	453H-0116	453T-0116
38.89	1.5313	1-17/32	6.35	453H-0117	453T-0117
39.00	1.5354	-	6.35	453H-39	453T-39
39.29	1.5470	-	6.35	453H-1.547	453T-1.547
39.69	1.5625	1-9/16	6.35	453H-0118	453T-0118
40.00	1.5748	-	6.35	453H-40	453T-40
40.48	1.5938	1-19/32	6.35	453H-0119	453T-0119
41.00	1.6142	-	6.35	453H-41	453T-41
41.28	1.6250	1-5/8	6.35	453H-0120	453T-0120
42.00	1.6535	-	6.35	453H-42	453T-42
42.07	1.6563	1-21/32	6.35	453H-0121	453T-0121
42.86	1.6875	1-11/16	6.35	453H-0122	453T-0122
43.00	1.6929	-	6.35	453H-43	453T-43
43.66	1.7188	1-23/32	6.35	453H-0123	453T-0123
44.00	1.7323	-	6.35	453H-44	453T-44
44.45	1.7500	1-3/4	6.35	453H-0124	453T-0124
45.00	1.7717	-	6.35	453H-45	453T-45
45.24	1.7813	1-25/32	6.35	453H-0125	453T-0125
45.50	1.7913	-	6.35	453H-45.5	453T-45.5
45.64	1.7970	-	6.35	453H-1.797	453T-1.797
46.00	1.8110	-	6.35	453H-46	453T-46
46.04	1.8125	1-13/16	6.35	453H-0126	453T-0126
46.83	1.8438	1-27/32	6.35	453H-0127	453T-0127
47.00	1.8504	-	6.35	453H-47	453T-47
47.63	1.8750	1-7/8	6.35	453H-0128	453T-0128



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 


Inserts sold in quantities of 1

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX




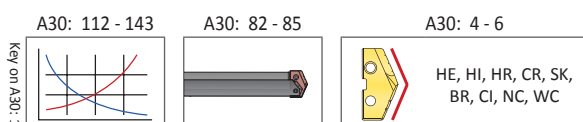
## GEN2 T-A Drill Inserts

3 Series | HSS | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")

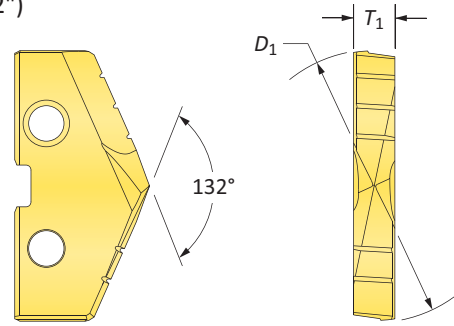

### HSS Inserts – HSS

Insert				Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN
35.72	1.4063	1-13/32	6.35	433T-0113
36.00	1.4173	–	6.35	433T-36
36.51	1.4375	1-7/16	6.35	433T-0114
37.00	1.4567	–	6.35	433T-37
37.31	1.4688	1-15/32	6.35	433T-0115
38.00	1.4961	–	6.35	433T-38
38.10	1.5000	1-1/2	6.35	433T-0116
38.89	1.5313	1-17/32	6.35	433T-0117
39.00	1.5354	–	6.35	433T-39
39.29	1.5470	–	6.35	433T-1.547
39.69	1.5625	1-9/16	6.35	433T-0118
40.00	1.5748	–	6.35	433T-40
40.48	1.5938	1-19/32	6.35	433T-0119
41.00	1.6142	–	6.35	433T-41
41.28	1.6250	1-5/8	6.35	433T-0120
42.00	1.6535	–	6.35	433T-42
42.07	1.6563	1-21/32	6.35	433T-0121
42.86	1.6875	1-11/16	6.35	433T-0122
43.00	1.6929	–	6.35	433T-43
43.66	1.7188	1-23/32	6.35	433T-0123
44.00	1.7323	–	6.35	433T-44
44.45	1.7500	1-3/4	6.35	433T-0124
45.00	1.7717	–	6.35	433T-45
45.24	1.7813	1-25/32	6.35	433T-0125
45.50	1.7913	–	6.35	433T-45.5
45.64	1.7970	–	6.35	433T-1.797
46.00	1.8110	–	6.35	433T-46
46.04	1.8125	1-13/16	6.35	433T-0126
46.83	1.8438	1-27/32	6.35	433T-0127
47.00	1.8504	–	6.35	433T-47
47.63	1.8750	1-7/8	6.35	433T-0128




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX


Inserts sold in quantities of 1

### T-A Drill Inserts

3 Series | HSS | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")

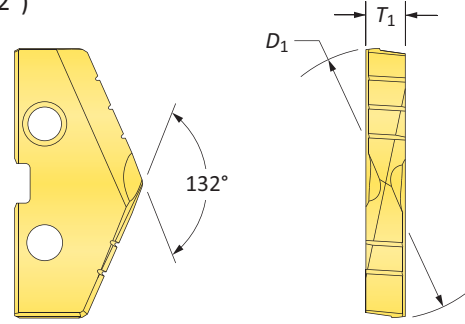

#### HSS Inserts – Super Cobalt

Insert				Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN
35.72	1.4063	1-13/32	6.35	153T-0113
36.00	1.4173	-	6.35	153T-36
36.51	1.4375	1-7/16	6.35	153T-0114
37.00	1.4567	-	6.35	153T-37
37.31	1.4688	1-15/32	6.35	153T-0115
38.00	1.4961	-	6.35	153T-38
38.10	1.5000	1-1/2	6.35	153T-0116
38.89	1.5313	1-17/32	6.35	153T-0117
39.00	1.5354	-	6.35	153T-39
39.29	1.5470	-	6.35	153T-1.547
39.69	1.5625	1-9/16	6.35	153T-0118
40.00	1.5748	-	6.35	153T-40
40.48	1.5938	1-19/32	6.35	153T-0119
41.00	1.6142	-	6.35	153T-41
41.28	1.6250	1-5/8	6.35	153T-0120
42.00	1.6535	-	6.35	153T-42
42.07	1.6563	1-21/32	6.35	153T-0121
42.86	1.6875	1-11/16	6.35	153T-0122
43.00	1.6929	-	6.35	153T-43
43.66	1.7188	1-23/32	6.35	153T-0123
44.00	1.7323	-	6.35	153T-44
44.45	1.7500	1-3/4	6.35	153T-0124
45.00	1.7717	-	6.35	153T-45
45.24	1.7813	1-25/32	6.35	153T-0125
45.50	1.7913	-	6.35	153T-45.5
45.64	1.7970	-	6.35	153T-1.797
46.00	1.8110	-	6.35	153T-46
46.04	1.8125	1-13/16	6.35	153T-0126
46.83	1.8438	1-27/32	6.35	153T-0127
47.00	1.8504	-	6.35	153T-47
47.63	1.8750	1-7/8	6.35	153T-0128

A

DRILLING

B

BORING

C

REAMING

D




BURNISHING


F

THREADING

X

SPECIALS



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 

Inserts sold in quantities of 1

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

3




 DRILLING | T-A® Replaceable Insert Drilling System

## T-A Drill Inserts




3 Series | HSS | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")


90° Spot &amp; Chamfer

HSS Inserts – Super Cobalt

Insert				Part No.		
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN	 TiCN
35.72	1.4063	1-13/32	6.35	153T-0113-SP	153A-0113-SP	153N-0113-SP
36.00	1.4173	-	6.35	153T-36-SP	153A-36-SP	153N-36-SP
36.51	1.4375	1-7/16	6.35	153T-0114-SP	153A-0114-SP	153N-0114-SP
37.00	1.4567	-	6.35	153T-37-SP	153A-37-SP	153N-37-SP
37.31	1.4688	1-15/32	6.35	153T-0115-SP	153A-0115-SP	153N-0115-SP
38.00	1.4961	-	6.35	153T-38-SP	153A-38-SP	153N-38-SP
38.10	1.5000	1-1/2	6.35	153T-0116-SP	153A-0116-SP	153N-0116-SP
38.89	1.5313	1-17/32	6.35	153T-0117-SP	153A-0117-SP	153N-0117-SP
39.00	1.5354	-	6.35	153T-39-SP	153A-39-SP	153N-39-SP
39.29	1.5470	-	6.35	153T-1.547-SP	153A-1.547-SP	153N-1.547-SP
39.69	1.5625	1-9/16	6.35	153T-0118-SP	153A-0118-SP	153N-0118-SP
40.00	1.5748	-	6.35	153T-40-SP	153A-40-SP	153N-40-SP
40.48	1.5938	1-19/32	6.35	153T-0119-SP	153A-0119-SP	153N-0119-SP
41.00	1.6142	-	6.35	153T-41-SP	153A-41-SP	153N-41-SP
41.28	1.6250	1-5/8	6.35	153T-0120-SP	153A-0120-SP	153N-0120-SP
42.00	1.6535	-	6.35	153T-42-SP	153A-42-SP	153N-42-SP
42.07	1.6563	1-21/32	6.35	153T-0121-SP	153A-0121-SP	153N-0121-SP
42.86	1.6875	1-11/16	6.35	153T-0122-SP	153A-0122-SP	153N-0122-SP
43.00	1.6929	-	6.35	153T-43-SP	153A-43-SP	153N-43-SP
43.66	1.7188	1-23/32	6.35	153T-0123-SP	153A-0123-SP	153N-0123-SP
44.00	1.7323	-	6.35	153T-44-SP	153A-44-SP	153N-44-SP
44.45	1.7500	1-3/4	6.35	153T-0124-SP	153A-0124-SP	153N-0124-SP
45.00	1.7717	-	6.35	153T-45-SP	153A-45-SP	153N-45-SP
45.24	1.7813	1-25/32	6.35	153T-0125-SP	153A-0125-SP	153N-0125-SP
45.50	1.7913	-	6.35	153T-45.5-SP	153A-45.5-SP	153N-45.5-SP
45.64	1.7970	-	6.35	153T-1.797-SP	153A-1.797-SP	153N-1.797-SP
46.00	1.8110	-	6.35	153T-46-SP	153A-46-SP	153N-46-SP
46.04	1.8125	1-13/16	6.35	153T-0126-SP	153A-0126-SP	153N-0126-SP
46.83	1.8438	1-27/32	6.35	153T-0127-SP	153A-0127-SP	153N-0127-SP
47.00	1.8504	-	6.35	153T-47-SP	153A-47-SP	153N-47-SP
47.63	1.8750	1-7/8	6.35	153T-0128-SP	153A-0128-SP	153N-0128-SP

Inserts sold in quantities of 1

A30: 112 - 143 
 A30: 82 - 85 
 A30: 4 - 6  SW

 Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

A30: 78

www.alliedmachine.com | +44 (0) 1384 400 900 | enquiries.eu@alliedmachine.com

A DRILLING

B BORING

C REAMING

D BURISHING

E THREADING


X SPECIALS

**T-A Drill Inserts**


3 Series | HSS | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")





Flat Bottom

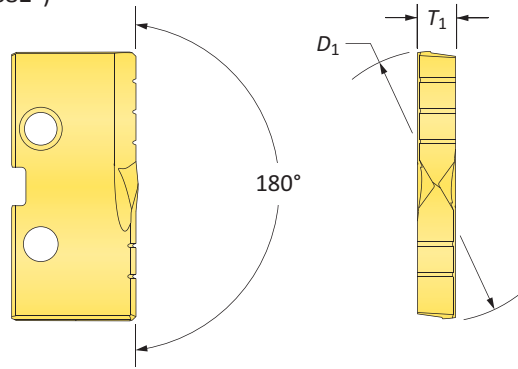

**HSS Inserts – Super Cobalt**

$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	Insert	Part No.
				TIN	TIN
35.72	1.4063	1-13/32	6.35		<b>153T-0113-FB</b>
36.00	1.4173	-	6.35		<b>153T-36-FB</b>
36.51	1.4375	1-7/16	6.35		<b>153T-0114-FB</b>
37.00	1.4567	-	6.35		<b>153T-37-FB</b>
37.31	1.4688	1-15/32	6.35		<b>153T-0115-FB</b>
38.00	1.4961	-	6.35		<b>153T-38-FB</b>
38.10	1.5000	1-1/2	6.35		<b>153T-0116-FB</b>
38.89	1.5313	1-17/32	6.35		<b>153T-0117-FB</b>
39.00	1.5354	-	6.35		<b>153T-39-FB</b>
39.29	1.5470	-	6.35		<b>153T-1.547-FB</b>
39.69	1.5625	1-9/16	6.35		<b>153T-0118-FB</b>
40.00	1.5748	-	6.35		<b>153T-40-FB</b>
40.48	1.5938	1-19/32	6.35		<b>153T-0119-FB</b>
41.00	1.6142	-	6.35		<b>153T-41-FB</b>
41.28	1.6250	1-5/8	6.35		<b>153T-0120-FB</b>
42.00	1.6535	-	6.35		<b>153T-42-FB</b>
42.07	1.6563	1-21/32	6.35		<b>153T-0121-FB</b>
42.86	1.6875	1-11/16	6.35		<b>153T-0122-FB</b>
43.00	1.6929	-	6.35		<b>153T-43-FB</b>
43.66	1.7188	1-23/32	6.35		<b>153T-0123-FB</b>
44.00	1.7323	-	6.35		<b>153T-44-FB</b>
44.45	1.7500	1-3/4	6.35		<b>153T-0124-FB</b>
45.00	1.7717	-	6.35		<b>153T-45-FB</b>
45.24	1.7813	1-25/32	6.35		<b>153T-0125-FB</b>
45.50	1.7913	-	6.35		<b>153T-45.5-FB</b>
45.64	1.7970	-	6.35		<b>153T-1.797-FB</b>
46.00	1.8110	-	6.35		<b>153T-46-FB</b>
46.04	1.8125	1-13/16	6.35		<b>153T-0126-FB</b>
46.83	1.8438	1-27/32	6.35		<b>153T-0127-FB</b>
47.00	1.8504	-	6.35		<b>153T-47-FB</b>
47.63	1.8750	1-7/8	6.35		<b>153T-0128-FB</b>

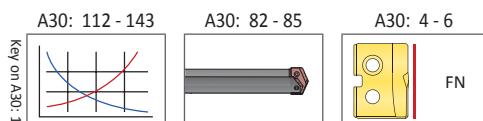


Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 

<b>TIN</b> = 1C2YT-XXXX	<b>TAIAlN</b> = 1C2YA-XXXX
<b>TICN</b> = 1C2YN-XXXX	<b>AM200®</b> = 1C2YH-XXXX



Inserts sold in quantities of 1




## T-A Drill Inserts

3 Series | Carbide | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")

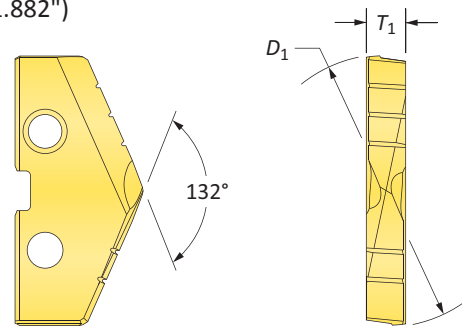

### Carbide Inserts – K20 (C2)

Insert				Part No.	
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN
35.72	1.4063	1-13/32	6.35	<b>1C23T-0113</b>	<b>1C23A-0113</b>
36.00	1.4173	–	6.35	<b>1C23T-36</b>	<b>1C23A-36</b>
36.51	1.4375	1-7/16	6.35	<b>1C23T-0114</b>	<b>1C23A-0114</b>
37.00	1.4567	–	6.35	<b>1C23T-37</b>	<b>1C23A-37</b>
37.31	1.4688	1-15/32	6.35	<b>1C23T-0115</b>	<b>1C23A-0115</b>
38.00	1.4961	–	6.35	<b>1C23T-38</b>	<b>1C23A-38</b>
38.10	1.5000	1-1/2	6.35	<b>1C23T-0116</b>	<b>1C23A-0116</b>
38.89	1.5313	1-17/32	6.35	<b>1C23T-0117</b>	<b>1C23A-0117</b>
39.00	1.5354	–	6.35	<b>1C23T-39</b>	<b>1C23A-39</b>
39.29	1.5470	–	6.35	<b>1C23T-1.547</b>	<b>1C23A-1.547</b>
39.69	1.5625	1-9/16	6.35	<b>1C23T-0118</b>	<b>1C23A-0118</b>
40.00	1.5748	–	6.35	<b>1C23T-40</b>	<b>1C23A-40</b>
40.48	1.5938	1-19/32	6.35	<b>1C23T-0119</b>	<b>1C23A-0119</b>
41.00	1.6142	–	6.35	<b>1C23T-41</b>	<b>1C23A-41</b>
41.28	1.6250	1-5/8	6.35	<b>1C23T-0120</b>	<b>1C23A-0120</b>
42.00	1.6535	–	6.35	<b>1C23T-42</b>	<b>1C23A-42</b>
42.07	1.6563	1-21/32	6.35	<b>1C23T-0121</b>	<b>1C23A-0121</b>
42.86	1.6875	1-11/16	6.35	<b>1C23T-0122</b>	<b>1C23A-0122</b>
43.00	1.6929	–	6.35	<b>1C23T-43</b>	<b>1C23A-43</b>
43.66	1.7188	1-23/32	6.35	<b>1C23T-0123</b>	<b>1C23A-0123</b>
44.00	1.7323	–	6.35	<b>1C23T-44</b>	<b>1C23A-44</b>
44.45	1.7500	1-3/4	6.35	<b>1C23T-0124</b>	<b>1C23A-0124</b>
45.00	1.7717	–	6.35	<b>1C23T-45</b>	<b>1C23A-45</b>
45.24	1.7813	1-25/32	6.35	<b>1C23T-0125</b>	<b>1C23A-0125</b>
45.50	1.7913	–	6.35	<b>1C23T-45.5</b>	<b>1C23A-45.5</b>
45.64	1.7970	–	6.35	<b>1C23T-1.797</b>	<b>1C23A-1.797</b>
46.00	1.8110	–	6.35	<b>1C23T-46</b>	<b>1C23A-46</b>
46.04	1.8125	1-13/16	6.35	<b>1C23T-0126</b>	<b>1C23A-0126</b>
46.83	1.8438	1-27/32	6.35	<b>1C23T-0127</b>	<b>1C23A-0127</b>
47.00	1.8504	–	6.35	<b>1C23T-47</b>	<b>1C23A-47</b>
47.63	1.8750	1-7/8	6.35	<b>1C23T-0128</b>	<b>1C23A-0128</b>




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX



Inserts sold in quantities of 1




### T-A Drill Inserts

3 Series | Carbide | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")

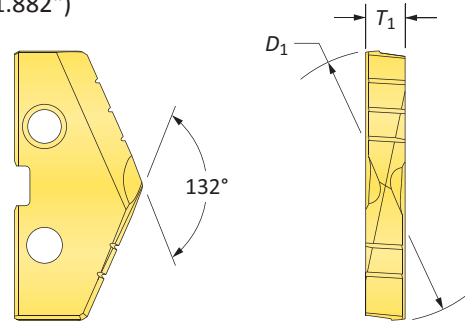

#### Carbide Inserts – P40 (C5)

Insert				Part No.	
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiAlN
35.72	1.4063	1-13/32	6.35	<b>1C53T-0113</b>	<b>1C53A-0113</b>
36.00	1.4173	-	6.35	<b>1C53T-36</b>	<b>1C53A-36</b>
36.51	1.4375	1-7/16	6.35	<b>1C53T-0114</b>	<b>1C53A-0114</b>
37.00	1.4567	-	6.35	<b>1C53T-37</b>	<b>1C53A-37</b>
37.31	1.4688	1-15/32	6.35	<b>1C53T-0115</b>	<b>1C53A-0115</b>
38.00	1.4961	-	6.35	<b>1C53T-38</b>	<b>1C53A-38</b>
38.10	1.5000	1-1/2	6.35	<b>1C53T-0116</b>	<b>1C53A-0116</b>
38.89	1.5313	1-17/32	6.35	<b>1C53T-0117</b>	<b>1C53A-0117</b>
39.00	1.5354	-	6.35	<b>1C53T-39</b>	<b>1C53A-39</b>
39.29	1.5470	-	6.35	<b>1C53T-1.547</b>	<b>1C53A-1.547</b>
39.69	1.5625	1-9/16	6.35	<b>1C53T-0118</b>	<b>1C53A-0118</b>
40.00	1.5748	-	6.35	<b>1C53T-40</b>	<b>1C53A-40</b>
40.48	1.5938	1-19/32	6.35	<b>1C53T-0119</b>	<b>1C53A-0119</b>
41.00	1.6142	-	6.35	<b>1C53T-41</b>	<b>1C53A-41</b>
41.28	1.6250	1-5/8	6.35	<b>1C53T-0120</b>	<b>1C53A-0120</b>
42.00	1.6535	-	6.35	<b>1C53T-42</b>	<b>1C53A-42</b>
42.07	1.6563	1-21/32	6.35	<b>1C53T-0121</b>	<b>1C53A-0121</b>
42.86	1.6875	1-11/16	6.35	<b>1C53T-0122</b>	<b>1C53A-0122</b>
43.00	1.6929	-	6.35	<b>1C53T-43</b>	<b>1C53A-43</b>
43.66	1.7188	1-23/32	6.35	<b>1C53T-0123</b>	<b>1C53A-0123</b>
44.00	1.7323	-	6.35	<b>1C53T-44</b>	<b>1C53A-44</b>
44.45	1.7500	1-3/4	6.35	<b>1C53T-0124</b>	<b>1C53A-0124</b>
45.00	1.7717	-	6.35	<b>1C53T-45</b>	<b>1C53A-45</b>
45.24	1.7813	1-25/32	6.35	<b>1C53T-0125</b>	<b>1C53A-0125</b>
45.50	1.7913	-	6.35	<b>1C53T-45.5</b>	<b>1C53A-45.5</b>
45.64	1.7970	-	6.35	<b>1C53T-1.797</b>	<b>1C53A-1.797</b>
46.00	1.8110	-	6.35	<b>1C53T-46</b>	<b>1C53A-46</b>
46.04	1.8125	1-13/16	6.35	<b>1C53T-0126</b>	<b>1C53A-0126</b>
46.83	1.8438	1-27/32	6.35	<b>1C53T-0127</b>	<b>1C53A-0127</b>
47.00	1.8504	-	6.35	<b>1C53T-47</b>	<b>1C53A-47</b>
47.63	1.8750	1-7/8	6.35	<b>1C53T-0128</b>	<b>1C53A-0128</b>




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

Inserts sold in quantities of 1

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

## T-A Drill Insert Holders

3 Series | Flange Shank | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")

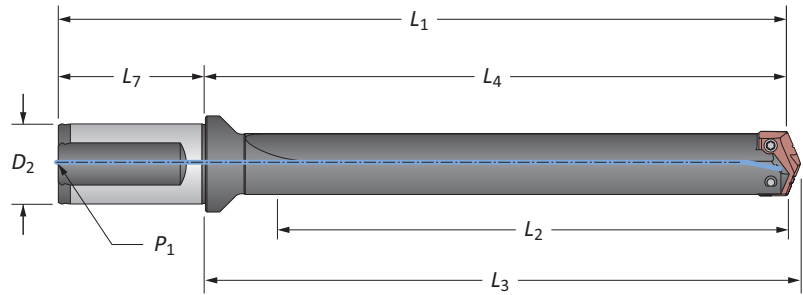


### Straight Flute

	Length	Body				Shank			Part No.
		$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
<b>m</b>	Short	120.7	173.0	177.8	243.0	40.0	70.0	1/4*	22030S-40FM
	Extended	349.3	401.6	406.4	471.6	40.0	70.0	1/4*	25030S-40FM
	XL	558.8	611.1	615.9	681.1	40.0	70.0	1/4*	27030S-40FM
	3XL	787.4	839.7	844.5	909.7	40.0	70.0	1/4*	29030S-40FM
<b>i</b>	Short	4-3/4	6-13/16	7	9-1/2	1-1/2	2-11/16	1/4	22030S-150F
	Intermediate	6-1/2	8-9/16	8-3/4	11-1/4	1-1/2	2-11/16	1/4	23030S-150F
	Standard	8-1/4	10-5/16	10-1/2	13	1-1/2	2-11/16	1/4	24030S-150F

\*Metric thread to BSP and ISO 7-1

**NOTE:** Stub length holders have a 1/4" side pipe tap ( $P_2$ )

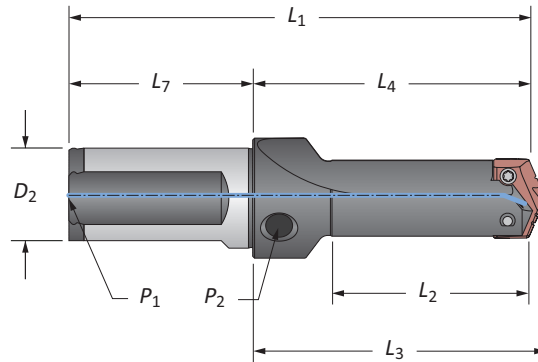

### Straight Flute (Stub Length)

	Length	Body				Shank			Part No.
		$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
<b>m</b>	Stub	76.2	125.0	129.8	195.0	40.0	70.0	1/4*	21030S-40FM
<b>i</b>	Stub	3	4-59/64	5-7/64	7-39/64	1-1/2	2-11/16	1/4	21030S-150F

\*Metric thread to BSP and ISO 7-1


**NOTE:** Stub length holders have a 1/4" side pipe tap ( $P_2$ )

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7514-IP20-1	7514N-IP20-1	8IP-20	-	-	1370 N-cm (121.3 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 74 - 81



**m** = Metric (mm)

**i** = Imperial (in)


Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.



### T-A Drill Insert Holders

3 Series | Flange Shank | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")

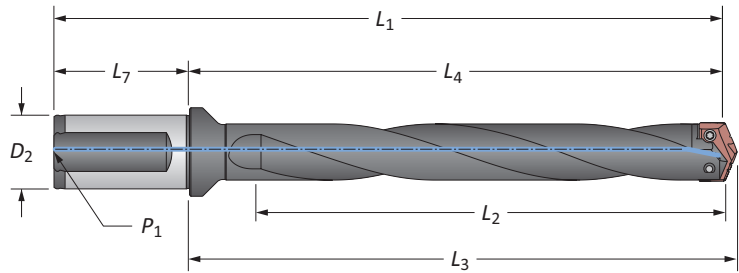






#### Helical Flute


	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
<b>m</b>	Intermediate	165.1	217.5	222.3	287.5	40.0	70.0	1/4*	<b>23030H-40FM</b>
	Standard	209.6	261.9	266.7	331.9	40.0	70.0	1/4*	<b>24030H-40FM</b>
<b>i</b>	Intermediate	6-1/2	8-9/16	8-3/4	11-1/4	1-1/2	2-11/16	1/4	<b>23030H-150F</b>
	Standard	8-1/4	10-5/16	10-1/2	13	1-1/2	2-11/16	1/4	<b>24030H-150F</b>

\*Metric thread to BSP and ISO 7-1

#### Connection Accessories

 Insert Screws	 Nylon Locking Screws	 Insert Driver	 Preset Torque Hand Driver	 Replacement Tips	Admissible Tightening Torque*
7514-IP20-1	7514N-IP20-1	8IP-20	-	-	1370 N-cm (121.3 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength




**m** = Metric (mm)  
**i** = Imperial (in)

Screws sold in quantities of 10

## T-A Drill Insert Holders

3 Series | Taper Shank | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")

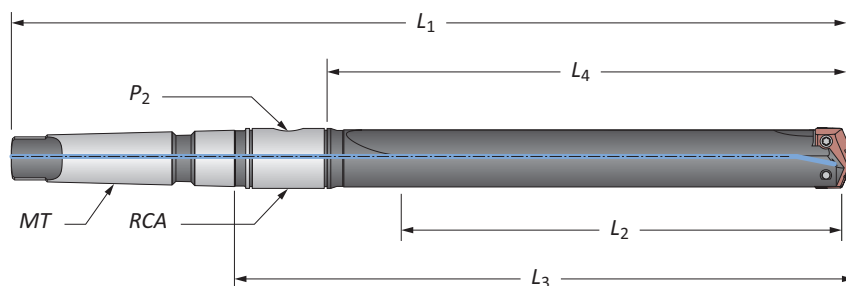


### Straight Flute

	Body				Shank			Part No.	
	Length	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>		RCA
m	Short	120.6	152.4	206.4	319.1	#4**	1/4*	2T-4SRM	22030S-004M
	Extended	349.3	381.0	435.0	547.7	#4**	1/4*	2T-4SRM	▲ 25030S-004M
	XL	558.8	590.6	644.6	757.2	#4**	1/4*	2T-4SRM	▲ 27030S-004M
	3XL	787.4	819.2	873.2	985.8	#4**	1/4*	2T-4SRM	▲ 29030S-004M
i	Short	4-3/4	6	8-1/8	12-9/16	#4	1/4	2T-4SR	22030S-004I
	Short	4-3/4	6	8-1/8	13-13/16	#5	1/4	2T-5SR	22030S-005I
	Intermediate	6-1/2	7-3/4	9-7/8	14-5/16	#4	1/4	2T-4SR	23030S-004I
	Standard	8-1/4	9-1/2	11-5/8	16-1/16	#4	1/4	2T-4SR	24030S-004I
	Standard	8-1/4	9-1/2	11-5/8	17-5/16	#5	1/4	2T-5SR	24030S-005I
	Extended	13-3/4	15	17-1/8	21-9/16	#4	1/4	2T-4SR	▲ 25030S-004I
	XL	22	22-1/4	25-3/8	29-13/16	#4	1/4	2T-4SR	▲ 27030S-004I
	3XL	31	32-1/4	34-3/8	38-13/16	#4	1/4	2T-4SR	▲ 29030S-004I

\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

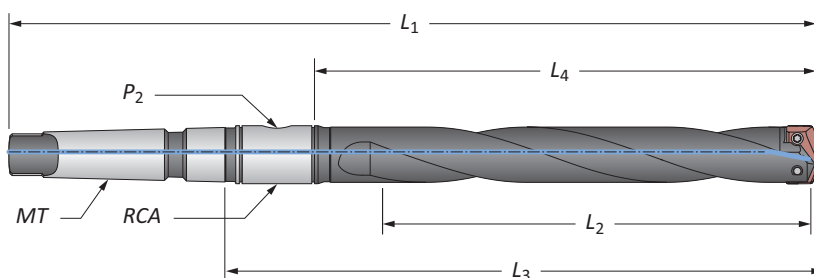

### Helical Flute


	Body				Shank			Part No.	
	Length	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>		RCA
m	Intermediate	165.1	196.9	250.9	363.6	#4**	1/4*	2T-4SRM	23030H-004M
	Standard	209.5	241.3	295.3	408.0	#4**	1/4*	2T-4SRM	24030H-004M

\*Metric thread to BSP and ISO 7-1 | \*\*Per ISO 296 type BEK

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7514-IP20-1	7514N-IP20-1	8IP-20	-	-	1370 N-cm (121.3 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



m = Metric (mm)


i = Imperial (in)

Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

3 Series | Straight Shank | Diameter Range: 34.36 mm - 47.80 mm (1.353" - 1.882")

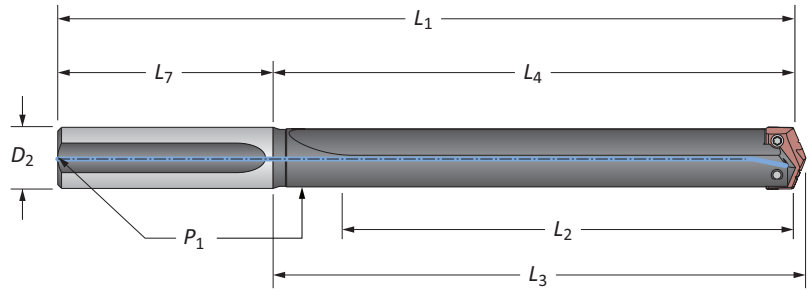

### Straight Flute


Length	Body				Shank			Part No.
	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
Short	4-3/4	6	6-3/16	10	1-1/4	4	1/4	22030S-125L
Short	4-3/4	6	6-3/16	10	1-1/2	4	1/4	22030S-150L
Intermediate	6-1/2	7-3/4	7-15/16	11-3/4	1-1/2	4	1/4	23030S-150L
Standard	8-1/4	9-1/2	9-11/16	13-1/2	1-1/4	4	1/4	24030S-125L
Standard	8-1/4	9-1/2	9-11/16	13-1/2	1-1/2	4	1/4	24030S-150L
Extended	13-3/4	15-3/16	15-3/16	19	1-1/4	4	1/4	⚠ 25030S-125L
XL	22	23-7/16	23-7/16	27-1/4	1-1/2	4	1/4	⚠ 27030S-150L
3XL	31	32-7/16	32-7/16	36-1/4	1-1/2	4	1/4	⚠ 29030S-150L

## T-A Drill Accessories

3 Series | Rotary Coolant Adapters | Torx® Plus Screws

### Rotary Coolant Adapter (RCA) and Accessories

ID	OD	L <sub>1</sub>	Driving Rod Thread	P <sub>1</sub>	Part No.	RCA O-Rings	
						Kit Part No.**	Replacements
31.75	63.50	34.92	M10 x 1.50	1/4*	⚠ 2T-4SRM	2T1-4SR	2T1-4OR-10
44.45	76.20	34.92	M10 x 1.50	1/4*	⚠ 2T-5SRM	2T1-5SR	2T1-5OR-10
1-1/4	2-1/2	1-3/8	3/8-16	1/4	⚠ 2T-4SR	2T1-4SR	2T1-4OR-10
1-3/4	3	1-3/8	3/8-16	1/4	⚠ 2T-5SR	2T1-5SR	2T1-5OR-10

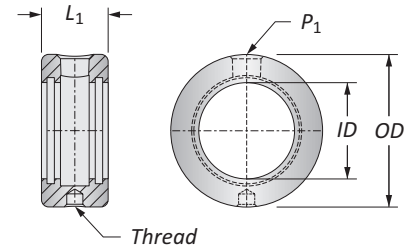

\*Thread to BSP and ISO 7-1


\*\*RCA Repair Kit includes (2) O-rings, (2) snap rings, and (2) thrust washers

⚠ Refer to page A30: 110 for proper RCA assembly and safety information

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7514-IP20-1	7514N-IP20-1	8IP-20	-	-	1370 N-cm (121.3 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



Ⓜ = Metric (mm)


Ⓢ = Imperial (in)

Inserts sold separately  
Screws sold in packs of 10  
O-rings sold in packs of 10



**⚠ WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## GEN2 T-A Drill Inserts




4 Series | HSS | Diameter Range: 46.99 mm - 65.28 mm (1.850" - 2.570")

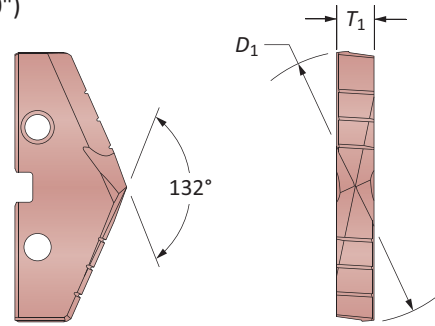

### HSS Inserts – Super Cobalt

Insert				Part No.	
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200®	 TiN
48.00	1.8898	–	7.94	454H-48	454T-48
48.42	1.9063	1-29/32	7.94	454H-0129	454T-0129
49.00	1.9291	–	7.94	454H-49	454T-49
49.21	1.9375	1-15/16	7.94	454H-0130	454T-0130
50.00	1.9685	–	7.94	454H-50	454T-50
50.01	1.9688	1-31/32	7.94	454H-0131	454T-0131
50.80	2.0000	2	7.94	454H-0200	454T-0200
51.00	2.0079	–	7.94	454H-51	454T-51
51.59	2.0313	2-1/32	7.94	454H-0201	454T-0201
52.00	2.0472	2-3/64	7.94	454H-52	454T-52
52.39	2.0625	2-1/16	7.94	454H-0202	454T-0202
53.00	2.0866	–	7.94	454H-53	454T-53
53.18	2.0938	2-3/32	7.94	454H-0203	454T-0203
53.98	2.1250	2-1/8	7.94	454H-0204	454T-0204
54.00	2.1260	–	7.94	454H-54	454T-54
54.77	2.1563	2-5/32	7.94	454H-0205	454T-0205
55.00	2.1654	–	7.94	454H-55	454T-55
55.56	2.1875	2-3/16	7.94	454H-0206	454T-0206
56.00	2.2047	–	7.94	454H-56	454T-56
56.36	2.2188	2-7/32	7.94	454H-0207	454T-0207
57.00	2.2441	–	7.94	454H-57	454T-57
57.15	2.2500	2-1/4	7.94	454H-0208	454T-0208
57.94	2.2813	2-9/32	7.94	454H-0209	454T-0209
58.00	2.2835	–	7.94	454H-58	454T-58
58.74	2.3125	2-5/16	7.94	454H-0210	454T-0210
59.00	2.3228	–	7.94	454H-59	454T-59
59.53	2.3438	2-11/32	7.94	454H-0211	454T-0211
60.00	2.3622	–	7.94	454H-60	454T-60
60.33	2.3750	2-3/8	7.94	454H-0212	454T-0212
61.00	2.4016	–	7.94	454H-61	454T-61
61.12	2.4063	2-13/32	7.94	454H-0213	454T-0213
61.91	2.4375	2-7/16	7.94	454H-0214	454T-0214
62.00	2.4409	–	7.94	454H-62	454T-62
62.71	2.4688	2-15/32	7.94	454H-0215	454T-0215
63.00	2.4803	–	7.94	454H-63	454T-63
63.50	2.5000	2-1/2	7.94	454H-0216	454T-0216
64.00	2.5197	–	7.94	454H-64	454T-64
64.29	2.5313	2-17/32	7.94	454H-0217	454T-0217
65.00	2.5591	–	7.94	454H-65	454T-65
65.09	2.5625	2-9/16	7.94	454H-0218	454T-0218

Inserts sold in quantities of 1




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →


TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX




### GEN2 T-A Drill Inserts


4 Series | HSS | Diameter Range: 46.99 mm - 65.28 mm (1.850" - 2.570")

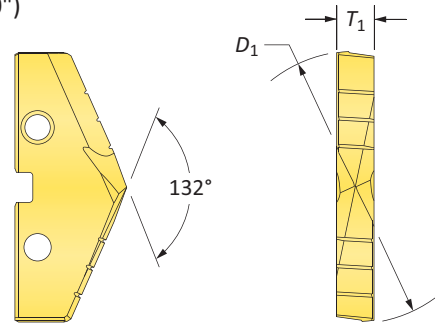

HSS Inserts – HSS

Insert				Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN
48.00	1.8898	–	7.94	434T-48
48.42	1.9063	1-29/32	7.94	434T-0129
49.00	1.9291	–	7.94	434T-49
49.21	1.9375	1-15/16	7.94	434T-0130
50.00	1.9685	–	7.94	434T-50
50.01	1.9688	1-31/32	7.94	434T-0131
50.80	2.0000	2	7.94	434T-0200
51.00	2.0079	–	7.94	434T-51
51.59	2.0313	2-1/32	7.94	434T-0201
52.00	2.0472	2-3/64	7.94	434T-52
52.39	2.0625	2-1/16	7.94	434T-0202
53.00	2.0866	–	7.94	434T-53
53.18	2.0938	2-3/32	7.94	434T-0203
53.98	2.1250	2-1/8	7.94	434T-0204
54.00	2.1260	–	7.94	434T-54
54.77	2.1563	2-5/32	7.94	434T-0205
55.00	2.1654	–	7.94	434T-55
55.56	2.1875	2-3/16	7.94	434T-0206
56.00	2.2047	–	7.94	434T-56
56.36	2.2188	2-7/32	7.94	434T-0207
57.00	2.2441	–	7.94	434T-57
57.15	2.2500	2-1/4	7.94	434T-0208
57.94	2.2813	2-9/32	7.94	434T-0209
58.00	2.2835	–	7.94	434T-58
58.74	2.3125	2-5/16	7.94	434T-0210
59.00	2.3228	–	7.94	434T-59
59.53	2.3438	2-11/32	7.94	434T-0211
60.00	2.3622	–	7.94	434T-60
60.33	2.3750	2-3/8	7.94	434T-0212
61.00	2.4016	–	7.94	434T-61
61.12	2.4063	2-13/32	7.94	434T-0213
61.91	2.4375	2-7/16	7.94	434T-0214
62.00	2.4409	–	7.94	434T-62
62.71	2.4688	2-15/32	7.94	434T-0215
63.00	2.4803	–	7.94	434T-63
63.50	2.5000	2-1/2	7.94	434T-0216
64.00	2.5197	–	7.94	434T-64
64.29	2.5313	2-17/32	7.94	434T-0217
65.00	2.5591	–	7.94	434T-65
65.09	2.5625	2-9/16	7.94	434T-0218



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 


Inserts sold in quantities of 1

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX


A  
DRILLING  
B  
BORING  
C  
REAMING  
D  
BURNISHING  
E  
THREADING  
X  
SPECIALS

## T-A Drill Inserts

4 Series | HSS | Diameter Range: 46.99 mm - 65.28 mm (1.850" - 2.570")

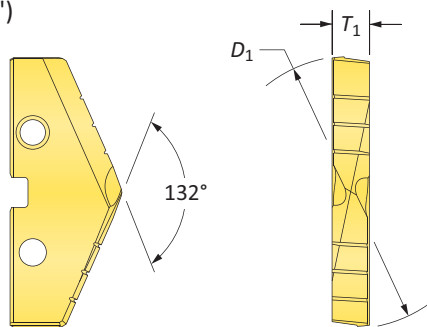

### HSS Inserts – Super Cobalt



Insert				Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	TiN 
48.00	1.8898	–	7.94	154T-48
48.42	1.9063	1-29/32	7.94	154T-0129
49.00	1.9291	–	7.94	154T-49
49.21	1.9375	1-15/16	7.94	154T-0130
50.00	1.9685	–	7.94	154T-50
50.01	1.9688	1-31/32	7.94	154T-0131
50.80	2.0000	2	7.94	154T-0200
51.00	2.0079	–	7.94	154T-51
51.59	2.0313	2-1/32	7.94	154T-0201
52.00	2.0472	2-3/64	7.94	154T-52
52.39	2.0625	2-1/16	7.94	154T-0202
53.00	2.0866	–	7.94	154T-53
53.18	2.0938	2-3/32	7.94	154T-0203
53.98	2.1250	2-1/8	7.94	154T-0204
54.00	2.1260	–	7.94	154T-54
54.77	2.1563	2-5/32	7.94	154T-0205
55.00	2.1654	–	7.94	154T-55
55.56	2.1875	2-3/16	7.94	154T-0206
56.00	2.2047	–	7.94	154T-56
56.36	2.2188	2-7/32	7.94	154T-0207
57.00	2.2441	–	7.94	154T-57
57.15	2.2500	2-1/4	7.94	154T-0208
57.94	2.2813	2-9/32	7.94	154T-0209
58.00	2.2835	–	7.94	154T-58
58.74	2.3125	2-5/16	7.94	154T-0210
59.00	2.3228	–	7.94	154T-59
59.53	2.3438	2-11/32	7.94	154T-0211
60.00	2.3622	–	7.94	154T-60
60.33	2.3750	2-3/8	7.94	154T-0212
61.00	2.4016	–	7.94	154T-61
61.12	2.4063	2-13/32	7.94	154T-0213
61.91	2.4375	2-7/16	7.94	154T-0214
62.00	2.4409	–	7.94	154T-62
62.71	2.4688	2-15/32	7.94	154T-0215
63.00	2.4803	–	7.94	154T-63
63.50	2.5000	2-1/2	7.94	154T-0216
64.00	2.5197	–	7.94	154T-64
64.29	2.5313	2-17/32	7.94	154T-0217
65.00	2.5591	–	7.94	154T-65
65.09	2.5625	2-9/16	7.94	154T-0218

Inserts sold in quantities of 1

A30: 112 - 143

A30: 90 - 92

A30: 4 - 6



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →


TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

### T-A Drill Inserts


4 Series | HSS | Diameter Range: 46.99 mm - 65.28 mm (1.850" - 2.570")






Flat Bottom

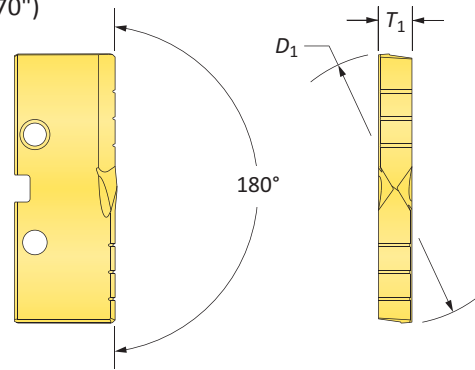


#### HSS Inserts – Super Cobalt

Insert				Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN
48.00	1.8898	-	7.94	154T-48-FB
48.42	1.9063	1-29/32	7.94	154T-0129-FB
49.00	1.9291	-	7.94	154T-49-FB
49.21	1.9375	1-15/16	7.94	154T-0130-FB
50.00	1.9685	-	7.94	154T-50-FB
50.01	1.9688	1-31/32	7.94	154T-0131-FB
50.80	2.0000	2	7.94	154T-0200-FB
51.00	2.0079	-	7.94	154T-51-FB
51.59	2.0313	2-1/32	7.94	154T-0201-FB
52.00	2.0472	2-3/64	7.94	154T-52-FB
52.39	2.0625	2-1/16	7.94	154T-0202-FB
53.00	2.0866	-	7.94	154T-53-FB
53.18	2.0938	2-3/32	7.94	154T-0203-FB
53.98	2.1250	2-1/8	7.94	154T-0204-FB
54.00	2.1260	-	7.94	154T-54-FB
54.77	2.1563	2-5/32	7.94	154T-0205-FB
55.00	2.1654	-	7.94	154T-55-FB
55.56	2.1875	2-3/16	7.94	154T-0206-FB
56.00	2.2047	-	7.94	154T-56-FB
56.36	2.2188	2-7/32	7.94	154T-0207-FB
57.00	2.2441	-	7.94	154T-57-FB
57.15	2.2500	2-1/4	7.94	154T-0208-FB
57.94	2.2813	2-9/32	7.94	154T-0209-FB
58.00	2.2835	-	7.94	154T-58-FB
58.74	2.3125	2-5/16	7.94	154T-0210-FB
59.00	2.3228	-	7.94	154T-59-FB
59.53	2.3438	2-11/32	7.94	154T-0211-FB
60.00	2.3622	-	7.94	154T-60-FB
60.33	2.3750	2-3/8	7.94	154T-0212-FB
61.00	2.4016	-	7.94	154T-61-FB
61.12	2.4063	2-13/32	7.94	154T-0213-FB
61.91	2.4375	2-7/16	7.94	154T-0214-FB
62.00	2.4409	-	7.94	154T-62-FB
62.71	2.4688	2-15/32	7.94	154T-0215-FB
63.00	2.4803	-	7.94	154T-63-FB
63.50	2.5000	2-1/2	7.94	154T-0216-FB
64.00	2.5197	-	7.94	154T-64-FB
64.29	2.5313	2-17/32	7.94	154T-0217-FB
65.00	2.5591	-	7.94	154T-65-FB
65.09	2.5625	2-9/16	7.94	154T-0218-FB



Inserts sold in quantities of 1


Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. 

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX



## T-A Drill Insert Holders


4 Series | Flange Shank | Diameter Range: 46.99 mm - 65.28 mm (1.850" - 2.570")

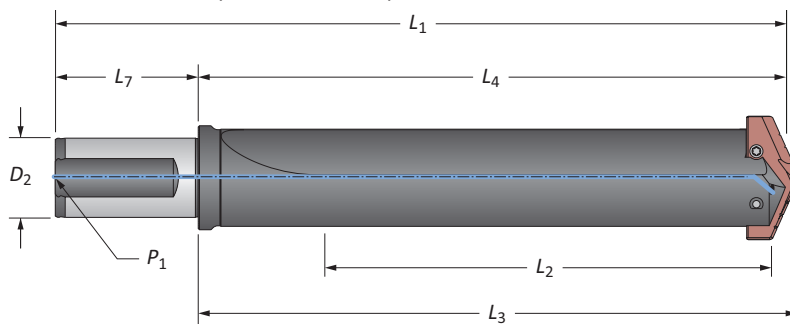

### Straight Flute

Length	Body				Shank			Part No.
	$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
Short	130.2	179.4	184.0	249.4	40.0	70.0	1/4*	22040S-40FM
Extended	422.3	471.5	476.0	541.5	40.0	70.0	1/4*	25040S-40FM
XL	625.0	674.7	679.0	744.7	40.0	70.0	1/4*	27040S-40FM
3XL	879.0	928.7	933.0	998.7	40.0	70.0	1/4*	29040S-40FM
Short	5-1/8	7-1/6	7-1/4	9-3/4	1-1/2	2-11/16	1/4	22040S-150F
Standard	9-1/8	11-1/16	11-1/4	13-3/4	1-1/2	2-11/16	1/4	24040S-150F

\*Metric thread to BSP and ISO 7-1

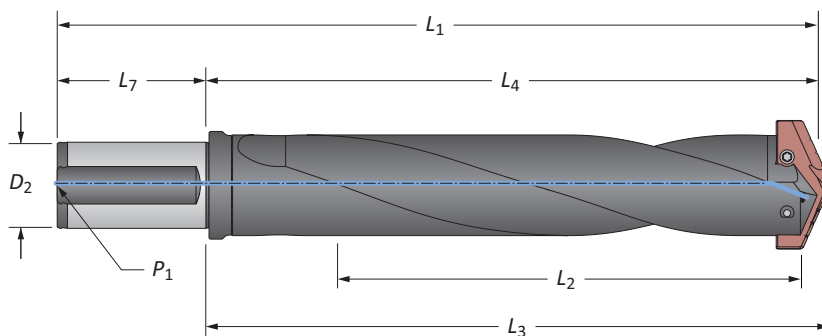

### Helical Flute

Length	Body				Shank			Part No.
	$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
Standard	231.8	281.0	285.8	351.0	40.0	70.0	1/4*	24040H-40FM
Standard	9-1/8	11-1/16	11-1/4	13-3/4	1-1/2	2-11/16	1/4	24040H-150F


\*Metric thread to BSP and ISO 7-1

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7514-IP20-1	7514N-IP20-1	8IP-20	-	-	1370 N-cm (121.3 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 86 - 89



$\text{m}$  = Metric (mm)


$\text{i}$  = Imperial (in)

Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

4 Series | Taper Shank | Diameter Range: 46.99 mm - 65.28 mm (1.850" - 2.570")

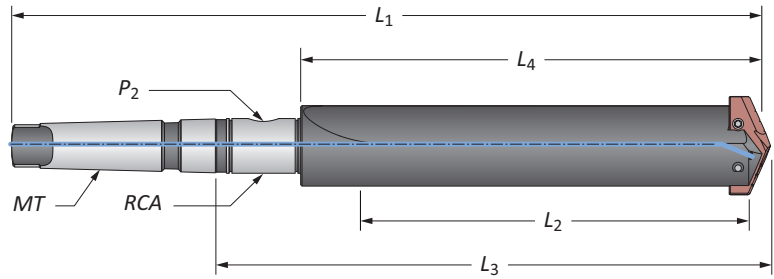


### Straight Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA	
M	Short	130.1	165.1	219.1	363.5	#5**	1/4*	2T-5SRM	22040S-005M
	Extended	422.3	457.2	511.2	655.6	#5**	1/4*	2T-5SRM	25040S-005M
	XL	625.0	660.4	714.4	858.8	#5**	1/4*	2T-5SRM	27040S-005M
	3XL	879.0	914.4	968.4	1112.8	#5**	1/4*	2T-5SRM	29040S-005M
I	Short	5-1/8	6-1/2	8-5/8	13-1/16	#4	1/4	2T-4SR	22040S-004I
	Short	5-1/8	6-1/2	8-5/8	14-5/16	#5	1/4	2T-5SR	22040S-005I
	Standard	9-1/8	10-1/2	12-5/8	17-1/16	#4	1/4	2T-4SR	24040S-004I
	Standard	9-1/8	10-1/2	12-5/8	18-5/16	#5	1/4	2T-5SR	24040S-005I
	Extended	16-5/8	18	20-1/8	25-13/16	#5	1/4	2T-5SR	25040S-005I
	XL	24-5/8	26	28-1/8	33-13/16	#5	1/4	2T-5SR	27040S-005I
	3XL	34-5/8	36	38-1/8	43-13/16	#5	1/4	2T-5SR	29040S-005I

\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

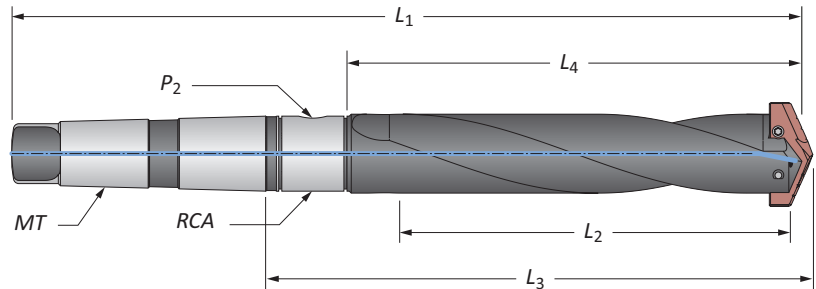

### Helical Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA	
M	Standard	231.8	266.7	320.7	465.1	#5**	1/4*	2T-5SRM	24040H-005M


\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7514-IP20-1	7514N-IP20-1	8IP-20	-	-	1370 N-cm (121.3 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



M = Metric (mm)


I = Imperial (in)

Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

4 Series | Straight Shank | Diameter Range: 46.99 mm - 65.28 mm (1.850" - 2.570")

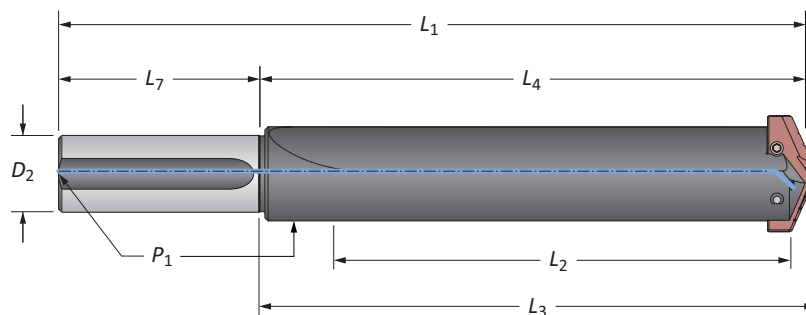

### Straight Flute


Length	Body				Shank			Part No.
	$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
Short	5-1/8	6-1/2	6-11/16	10-1/2	1-1/2	4	1/4	22040S-150L
Short	5-1/8	6-1/2	6-11/16	10-1/2	1-3/4	4	1/4	22040S-175L
Standard	9-1/8	10-1/2	10-11/16	14-1/2	1-1/2	4	1/4	24040S-150L
<b>i</b> Standard	9-1/8	10-1/2	10-11/16	14-1/2	1-3/4	4	1/4	24040S-175L
Extended	16-5/8	18	18-3/16	22	1-1/2	4	1/4	<b>⚠</b> 25040S-150L
XL	24-5/8	26	26-3/16	30	1-1/2	4	1/4	<b>⚠</b> 27040S-150L
3XL	34-5/8	36	36-3/16	40	1-1/2	4	1/4	<b>⚠</b> 29040S-150L

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7514-IP20-1	7514N-IP20-1	8IP-20	-	-	1370 N-cm (121.3 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 86 - 89



**m** = Metric (mm)

**i** = Imperial (in)





Screws sold in quantities of 10


**⚠ WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Accessories

4 Series | Rotary Coolant Adapters | Torx® Plus Screws


### Rotary Coolant Adapter (RCA) and Accessories

ID	OD	L <sub>1</sub>	Driving Rod Thread	P <sub>1</sub>	Part No.	RCA O-Rings		
						Kit Part No.**	Replacements	
m	31.75	63.50	34.92	M10 x 1.50	1/4*	 2T-4SRM	2T1-4SR	2T1-4OR-10
	44.45	76.20	34.92	M10 x 1.50	1/4*	 2T-5SRM	2T1-5SR	2T1-5OR-10
i	1-1/4	2-1/2	1-3/8	3/8-16	1/4	 2T-4SR	2T1-4SR	2T1-4OR-10
	1-3/4	3	1-3/8	3/8-16	1/4	 2T-5SR	2T1-5SR	2T1-5OR-10

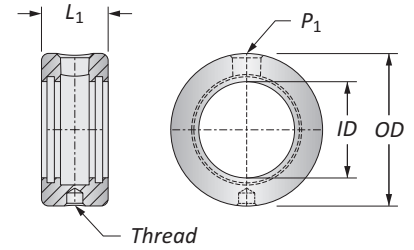






\*Thread to BSP and ISO 7-1


\*\*RCA Repair Kit includes (2) O-rings, (2) snap rings, and (2) thrust washers

 Refer to page A30: 110 for proper RCA assembly and safety information

### Connection Accessories


 Insert Screws	 Nylon Locking Screws	 Insert Driver	 Preset Torque Hand Driver	 Replacement Tips	Admissible Tightening Torque*
7514-IP20-1	7514N-IP20-1	8IP-20	-	-	1370 N-cm (121.3 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength





m = Metric (mm)  
i = Imperial (in)

Inserts sold separately  
Screws sold in packs of 10  
O-rings sold in packs of 10

 **WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

**GEN2 T-A Drill Inserts**

5 Series | HSS | Diameter Range: 62.38 mm - 76.20 mm (2.456" - 3.000")

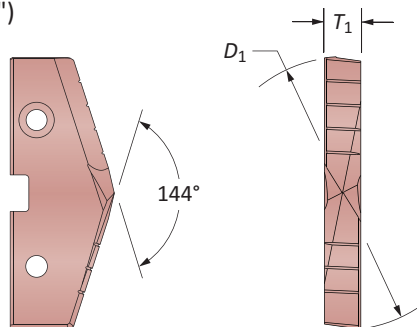

HSS Inserts – Super Cobalt | HSS

Insert				Super Cobalt Part No.	HSS Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	AM200®	TiN
63.50	2.5000	2-1/2	11.11	455H-0216	435T-0216
64.00	2.5197	-	11.11	455H-64	435T-64
64.29	2.5313	2-17/32	11.11	455H-0217	435T-0217
65.09	2.5625	2-9/16	11.11	455H-0218	435T-0218
65.88	2.5938	2-19/32	11.11	455H-0219	435T-0219
66.00	2.5984	-	11.11	455H-66	435T-66
66.68	2.6250	2-5/8	11.11	455H-0220	435T-0220
67.47	2.6563	2-21/32	11.11	455H-0221	435T-0221
68.00	2.6772	-	11.11	455H-68	435T-68
68.26	2.6875	2-11/16	11.11	455H-0222	435T-0222
69.05	2.7188	2-23/32	11.11	455H-0223	435T-0223
69.85	2.7500	2-3/4	11.11	455H-0224	435T-0224
70.00	2.7559	-	11.11	455H-70	435T-70
70.64	2.7813	2-25/32	11.11	455H-0225	435T-0225
71.44	2.8125	2-13/16	11.11	455H-0226	435T-0226
72.00	2.8346	-	11.11	455H-72	435T-72
72.23	2.8438	2-27/32	11.11	455H-0227	435T-0227
73.03	2.8750	2-7/8	11.11	455H-0228	435T-0228
73.82	2.9063	2-29/32	11.11	455H-0229	435T-0229
74.00	2.9134	-	11.11	455H-74	435T-74
74.41	2.9375	2-15/16	11.11	455H-0230	435T-0230
75.61	2.9688	2-31/32	11.11	455H-0231	435T-0231
76.00	2.9921	-	11.11	455H-76	435T-76
76.20	3.0000	3	11.11	455H-0300	435T-0300

BORING  
REAMING  
BURNISHING  
THREADING

SPECIALS

A30: 112 - 143 A30: 98 - 100 A30: 4 - 6 HI, HR, CR, SK, BR, CI, NC, WC


Coatings not listed above can be supplied as non-stocked standards. Process fees may apply.

Inserts sold in quantities of 1

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

### T-A Drill Inserts




5 Series | HSS | Diameter Range: 62.38 mm - 76.20 mm (2.456" - 3.000")

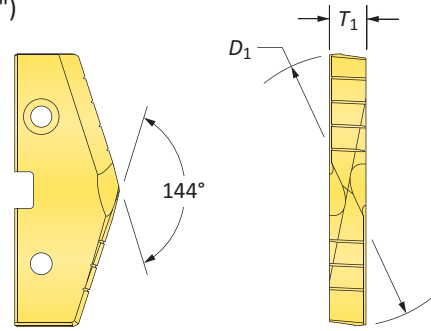

HSS Inserts – Super Cobalt | HSS

Insert				Super Cobalt Part No.*	HSS Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	TiN	TiN
63.50	2.5000	2-1/2	11.11	155T-0216	135T-0216
64.00	2.5197	-	11.11	155T-64	135T-64
64.29	2.5313	2-17/32	11.11	155T-0217	135T-0217
65.09	2.5625	2-9/16	11.11	155T-0218	135T-0218
65.88	2.5938	2-19/32	11.11	155T-0219	135T-0219
66.00	2.5984	-	11.11	155T-66	135T-66
66.68	2.6250	2-5/8	11.11	155T-0220	135T-0220
67.47	2.6563	2-21/32	11.11	155T-0221	135T-0221
68.00	2.6772	-	11.11	155T-68	135T-68
68.26	2.6875	2-11/16	11.11	155T-0222	135T-0222
69.05	2.7188	2-23/32	11.11	155T-0223	135T-0223
69.85	2.7500	2-3/4	11.11	155T-0224	135T-0224
70.00	2.7559	-	11.11	155T-70	135T-70
70.64	2.7813	2-25/32	11.11	155T-0225	135T-0225
71.44	2.8125	2-13/16	11.11	155T-0226	135T-0226
72.00	2.8346	-	11.11	155T-72	135T-72
72.23	2.8438	2-27/32	11.11	155T-0227	135T-0227
73.03	2.8750	2-7/8	11.11	155T-0228	135T-0228
73.82	2.9063	2-29/32	11.11	155T-0229	135T-0229
74.00	2.9134	-	11.11	155T-74	135T-74
74.41	2.9375	2-15/16	11.11	155T-0230	135T-0230
75.61	2.9688	2-31/32	11.11	155T-0231	135T-0231
76.00	2.9921	-	11.11	155T-76	135T-76
76.20	3.0000	3	11.11	155T-0300	135T-0300

\*Available as non-stocked standard



Inserts sold in quantities of 1



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX



## GEN2 T-A Drill Inserts

6 Series | HSS | Diameter Range: 76.22 mm - 89.08 mm (3.001" - 3.507")

(for use with 5 series holders)


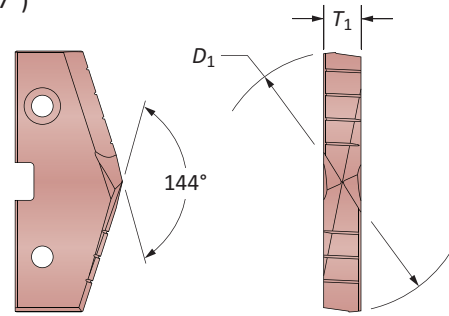



HSS Inserts – Super Cobalt | HSS

Insert				Super Cobalt Part No.	HSS Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200®	 TiN
76.99	3.0313	3-1/32	11.11	456H-0301	436T-0301
77.79	3.0625	3-1/16	11.11	456H-0302	436T-0302
78.00	3.0709	–	11.11	456H-78	436T-78
78.58	3.0938	3-3/32	11.11	456H-0303	436T-0303
79.38	3.1250	3-1/8	11.11	456H-0304	436T-0304
80.00	3.1496	–	11.11	456H-80	436T-80
80.17	3.1563	3-5/32	11.11	456H-0305	436T-0305
80.96	3.1875	3-3/16	11.11	456H-0306	436T-0306
81.76	3.2188	3-7/32	11.11	456H-0307	436T-0307
82.00	3.2283	–	11.11	456H-82	436T-82
82.55	3.2500	3-1/4	11.11	456H-0308	436T-0308
83.34	3.2813	3-9/32	11.11	456H-0309	436T-0309
84.00	3.3071	–	11.11	456H-84	436T-84
84.14	3.3125	3-5/16	11.11	456H-0310	436T-0310
84.93	3.3438	3-11/32	11.11	456H-0311	436T-0311
85.73	3.3750	3-3/8	11.11	456H-0312	436T-0312
86.00	3.3858	–	11.11	456H-86	436T-86
86.52	3.4063	3-13/32	11.11	456H-0313	436T-0313
87.31	3.4375	3-7/16	11.11	456H-0314	436T-0314
88.00	3.4646	–	11.11	456H-88	436T-88
88.11	3.4688	3-15/32	11.11	456H-0315	436T-0315
88.90	3.5000	3-1/2	11.11	456H-0316	436T-0316

F  
THREADING

X  
SPECIALS



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →


Inserts sold in quantities of 1

TiN = 1C2YI-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX



### T-A Drill Inserts

6 Series | HSS | Diameter Range: 76.22 mm - 89.08 mm (3.001" - 3.507")  
 (for use with 5 series holders)

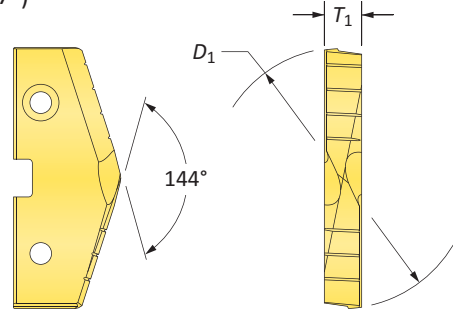

#### HSS Inserts – Super Cobalt | HSS

D <sub>1</sub> mm	D <sub>1</sub> inch	Fractional Equivalent	T <sub>1</sub>	Insert	
				Super Cobalt Part No.*	HSS Part No.
76.99	3.0313	3-1/32	11.11	TiN	TiN
77.79	3.0625	3-1/16	11.11	<b>156T-0302</b>	<b>136T-0302</b>
78.00	3.0709	-	11.11	<b>156T-78</b>	<b>136T-78</b>
78.58	3.0938	3-3/32	11.11	<b>156T-0303</b>	<b>136T-0303</b>
79.38	3.1250	3-1/8	11.11	<b>156T-0304</b>	<b>136T-0304</b>
80.00	3.1496	-	11.11	<b>156T-80</b>	<b>136T-80</b>
80.17	3.1563	3-5/32	11.11	<b>156T-0305</b>	<b>136T-0305</b>
80.96	3.1875	3-3/16	11.11	<b>156T-0306</b>	<b>136T-0306</b>
81.76	3.2188	3-7/32	11.11	<b>156T-0307</b>	<b>136T-0307</b>
82.00	3.2283	-	11.11	<b>156T-82</b>	<b>136T-82</b>
82.55	3.2500	3-1/4	11.11	<b>156T-0308</b>	<b>136T-0308</b>
83.34	3.2813	3-9/32	11.11	<b>156T-0309</b>	<b>136T-0309</b>
84.00	3.3071	-	11.11	<b>156T-84</b>	<b>136T-84</b>
84.14	3.3125	3-5/16	11.11	<b>156T-0310</b>	<b>136T-0310</b>
84.93	3.3438	3-11/32	11.11	<b>156T-0311</b>	<b>136T-0311</b>
85.73	3.3750	3-3/8	11.11	<b>156T-0312</b>	<b>136T-0312</b>
86.00	3.3858	-	11.11	<b>156T-86</b>	<b>136T-86</b>
86.52	3.4063	3-13/32	11.11	<b>156T-0313</b>	<b>136T-0313</b>
87.31	3.4375	3-7/16	11.11	<b>156T-0314</b>	<b>136T-0314</b>
88.00	3.4646	-	11.11	<b>156T-88</b>	<b>136T-88</b>
88.11	3.4688	3-15/32	11.11	<b>156T-0315</b>	<b>136T-0315</b>
88.90	3.5000	3-1/2	11.11	<b>156T-0316</b>	<b>136T-0316</b>

\*Available as non-stocked standard

A30: 112 - 143 A30: 98 - 100 A30: 4 - 6

HI, HR, CR, SK, BR, NC, WC, TC

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →


Inserts sold in quantities of 1

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

## T-A Drill Insert Holders

5 Series | Flange Shank | Diameter Range: 62.38 mm - 89.08 mm (2.456" - 3.507")

A  
DRILLING

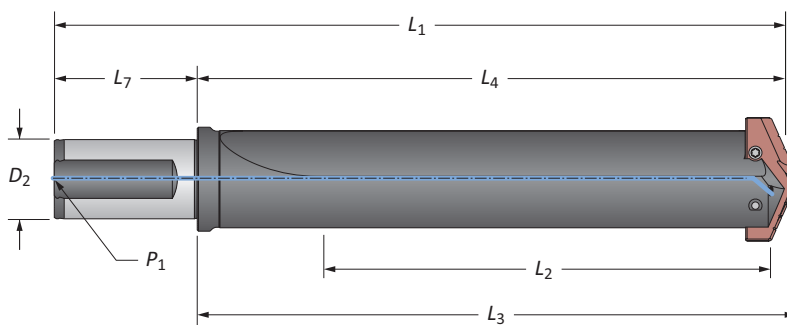


### Straight Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
<b>m</b>	Short	172	215.9	222.3	302.3	50.0	80.0	1/2*	<b>22050S-50FM</b>
	Extended	464	508	514.4	594.4	50.0	80.0	1/2*	<b>25050S-50FM</b>
<b>i</b>	Short	6-49/64	8-1/2	8-3/4	13-1/4	2	4-1/2	1/2	<b>22050S-200F</b>
	Extended	18-17/64	20	20-1/4	24-3/4	2	4-1/2	1/2	<b>25050S-200F</b>

\*Metric thread to BSP and ISO 7-1

C  
REAMING

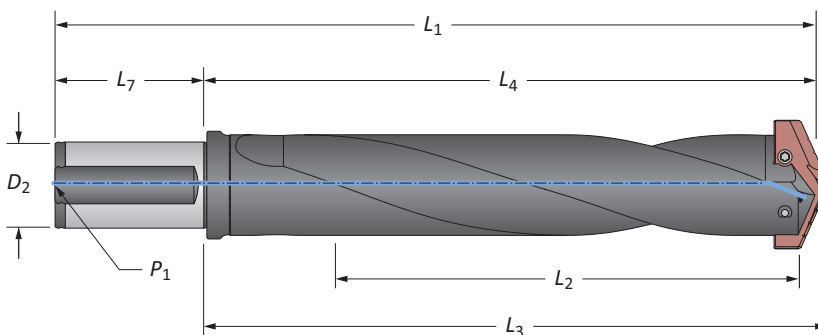

### Helical Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
<b>m</b>	Standard	273	317.5	323.9	403.9	50.0	80.0	1/2*	<b>24050H-50FM</b>
<b>i</b>	Standard	10-3/4	12-1/2	12-3/4	17-1/4	2	4-1/2	1/2	<b>24050H-200F</b>

\*Metric thread to BSP and ISO 7-1


F  
THREADING

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7619-IP25-1	-	8IP-25	-	-	1750 N-cm (155.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

X  
SPECIALS



**m** = Metric (mm)

**i** = Imperial (in)


Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.



## T-A Drill Insert Holders

5 Series | Taper Shank | Diameter Range: 62.38 mm - 89.08 mm (2.456" - 3.507")

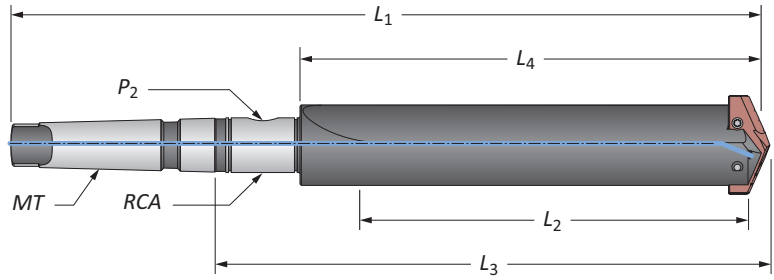


### Straight Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA	
m	Short	171.5	215.9	287.3	430.2	#5**	1/2*	2T-6SRM	22050S-005M
	Extended	463.6	508.0	579.4	722.3	#5**	1/2*	2T-6SRM	25050S-005M
	XL	660.0	704.8	776.2	919.1	#5**	1/2*	2T-6SRM	27050S-005M
	3XL	889.0	933.4	1004.8	1147.7	#5**	1/2*	2T-6SRM	29050S-005M
i	Short	6-3/4	8-1/2	11-5/16	16-15/16	#5	1/2	2T-6SR	22050S-005I
	Standard	10-3/4	12-1/2	15-5/16	20-15/16	#5	1/2	2T-6SR	24050S-005I
	Extended	18-1/4	20	22-13/16	28-7/16	#5	1/2	2T-6SR	25050S-005I
	XL	26	27-3/4	30-9/16	36-3/16	#5	1/2	2T-6SR	27050S-005I
	3XL	35	36-3/4	39-9/16	45-3/16	#5	1/2	2T-6SR	29050S-005I

\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

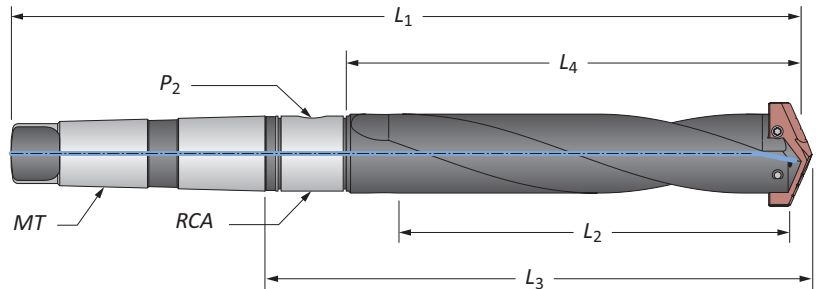

### Helical Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA	
m	Standard	273.1	317.5	388.9	531.8	#5**	1/2*	2T-6SRM	24050H-005M


\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7619-IP25-1	-	8IP-25	-	-	1750 N-cm (155.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



m = Metric (mm)

i = Imperial (in)


Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

### T-A Drill Insert Holders

5 Series | Straight Shank | Diameter Range: 62.38 mm - 89.08 mm (2.456" - 3.507")

A  
DRILLING

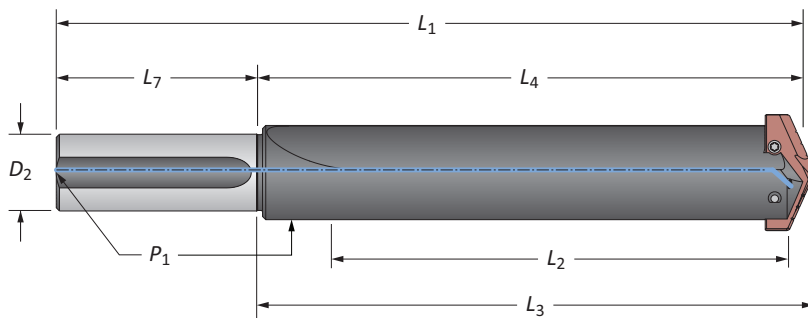

B  
BORING

#### Straight Flute

Length	Body				Shank			Part No.
	L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
Short	6-3/4	8-1/2	8-3/4	12-1/2	2	4	1/2	22050S-200L
Standard	10-3/4	12-1/2	12-3/4	16-1/2	2	4	1/2	24050S-200L
Extended	18-1/4	20	20-1/4	24	2	4	1/2	25050S-200L
XL	26	27-3/4	28	31-3/4	2	4	1/2	27050S-200L
3XL	35	36-3/4	37	40-3/4	2	4	1/2	29050S-200L

C  
REAMING

D  
BURNISHING

F  
THREADING


#### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7619-IP25-1	-	8IP-25	-	-	1750 N-cm (155.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

X  
SPECIALS

A30: 94 - 97



m = Metric (mm)

i = Imperial (in)

Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.




## T-A Drill Accessories

5/6 Series | Rotary Coolant Adapters | Torx® Plus Screws

### Rotary Coolant Adapter (RCA) and Accessories

	ID	OD	L <sub>1</sub>	Driving Rod Thread	P <sub>1</sub>	Part No.	RCA O-Rings	
							Kit Part No.**	Replacements
<b>m</b>	57.15	95.27	44.45	M12 x 1.75	1/2*	<b>⚠ 2T-6SRM</b>	2T1-6SR	2T1-6OR-10
<b>i</b>	2-1/4	3-3/4	1-3/4	1/2-13	1/2	<b>⚠ 2T-6SR</b>	2T1-6SR	2T1-6OR-10

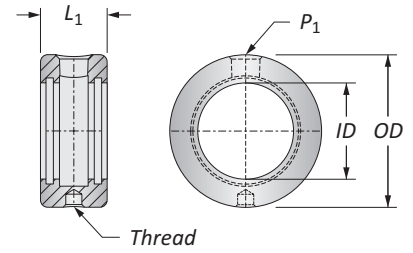

\*Thread to BSP and ISO 7-1


\*\*RCA Repair Kit includes (2) O-rings, (2) snap rings, and (2) thrust washers

**⚠** Refer to page A30: 110 for proper RCA assembly and safety information

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7619-IP25-1	-	8IP-25	-	-	1750 N-cm (155.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



**m** = Metric (mm)  
**i** = Imperial (in)

Inserts sold separately  
Screws sold in packs of 10  
O-rings sold in packs of 10

**⚠ WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

A

DRILLING

B

BORING

C

REAMING

D

BURNISHING

F



THREADING

X



SPECIALS

## GEN2 T-A Drill Inserts

7 Series | HSS | Diameter Range: 89.10 mm - 101.60 mm (3.508" - 4.000")


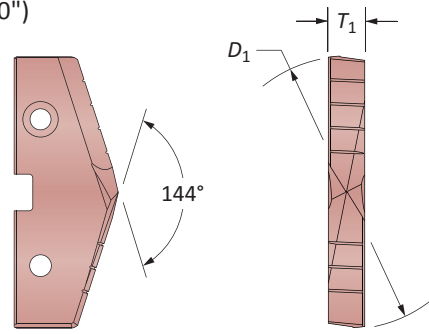



HSS Inserts – Super Cobalt | HSS

Insert				Super Cobalt Part No.	HSS Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200®	 TiN
89.69	3.5313	3-17/32	11.11	457H-0317	437T-0317
90.00	3.5433	–	11.11	457H-90	437T-90
90.49	3.5625	3-9/16	11.11	457H-0318	437T-0318
91.28	3.5938	3-19/32	11.11	457H-0319	437T-0319
92.00	3.6221	–	11.11	457H-92	437T-92
92.08	3.6250	3-5/8	11.11	457H-0320	437T-0320
92.87	3.6563	3-21/32	11.11	457H-0321	437T-0321
93.66	3.6875	3-11/16	11.11	457H-0322	437T-0322
94.00	3.7008	–	11.11	457H-94	437T-94
94.46	3.7188	3-23/32	11.11	457H-0323	437T-0323
95.25	3.7500	3-3/4	11.11	457H-0324	437T-0324
96.00	3.7795	–	11.11	457H-96	437T-96
96.04	3.7813	3-25/32	11.11	457H-0325	437T-0325
96.84	3.8125	3-13/16	11.11	457H-0326	437T-0326
97.63	3.8438	3-27/32	11.11	457H-0327	437T-0327
98.00	3.8583	–	11.11	457H-98	437T-98
98.43	3.8750	3-7/8	11.11	457H-0328	437T-0328
99.22	3.9063	3-29/32	11.11	457H-0329	437T-0329
100.00	3.9370	–	11.11	457H-100	437T-100
100.01	3.9375	3-15/16	11.11	457H-0330	437T-0330
100.81	3.9688	3-31/32	11.11	457H-0331	437T-0331
101.60	4.0000	4	11.11	457H-0400	437T-0400

F  
THREADING

X  
SPECIALS




Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX



Inserts sold in quantities of 1

### T-A Drill Inserts


7 Series | HSS | Diameter Range: 89.10 mm - 101.60 mm (3.508" - 4.000")

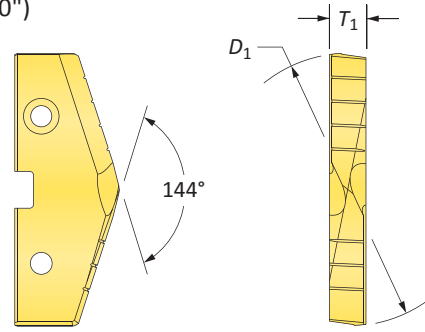



HSS Inserts – Super Cobalt | HSS

Insert				Super Cobalt Part No.*	HSS Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiN
89.69	3.5313	3-17/32	11.11	157T-0317	137T-0317
90.00	3.5433	–	11.11	157T-90	137T-90
90.49	3.5625	3-9/16	11.11	157T-0318	137T-0318
91.28	3.5938	3-19/32	11.11	157T-0319	137T-0319
92.00	3.6221	–	11.11	157T-92	137T-92
92.08	3.6250	3-5/8	11.11	157T-0320	137T-0320
92.87	3.6563	3-21/32	11.11	157T-0321	137T-0321
93.66	3.6875	3-11/16	11.11	157T-0322	137T-0322
94.00	3.7008	–	11.11	157T-94	137T-94
94.46	3.7188	3-23/32	11.11	157T-0323	137T-0323
95.25	3.7500	3-3/4	11.11	157T-0324	137T-0324
96.00	3.7795	–	11.11	157T-96	137T-96
96.04	3.7813	3-25/32	11.11	157T-0325	137T-0325
96.84	3.8125	3-13/16	11.11	157T-0326	137T-0326
97.63	3.8438	3-27/32	11.11	157T-0327	137T-0327
98.00	3.8583	–	11.11	157T-98	137T-98
98.43	3.8750	3-7/8	11.11	157T-0328	137T-0328
99.22	3.9063	3-29/32	11.11	157T-0329	137T-0329
100.00	3.9370	–	11.11	157T-100	137T-100
100.01	3.9375	3-15/16	11.11	157T-0330	137T-0330
100.81	3.9688	3-31/32	11.11	157T-0331	137T-0331
101.60	4.0000	4	11.11	157T-0400	137T-0400

\*Available as non-stocked standard

A30: 112 - 143  


A30: 106 - 108  


A30: 4 - 6  
 HI, HR, CR, SK, BR, NC, WC, TC

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

Inserts sold in quantities of 1


TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX





## GEN2 T-A Drill Inserts

8 Series | HSS | Diameter Range: 101.63 mm - 114.48 mm (4.001" - 4.507")


(for use with 7 series holders)

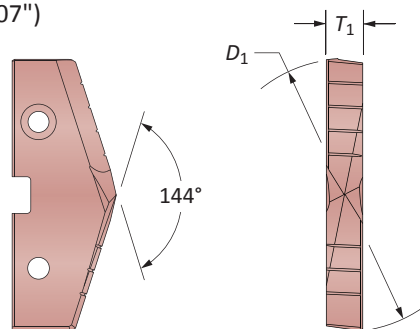

HSS Inserts – Super Cobalt | HSS

Insert				Super Cobalt Part No.	HSS Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 AM200®	 TiN
102.00	4.0157	4-1/64	11.11	458H-102	438T-102
103.19	4.0625	4-1/16	11.11	458H-0402	438T-0402
104.00	4.0945	4-3/32	11.11	458H-104	438T-104
104.75	4.1250	4-1/8	11.11	458H-0404	438T-0404
106.00	4.1732	–	11.11	458H-106	438T-106
106.36	4.1875	4-3/16	11.11	458H-0406	438T-0406
107.95	4.2500	4-1/4	11.11	458H-0408	438T-0408
108.00	4.2520	–	11.11	458H-108	438T-108
109.54	4.3125	4-5/16	11.11	458H-0410	438T-0410
110.00	4.3307	–	11.11	458H-110	438T-110
111.13	4.3750	4-3/8	11.11	458H-0412	438T-0412
112.00	4.4094	–	11.11	458H-112	438T-112
112.71	4.4375	4-7/16	11.11	458H-0414	438T-0414
114.00	4.4882	–	11.11	458H-114	438T-114
114.30	4.5000	4-1/2	11.11	458H-0416	438T-0416


A30: 112 - 143



A30: 106 - 108



A30: 4 - 6



HI, HR, CR, SK,  
BR, NC, WC

Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

Inserts sold in quantities of 1

TiN = 1C2YT-XXXX


TiAlN = 1C2YA-XXXX

TiCN = 1C2YN-XXXX



AM200® = 1C2YH-XXXX

### T-A Drill Inserts

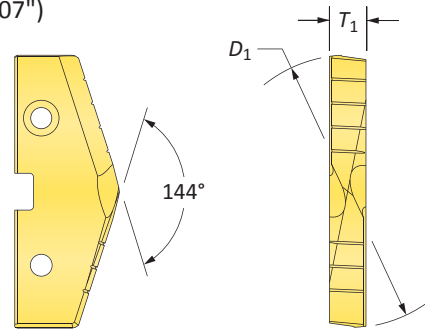8 Series | HSS | Diameter Range: 101.63 mm - 114.48 mm (4.001" - 4.507")  
(for use with 7 series holders)




#### HSS Inserts – Super Cobalt | HSS

Insert				Super Cobalt Part No.*	HSS Part No.
$D_1$ mm	$D_1$ inch	Fractional Equivalent	$T_1$	 TiN	 TiN
102.00	4.0157	4-1/64	11.11	158T-102	138T-102
103.19	4.0625	4-1/16	11.11	158T-0402	138T-0402
104.00	4.0945	4-3/32	11.11	158T-104	138T-104
104.75	4.1250	4-1/8	11.11	158T-0404	138T-0404
106.00	4.1732	-	11.11	158T-106	138T-106
106.36	4.1875	4-3/16	11.11	158T-0406	138T-0406
107.95	4.2500	4-1/4	11.11	158T-0408	138T-0408
108.00	4.2520	-	11.11	158T-108	138T-108
109.54	4.3125	4-5/16	11.11	158T-0410	138T-0410
110.00	4.3307	-	11.11	158T-110	138T-110
111.13	4.3750	4-3/8	11.11	158T-0412	138T-0412
112.00	4.4094	-	11.11	158T-112	138T-112
112.71	4.4375	4-7/16	11.11	158T-0414	138T-0414
114.00	4.4882	-	11.11	158T-114	138T-114
114.30	4.5000	4-1/2	11.11	158T-0416	138T-0416

\*Available as non-stocked standard




#### Double Wide (Oversized)\*\* – Super Cobalt

Insert			Super Cobalt Part No.*
$D_1$ mm	$D_1$ inch	$T_1$	 AM200®
110.00	4.3307	11.11	158H-110DW
120.00	4.7244	11.11	158H-120DW
125.00	4.9213	11.11	158H-125DW
130.00	5.1181	11.11	158H-130DW
140.00	5.5118	11.11	158H-140DW
150.00	5.9055	11.11	158H-150DW
160.00	6.2992	11.11	158H-160DW

\*\*Available as non-stocked standard.

Additional Diameters up to 200 mm available on request.  
120 mm maximum diameter for Stainless Steel

2 Piece Minimum Order Quantity



Coatings not listed above can be supplied as non-stocked standards. Process fees may apply. →

TiN = 1C2YT-XXXX	TiAlN = 1C2YA-XXXX
TiCN = 1C2YN-XXXX	AM200® = 1C2YH-XXXX

Inserts sold in quantities of 1

A

DRILLING

B

BORING

C

REAMING

D

BURNISHING

E

THREADING


X

SPECIALS

T-A Drill Insert Holders

7 Series | Flange Shank | Diameter Range: 89.10 mm - 101.60 mm (3.508" - 4.507")

A DRILLING

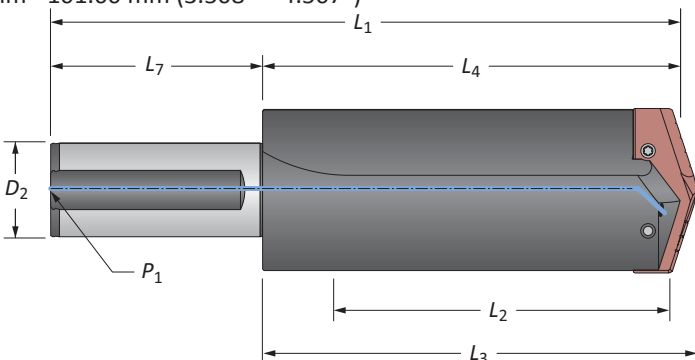


Straight Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
m	Short	172	225.4	231.8	311.8	50.0	80.0	1/2*	22070S-50FM
	Extended	556	606.9	616	696	50.0	80.0	1/2*	25070S-50FM
i	Short	6-49/64	8-7/8	9-1/8	13-5/8	2	4-1/2	1/2	22070S-200F
	Extended	21-57/64	23-57/64	24-1/4	27-3/4	2	4-1/2	1/2	25070S-200F

\*Metric thread to BSP and ISO 7-1

C REAMING

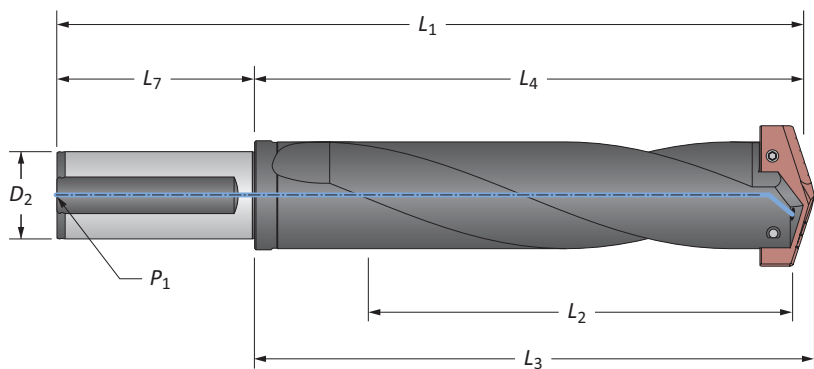

Helical Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	D <sub>2</sub>	L <sub>7</sub>	P <sub>1</sub>	
m	Standard	273	327	333.4	413.4	50.0	80.0	1/2*	24070H-50FM
i	Standard	10-3/4	12-7/8	13-1/8	17-5/8	2	4-1/2	1/2	24070H-200F

\*Metric thread to BSP and ISO 7-1


F THREADING

Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7619-IP25-1	-	8IP-25	-	-	1750 N-cm (155.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

X SPECIALS




m = Metric (mm)  
i = Imperial (in)

Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

7 Series | Taper Shank | Diameter Range: 89.10 mm - 101.60 mm (3.508" - 4.507")

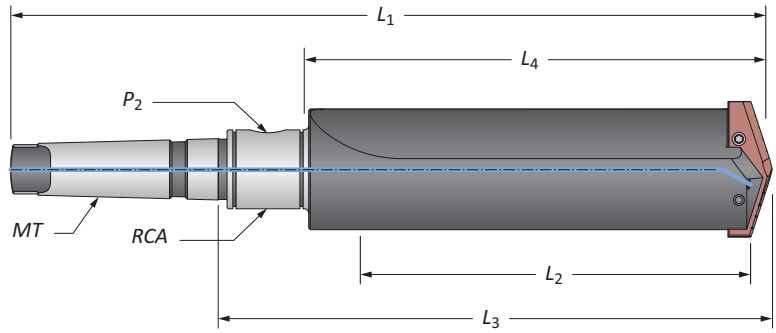


### Straight Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA	
<b>m</b>	Short	171.5	225.4	296.8	439.7	#5**	1/2*	2T-6SRM	22070S-005M
	Extended	555.6	609.6	681.1	823.9	#5**	1/2*	2T-6SRM	<b>25070S-005M</b>
	XL	685.0	739.7	811.2	954.0	#5**	1/2*	2T-6SRM	<b>27070S-005M</b>
	3XL	939.0	993.7	1065.2	1208.0	#5**	1/2*	2T-6SRM	<b>29070S-005M</b>
<b>i</b>	Short	6-3/4	8-7/8	11-11/16	17-5/16	#5	1/2	2T-6SR	22070S-005I
	Standard	10-3/4	12-7/8	15-11/16	21-5/16	#5	1/2	2T-6SR	24070S-005I
	Extended	21-7/8	24	26-13/16	32-7/16	#5	1/2	2T-6SR	<b>25070S-005I</b>
	XL	27	29-1/8	31-15/16	37-9/16	#5	1/2	2T-6SR	<b>27070S-005I</b>
	3XL	37	39-1/8	41-5/16	47-9/16	#5	1/2	2T-6SR	<b>29070S-005I</b>

\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

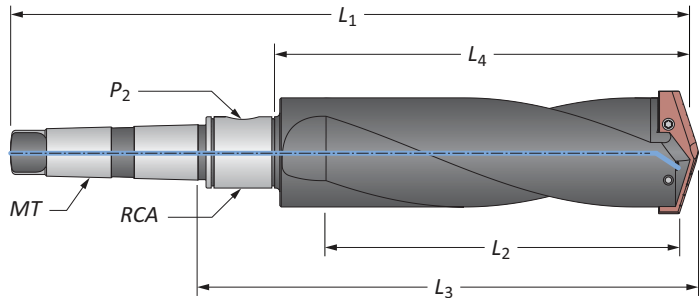

### Helical Flute

	Length	Body				Shank			Part No.
		L <sub>2</sub>	L <sub>4</sub>	L <sub>3</sub>	L <sub>1</sub>	MT	P <sub>2</sub>	RCA	
<b>m</b>	Standard	273.1	327.0	398.5	541.3	#5**	1/2*	2T-6SRM	24070H-005M


\*Metric thread to BSP and ISO 7-1

\*\*Per ISO 296 type BEK

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7619-IP25-1	-	8IP-25	-	-	1750 N-cm (155.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength



**m** = Metric (mm)


**i** = Imperial (in)

Screws sold in quantities of 10

**! WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Insert Holders

7 Series | Straight Shank | Diameter Range: 89.10 mm - 101.60 mm (3.508" - 4.507")

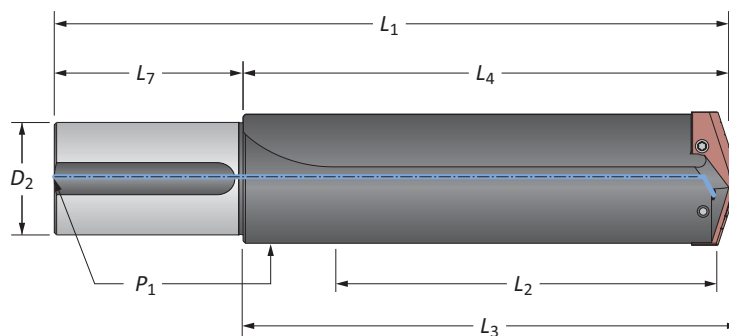

### Straight Flute


Length	Body				Shank			Part No.
	$L_2$	$L_4$	$L_3$	$L_1$	$D_2$	$L_7$	$P_1$	
Short	6-3/4	8-7/8	9-1/8	13-7/8	3	5	1/2	22070S-300L
Standard	10-3/4	12-7/8	13-1/8	17-7/8	3	5	1/2	24070S-300L
Extended	21-7/8	24	24-1/4	29	3	5	1/2	25070S-300L
XL	27	29-1/8	29-3/8	34-1/8	3	5	1/2	27070S-300L
3XL	37	39-1/8	39-3/8	44-1/8	3	5	1/2	29070S-300L

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7619-IP25-1	-	8IP-25	-	-	1750 N-cm (155.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength

A30: 102 - 105



= Metric (mm)

= Imperial (in)

Screws sold in quantities of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Drill Accessories

7/8 Series | Rotary Coolant Adapters | Torx® Plus Screws


### Rotary Coolant Adapter (RCA) and Accessories

ID	OD	L <sub>1</sub>	Driving Rod Thread	P <sub>1</sub>	Part No.	RCA O-Rings	
						Kit Part No.**	Replacements
57.15	95.27	44.45	M12 x 1.75	1/2*	2T-6SRM	2T1-6SR	2T1-6OR-10
2-1/4	3-3/4	1-3/4	1/2-13	1/2	2T-6SR	2T1-6SR	2T1-6OR-10

\*Thread to BSP and ISO 7-1

\*\*RCA Repair Kit includes (2) O-rings, (2) snap rings, and (2) thrust washers


Refer to page A30: 110 for proper RCA assembly and safety information

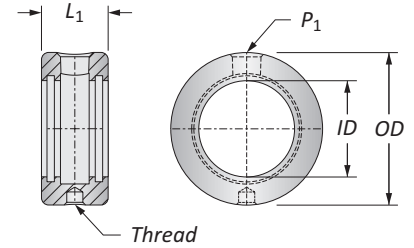

### Connection Accessories

Insert Screws	Nylon Locking Screws	Insert Driver	Preset Torque Hand Driver	Replacement Tips	Admissible Tightening Torque*
7619-IP25-1	-	8IP-25	-	-	1750 N-cm (155.0 in-lbs)

\*Tightening torques are calculated with a friction coefficient of  $\mu = 0.14$  and develop 90% of ultimate yield strength




= Metric (mm)  
 = Imperial (in)

Inserts sold separately  
 Screws sold in packs of 10  
 O-rings sold in packs of 10

**WARNING** Refer to Speed and Feed charts for recommended adjustments to speeds and feeds. Refer to page A30: 146 for deep hole drilling guidelines in this section of the catalogue. Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## Rotary Coolant Adapters (RCA)

Morse Taper Shanks

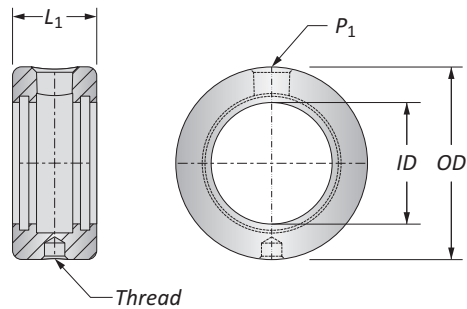


Holder Series	ID	OD	L <sub>1</sub>	Driving Rod Thread	P <sub>1</sub>	Part No.	Max Recommended RPM	RCA O-Rings		
								Kit Part No.**	Replacements	
M	Y, Z, 0	19.05	44.45	22.23	M8 x 1.25	1/8*	⚠ 2T-2SRM	3500	2T1-2SR	2T1-2OR-10
	1, 2	25.40	53.97	28.57	M8 x 1.25	1/8*	⚠ 2T-3SRM	2500	2T1-3SR	2T1-3OR-10
	2, 3, 4	31.75	63.50	34.92	M10 x 1.50	1/4*	⚠ 2T-4SRM	2000	2T1-4SR	2T1-4OR-10
	3, 4	44.45	76.20	34.92	M10 x 1.50	1/4*	⚠ 2T-5SRM	1500	2T1-5SR	2T1-5OR-10
	5, 7	57.15	95.27	44.45	M12 x 1.75	1/2*	⚠ 2T-6SRM	1100	2T1-6SR	2T1-6OR-10
I	Y, Z, 0	3/4	1-3/4	7/8	5/16 - 18	1/8	⚠ 2T-2SR	3500	2T1-2SR	2T1-2OR-10
	1, 2	1	2-1/8	1-1/8	5/16 - 18	1/8	⚠ 2T-3SR	2500	2T1-3SR	2T1-3OR-10
	2, 3, 4	1-1/4	2-1/2	1-3/8	3/8 - 16	1/4	⚠ 2T-4SR	2000	2T1-4SR	2T1-4OR-10
	3, 4	1-3/4	3	1-3/8	3/8 - 16	1/4	⚠ 2T-5SR	1500	2T1-5SR	2T1-5OR-10
	5, 7	2-1/4	3-3/4	1-3/4	1/2 - 13	1/2	⚠ 2T-6SR	1100	2T1-6SR	2T1-6OR-10

\*Thread to BSP and ISO 7-1

\*\*RCA Repair Kit includes (2) O-rings, (2) snap rings, and (2) thrust washers

**NOTE:** Max recommended pressure is 42 Bar (600 PSI)

**NOTE:** Recommendations above are based on water and oil based coolants

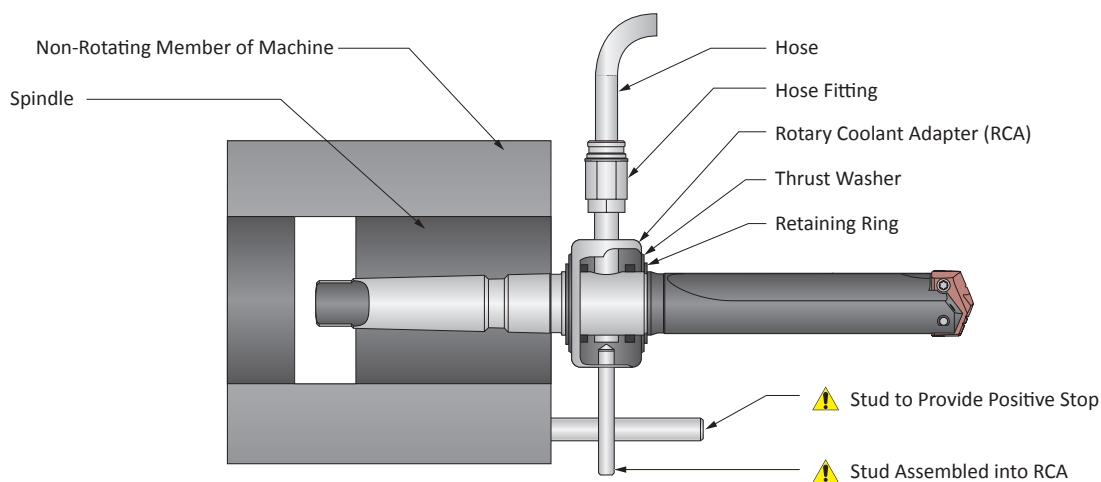

M = Metric (mm)

I = Imperial (in)


O-rings sold in packs of 10

**⚠ WARNING** RCA rotation during drilling can cause hose and/or hose fitting failure, machinery damage, and/or serious injury. To prevent, use RCA and positive stop studs when drilling. Factory technical assistance is also available for your specific applications.



## T-ACR 45 Chamfer Rings

### Straight Flute Holders

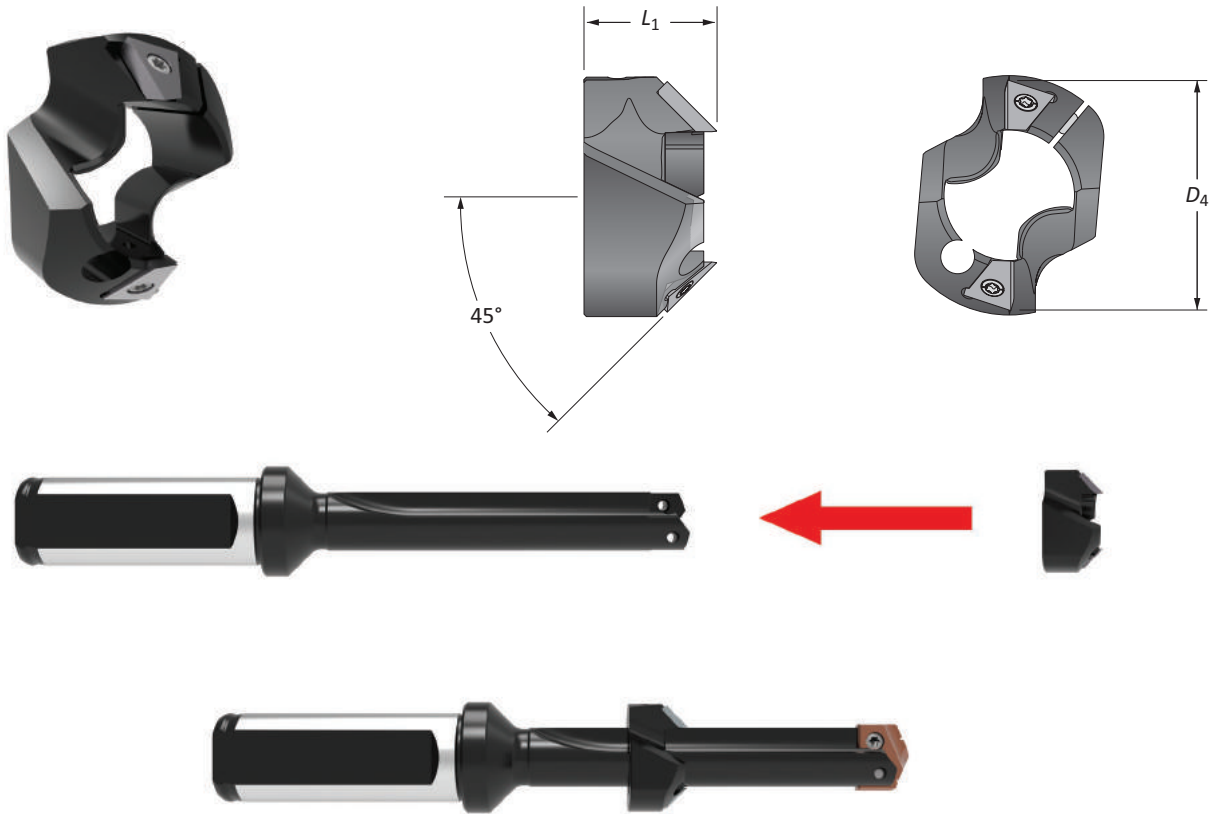

Holder Series	D <sub>1</sub> Range	Chamfer Ring		Part No.	Insert Part No.	Insert Screw	Insert Driver	Clamping Screw	Insert Driver
		D <sub>4</sub>	L <sub>1</sub>						
0	12.98 - 17.65	20.64	17.17	<b>T-ACR-45-0</b>	T-ACRI-45-B-C5A	7255-IP8-1	8IP-8	7375-IP9-1	8IP-9
1	17.53 - 24.38	26.59	20.24	<b>T-ACR-45-1</b>	T-ACRI-45-B-C5A	7255-IP8-1	8IP-8	7495-IP15-1	8IP-15
1.5	21.83 - 24.38	28.58	22.62	<b>T-ACR-45-1.5</b>	T-ACRI-45-B-C5A	7255-IP8-1	8IP-8	7495-IP15-1	8IP-15
2	24.41 - 35.05	39.69	25.40	<b>T-ACR-45-2</b>	T-ACRI-45-B-C5A	7255-IP8-1	8IP-8	7514-IP20-1	8IP-20

#### Highlights and Other Information

- Produces a 45° chamfer only
- Clamping screw allows for setting at any length along the flute
- Double effective cutting with face mounted inserts provides increased feed rates and greater insert strength
- The ring is balanced to match the holder center of gravity to ensure stability
- Inserts only available in C5 carbide and TiAlN coating
- Ideal for short-run or time-sensitive jobs that require quick delivery





**IMPORTANT:** T-A chamfer rings can only be used with straight flute T-A holders

Inserts sold in quantities of 2  
Screws sold in quantities of 10

**GEN2 T-A Recommended Drilling Data | Metric (mm)**

HSS Inserts

ISO	Material	Hardness (BHN)	HSS Grade	m/min		Feed Rate (mm/rev) by Diameter	
				 TiN	 AM200®	9.50 mm - 12.95 mm	12.98 mm - 17.52 mm
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	HSS	61	99	0.20	0.30
		150 - 200	HSS	55	91	0.18	0.28
		200 - 250	HSS	49	85	0.15	0.25
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	HSS	52	88	0.20 ❖	0.25
		125 - 175	HSS	49	83	0.18 ❖	0.25
		175 - 225	HSS	46	79	0.15 ❖	0.23
		225 - 275	HSS	43	73	0.13 ❖	0.23
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 175	HSS	49	83	0.18	0.25
		175 - 225	HSS	46	79	0.15	0.23
		225 - 275	HSS	43	73	0.15	0.23
		275 - 325	SC, PC	40	68	0.13	0.20
	Alloy Steel 4140, 5140, 8640, etc.	125 - 175	HSS	46	73	0.18	0.25
		175 - 225	HSS	43	68	0.15	0.23
		225 - 275	HSS	40	64	0.15	0.23
		275 - 325	SC, PC	37	59	0.13	0.20
		325 - 375	SC, PC	34	54	0.10	0.18
	High-Strength Alloy 4340, 4330V, 300M, etc.	225 - 300	SC, PC	24	38	0.15 ❖	0.23
		300 - 350	SC, PC	18	30	0.13 ❖	0.20
350 - 400		PC	15	24	0.10 ❖	0.18	
Structural Steel A36, A285, A516, etc.	100 - 150	HSS	43	71	0.20 ❖	0.28	
	150 - 250	HSS	37	57	0.15 ❖	0.25	
	250 - 350	SC, PC	30	48	0.13 ❖	0.23	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	SC	24	38	0.10	0.18	
	200 - 250	SC, PC	18	32	0.10	0.18	
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 220	SC, PC	9	13	0.10 ❖	0.18
		220 - 310	PC	8	12	0.10 ❖	0.15
	Titanium Alloy	140 - 220	SC, PC	11	16	0.10 ❖	0.18
		220 - 310	PC	10	15	0.08 ❖	0.15
	Aerospace Alloy S82	185 - 275	SC, PC	23	35	0.15 ❖	0.20
275 - 350		SC, PC	18	31	0.13 ❖	0.18	
M	Stainless Steel 400 Series 416, 420, etc.	185 - 275	SC, PC	23	35	0.15 ❖	0.20
		275 - 350	SC, PC	18	31	0.13 ❖	0.18
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	SC, PC	23	35	0.08 ❖	0.18
		185 - 275	SC, PC	18	31	0.08 ❖	0.15
	Super Duplex Stainless Steel	135 - 185	SC, PC	18	26	0.08 ❖	0.18
185 - 275		SC, PC	15	22	0.08 ❖	0.15	
H	Wear Plate Hardox, AR400, T-1, etc.	400	SC, PC	14	21	0.08 ❖	0.15
		500	PC	10	14	0.05 ❖	0.12
		600	-	-	-	-	-
	Hardened Steel	300 - 400	PC	15	29	0.10 ❖	0.15
400 - 500		PC	10	14	0.06 ❖	0.12	
K	Nodular, Grey, Ductile Cast Iron	120 - 150	HSS	52	84	0.20	0.30
		150 - 200	HSS	46	79	0.18	0.28
		200 - 220	HSS	40	68	0.15	0.23
		220 - 260	SC, PC	34	57	0.13	0.20
		260 - 320	SC, PC	27	47	0.13	0.18
N	Cast Aluminium	30	HSS	183	-	0.23	0.38
		180	HSS	91	-	0.20	0.33
	Wrought Aluminium	30	HSS	183	280	0.12	0.33
		180	HSS	91	200	0.12	0.18
	Aluminium Bronze	100 - 200	SC	52	82	0.15	0.24
		200 - 250	SC	40	65	0.12	0.18
	Brass	100	HSS	91	144	0.18	0.27
Copper	60	SC	40	58	0.07 ❖	0.10	

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

**Deep Hole Drilling Speed and Feed Adjustment**

	Holder Length				
	Extended	Long	Long Plus	XL	3XL
<b>Speed</b>	0.90	0.85	0.80	0.80	0.75
<b>Feed</b>	-	0.95	0.90	0.90	0.90

**Recommended Speed and Feed Example**

If the recommended speed and feed is 50 m/min and 0.20 mm/rev for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 37.5 m/min and 0.18 mm/rev.

$50 \cdot 0.75 = 37.5 \text{ m/min}$        $0.20 \cdot 0.90 = 0.18 \text{ mm/rev}$

**Formulas**

1.	<b>RPM</b>	<b>= (318.47 • m/min) / DIA</b>
	where:	
	RPM	= revolutions per minute (rev/min)
	m/min	= speed (m/min)
	DIA	= diameter of drill (mm)
2.	<b>mm/min</b>	<b>= RPM • mm/rev</b>
	where:	
	mm/min	= mm per minute (mm/min)
	RPM	= revolutions per minute (rev/min)
	mm/rev	= feed rate (mm/rev)
3.	<b>m/min</b>	<b>= RPM • 0.003 • DIA</b>
	where:	
	m/min	= speed (m/min)
	RPM	= revolutions per minute (rev/min)
	DIA	= diameter of drill (mm)

Feed Rate (mm/rev) by Diameter				
17.53 mm - 24.38 mm	24.41 mm - 35.00 mm	35.01 mm - 47.80 mm	47.85 mm - 65.99 mm	66.00 mm - 114.48 mm
0.41	0.48	0.51	0.58	0.71
0.38	0.43	0.51	0.58	0.71
0.36	0.41	0.51	0.58	0.71
0.36	0.46	0.48	0.58	0.69
0.36	0.43	0.48	0.58	0.69
0.33	0.41	0.46	0.53	0.61
0.33	0.41	0.46	0.53	0.61
0.36	0.43	0.48	0.58	0.69
0.33	0.41	0.46	0.53	0.61
0.33	0.41	0.46	0.53	0.61
0.30	0.38	0.41	0.48	0.56
0.36	0.43	0.43	0.48	0.56
0.33	0.41	0.43	0.48	0.56
0.33	0.41	0.43	0.48	0.56
0.30	0.38	0.38	0.43	0.51
0.28	0.36	0.38	0.43	0.51
0.28	0.33	0.36	0.43	0.51
0.25	0.30	0.36	0.43	0.51
0.23	0.28	0.30	0.41	0.46
0.38	0.43	0.46	0.53	0.66
0.33	0.38	0.41	0.48	0.61
0.30	0.33	0.36	0.43	0.51
0.25	0.30	0.30	0.38	0.43
0.25	0.30	0.30	0.38	0.43
0.23	0.28	0.30	0.38	-
0.20	0.25	0.25	0.30	-
0.21	0.27	0.30	0.38	-
0.18	0.23	0.25	0.30	-
0.23	0.28	0.36	0.41	0.51
0.20	0.25	0.30	0.36	0.46
0.23	0.28	0.36	0.41	0.51
0.20	0.25	0.30	0.36	0.46
0.20	0.28	0.36	0.41	0.51
0.18	0.25	0.30	0.36	0.46
0.20	0.28	0.36	0.41	0.51
0.18	0.25	0.30	0.36	0.46
0.20	0.23	0.30	0.41	0.46
0.18	0.20	0.25	0.30	0.40
-	-	-	-	-
0.23	0.27	0.30	0.41	0.46
0.18	0.24	0.25	0.30	0.40
0.41	0.51	0.61	0.69	0.76
0.38	0.48	0.56	0.64	0.71
0.33	0.43	0.46	0.53	0.61
0.28	0.36	0.36	0.43	0.51
0.25	0.28	0.28	0.36	0.41
0.46	0.58	0.56	0.64	0.64
0.40	0.50	0.56	0.64	0.64
0.40	0.50	0.56	0.64	0.64
0.30	0.35	0.56	0.64	0.64
0.30	0.38	0.43	0.48	0.53
0.23	0.28	0.36	0.40	0.46
0.33	0.45	0.47	0.53	0.58
0.18	0.26	0.23	0.27	0.31


**⚠ WARNING Tool failure can cause serious injury. To prevent:**

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.


## GEN2 T-A Recommended Drilling Data | Metric (mm)

### Carbide Inserts

ISO	Material	Hardness (BHN)	Carbide Grade	m/min  AM300®	Feed Rate (mm/rev) by Diameter			
					9.50 mm - 12.95 mm	12.98 mm - 17.53 mm	17.54 mm - 24.38 mm	24.41 mm - 35.00 mm
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	C1	146	0.20	0.30	0.41	0.48
		150 - 200	C1	126	0.18	0.28	0.38	0.43
		200 - 250	C1	119	0.15	0.25	0.36	0.41
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	C1	137	0.20 ❖	0.25	0.36	0.46
		125 - 175	C1	119	0.18 ❖	0.25	0.36	0.43
		175 - 225	C1	108	0.15 ❖	0.23	0.33	0.41
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	225 - 275	C1	95	0.13 ❖	0.23	0.33	0.41
		125 - 175	C1	119	0.18	0.25	0.36	0.43
		175 - 225	C1	108	0.15	0.23	0.33	0.41
		225 - 275	C1	95	0.15	0.23	0.33	0.41
	Alloy Steel 4140, 5140, 8640, etc.	275 - 325	C1	80	0.13	0.20	0.30	0.38
		125 - 175	C1	115	0.18	0.25	0.36	0.43
		175 - 225	C1	105	0.15	0.23	0.33	0.43
		225 - 275	C1	95	0.15	0.23	0.33	0.41
		275 - 325	C1	87	0.13	0.20	0.30	0.38
	High-Strength Alloy 4340, 4330V, 300M, etc.	325 - 375	C1	78	0.10	0.18	0.28	0.36
		225 - 300	C1	70	0.15 ❖	0.23	0.28	0.33
		300 - 350	C1	63	0.13 ❖	0.20	0.25	0.30
Structural Steel A36, A285, A516, etc.	350 - 400	C1	56	0.10 ❖	0.18	0.23	0.28	
	100 - 150	C1	108	0.20 ❖	0.28	0.38	0.43	
	150 - 250	C1	87	0.15 ❖	0.25	0.33	0.38	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	250 - 350	C1	80	0.13 ❖	0.23	0.30	0.33	
	150 - 200	C1	78	0.10	0.18	0.25	0.30	
	200 - 250	C1	59	0.10	0.18	0.25	0.30	
	S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 220	C2	37	0.10 ❖	0.18	0.23
220 - 310			C2	29	0.10 ❖	0.15	0.20	0.25
Titanium Alloy		140 - 220	C2	42	0.10 ❖	0.18	0.21	0.27
		220 - 310	C2	33	0.08 ❖	0.15	0.18	0.23
Aerospace Alloy S82		185 - 275	C2	73	0.12 ❖	0.16	0.18	0.22
	275 - 350	C2	56	0.10 ❖	0.14	0.16	0.19	
M	Stainless Steel 400 Series 416, 420, etc.	185 - 275	C2	73	0.18 ❖	0.23	0.30	0.36
		275 - 350	C2	56	0.15 ❖	0.20	0.28	0.30
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	C2	73	0.14 ❖	0.18	0.24	0.29
		185 - 275	C2	56	0.12 ❖	0.16	0.22	0.24
	Super Duplex Stainless Steel	135 - 185	C2	38	0.12 ❖	0.17	0.22	0.26
		185 - 275	C2	30	0.10 ❖	0.15	0.18	0.22

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

ISO	Material	Hardness (BHN)	Carbide Grade	m/min  AM300®	Feed Rate (mm/rev) by Diameter			
					9.50 mm - 12.95 mm	12.98 mm - 17.53 mm	17.54 mm - 24.38 mm	24.41 mm - 35.00 mm
H	Wear Plate Hardox, AR400, T-1, etc.	400	C2	45	0.07 ❖	0.12	0.20	0.25
		500	C2	37	0.05 ❖	0.10	0.15	0.20
		600	C2	30	0.04 ❖	0.08	0.12	0.16
	Hardened Steel	300 - 400	C1	47	0.10 ❖	0.18	0.23	0.27
		400 - 500	C1	37	0.06 ❖	0.12	0.18	0.24
K	Nodular, Grey, Ductile Cast Iron	120 - 150	C2	152	0.20	0.30	0.38	0.48
		150 - 200	C2	146	0.18	0.28	0.33	0.43
		200 - 220	C2	131	0.15	0.23	0.30	0.38
		220 - 260	C2	113	0.13	0.20	0.28	0.33
		260 - 320	C2	102	0.13	0.18	0.25	0.28
N	Cast Aluminium	30	C2	300	0.23	0.38	0.46	0.58
		180	C2	225	0.20	0.33	0.40	0.50
	Wrought Aluminium	30	C2	426	0.12	0.33	0.40	0.50
		180	C2	300	0.12	0.18	0.30	0.35
	Aluminium Bronze	100 - 200	C2	110	0.15	0.24	0.30	0.38
		200 - 250	C2	90	0.12	0.18	0.23	0.28
	Brass	100	C2	200	0.18	0.27	0.33	0.45
	Copper	60	C2	130	0.07 ❖	0.10	0.18	0.26

❖ Contact our Application Engineering department for assistance when machining these materials

**Deep Hole Drilling Speed and Feed Adjustment**

	⚠ Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	-	0.95	0.90	0.90	0.90

**Recommended Speed and Feed Example**

If the recommended speed and feed is 50 m/min and 0.20 mm/rev for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 37.5 m/min and 0.18 mm/rev.

$50 \cdot 0.75 = 37.5 \text{ m/min}$	$0.20 \cdot 0.90 = 0.18 \text{ mm/rev}$
--------------------------------------	---

**Formulas**

<p>1. <math>RPM = (318.47 \cdot m/min) / DIA</math></p> <p>where:                      RPM = revolutions per minute (rev/min)                      m/min = speed (m/min)                      DIA = diameter of drill (mm)</p>	<p>2. <math>mm/min = RPM \cdot mm/rev</math></p> <p>where:                      mm/min = mm per minute (mm/min)                      RPM = revolutions per minute (rev/min)                      mm/rev = feed rate (mm/rev)</p>	<p>3. <math>m/min = RPM \cdot 0.003 \cdot DIA</math></p> <p>where:                      m/min = speed (m/min)                      RPM = revolutions per minute (rev/min)                      DIA = diameter of drill (mm)</p>
--	--	---




**⚠ WARNING** Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Recommended Drilling Data | Metric (mm)

### HSS Inserts

ISO	Material	Hardness (BHN)	HSS Grade	m/min			Feed Rate (mm/rev) by Diameter	
				 TiN	 TiAlN	 TiCN	9.50 mm - 12.95 mm	12.98 mm - 17.52 mm
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	HSS	61	85	79	0.18	0.25
		150 - 200	HSS	55	79	72	0.18	0.25
		200 - 250	HSS	49	73	64	0.15	0.25
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	HSS	52	76	67	0.15 ❖	0.23
		125 - 175	HSS	49	73	64	0.15 ❖	0.23
		175 - 225	HSS	46	69	59	0.13 ❖	0.20
		225 - 275	HSS	43	64	55	0.13 ❖	0.20
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 175	HSS	49	73	64	0.15	0.23
		175 - 225	HSS	46	69	59	0.13	0.20
		225 - 275	HSS	43	64	55	0.13	0.20
		275 - 325	SC, PC	40	59	52	0.10	0.18
	Alloy Steel 4140, 5140, 8640, etc.	125 - 175	HSS	46	64	59	0.15	0.20
		175 - 225	HSS	43	59	55	0.13	0.20
		225 - 275	HSS	40	55	52	0.13	0.18
		275 - 325	SC, PC	37	52	47	0.10	0.15
		325 - 375	SC, PC	34	47	44	0.08	0.15
	High-Strength Alloy 4340, 4330V, 300M, etc.	225 - 300	SC, PC	24	34	30	0.13 ❖	0.18
		300 - 350	SC, PC	18	26	24	0.10 ❖	0.18
350 - 400		PC	15	21	20	0.08 ❖	0.15	
Structural Steel A36, A285, A516, etc.	100 - 150	HSS	43	61	55	0.15 ❖	0.25	
	150 - 250	HSS	37	52	47	0.13 ❖	0.23	
	250 - 350	SC, PC	30	43	40	0.10 ❖	0.20	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	SC	24	34	32	0.10	0.15	
	200 - 250	SC, PC	18	27	26	0.10	0.15	
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 220	SC, PC	9	12	11	0.08 ❖	0.18
		220 - 310	PC	8	11	9	0.08 ❖	0.15
	Titanium Alloy	140 - 220	SC, PC	11	15	14	0.08 ❖	0.18
		220 - 310	PC	9	14	11	0.08 ❖	0.15
	Aerospace Alloy S82	185 - 275	SC, PC	23	32	29	0.15 ❖	0.20
275 - 350		SC, PC	18	27	24	0.13 ❖	0.18	
M	Stainless Steel 400 Series 416, 420, etc.	185 - 275	SC, PC	23	32	29	0.15 ❖	0.20
		275 - 350	SC, PC	18	27	24	0.13 ❖	0.18
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	SC, PC	23	32	29	0.08 ❖	0.18
		185 - 275	SC, PC	18	27	24	0.08 ❖	0.15
	Super Duplex Stainless Steel	135 - 185	SC, PC	18	24	21	0.08 ❖	0.18
185 - 275		SC, PC	15	20	18	0.08 ❖	0.15	
H	Wear Plate Hardox, AR400, T-1, etc.	400	SC, PC	14	21	17	0.08 ❖	0.15
		500	PC	11	14	12	0.05 ❖	0.13
		600	-	-	-	-	-	-
	Hardened Steel	300 - 400	PC	15	29	21	0.08 ❖	0.15
400 - 500		PC	11	14	12	0.05 ❖	0.13	
K	Nodular, Grey, Ductile Cast Iron	120 - 150	HSS	52	76	67	0.18	0.30
		150 - 200	HSS	46	69	59	0.15	0.28
		200 - 220	HSS	40	59	52	0.15	0.23
		220 - 260	SC, PC	34	50	44	0.13	0.18
		260 - 320	SC, PC	27	41	37	0.10	0.15
N	Cast Aluminium	30	HSS	183	259	229	0.20	0.33
		180	HSS	91	137	122	0.20	0.33
	Wrought Aluminium	30	HSS	183	259	229	0.10	0.15
		180	HSS	91	137	122	0.20	0.33
	Aluminium Bronze	100 - 200	SC	52	76	67	0.15	0.28
		200 - 250	SC	40	58	52	0.13	0.18
	Brass	100	HSS	91	136	122	0.18	0.30
Copper	60	SC	40	50	46	0.05 ❖	0.08	

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

Feed Rate (mm/rev) by Diameter					DW Cutting Data	
17.53 - 24.38	24.41 - 35.00	35.01 - 47.80	47.85 - 65.99	66.00 - 114.48	Speed m/min	Feed (mm/rev)
0.33	0.41	0.51	0.58	0.71	58-76	0.35
0.33	0.41	0.51	0.58	0.71		
0.33	0.41	0.51	0.58	0.71		
0.30	0.38	0.48	0.58	0.69	48-66	0.30
0.30	0.38	0.48	0.58	0.69		
0.25	0.36	0.46	0.53	0.61		
0.25	0.36	0.46	0.53	0.61	48-66	0.30
0.30	0.38	0.48	0.58	0.69		
0.25	0.36	0.46	0.53	0.61		
0.25	0.36	0.46	0.53	0.61	30.36	0.28
0.23	0.30	0.38	0.43	0.51		
0.23	0.30	0.38	0.43	0.51		
0.23	0.30	0.38	0.43	0.51	22-26	0.25
0.23	0.25	0.36	0.43	0.51	16-20	0.25
0.23	0.25	0.36	0.43	0.51		
0.20	0.23	0.30	0.38	0.46		
0.30	0.36	0.46	0.53	0.66	42-54	0.30
0.25	0.30	0.41	0.48	0.61		
0.23	0.25	0.36	0.43	0.51		
0.20	0.25	0.30	0.38	0.43	31-38	0.23
0.20	0.25	0.30	0.38	0.43		
0.20	0.25	0.30	0.38	0.43		
0.20	0.25	0.30	0.38	-	N/A	N/A
0.18	0.20	0.25	0.30	-		
0.20	0.25	0.30	0.38	-		
0.18	0.20	0.25	0.30	-		
0.23	0.25	0.36	0.41	0.51		
0.20	0.20	0.30	0.36	0.46	22-29*	0.23*
0.23	0.25	0.36	0.41	0.51		
0.20	0.20	0.30	0.36	0.46		
0.20	0.25	0.36	0.41	0.51	22-29*	0.23*
0.18	0.20	0.30	0.36	0.46		
0.20	0.25	0.36	0.41	0.51		
0.18	0.20	0.30	0.36	0.46	16-20*	0.23*
0.20	0.25	0.36	0.41	0.51		
0.18	0.20	0.30	0.36	0.46		
0.20	0.23	0.30	0.41	0.46	N/A	N/A
0.18	0.20	0.25	0.30	0.41		
-	-	-	-	-		
0.20	0.23	0.30	0.41	0.46	N/A	N/A
0.18	0.20	0.25	0.30	0.41		
-	-	-	-	-		
0.41	0.51	0.61	0.69	0.76	53-62	0.30
0.36	0.46	0.56	0.64	0.71		
0.30	0.41	0.46	0.53	0.61		
0.23	0.30	0.36	0.43	0.51		
0.18	0.23	0.30	0.36	0.41		
0.41	0.51	0.56	0.64	0.64	109-146	0.32
0.41	0.46	0.56	0.64	0.64		
0.25	0.30	0.56	0.64	0.64		
0.41	0.46	0.56	0.64	0.64	109-146	0.32
0.36	0.46	0.56	0.66	0.71		
0.23	0.30	0.36	0.43	0.51		
0.35	0.44	0.30	0.30	0.30	35-44	0.30
0.41	0.51	0.61	0.71	0.76	79-99	0.38
0.15	0.20	0.30	0.36	0.41	29-32	0.20

\*only applicable up to 120mm

Deep Hole Drilling Speed and Feed Adjustment

	Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	-	0.95	0.90	0.90	0.90

Recommended Speed and Feed Example

If the recommended speed and feed is 50 m/min and 0.20 mm/rev for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 37.5 m/min and 0.18 mm/rev.

$50 \cdot 0.75 = 37.5 \text{ m/min}$	$0.20 \cdot 0.90 = 0.18 \text{ mm/rev}$
--------------------------------------	---

Formulas

1.	<b>RPM</b>	<b>= (318.47 • m/min) / DIA</b>
	where:	
	RPM	= revolutions per minute (rev/min)
	m/min	= speed (m/min)
	DIA	= diameter of drill (mm)
2.	<b>mm/min</b>	<b>= RPM • mm/rev</b>
	where:	
	mm/min	= mm per minute (mm/min)
	RPM	= revolutions per minute (rev/min)
	mm/rev	= feed rate (mm/rev)
3.	<b>m/min</b>	<b>= RPM • 0.003 • DIA</b>
	where:	
	m/min	= speed (m/min)
	RPM	= revolutions per minute (rev/min)
	DIA	= diameter of drill (mm)

**⚠ WARNING** Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.






T-A Recommended Drilling Data | Metric (mm)

Carbide Inserts

ISO	Material	Hardness (BHN)	Carbide Grade	m/min			Feed Rate (mm/rev) by Diameter				
				TiN	TiAlN	TiCN	9.50 mm - 12.95 mm	12.98 mm - 17.52 mm	17.53 mm - 24.38 mm	24.41 mm - 35.00 mm	35.01 mm - 47.80 mm
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	C5	96	128	115	0.20	0.30	0.38	0.45	0.53
		150 - 200	C5	85	110	100	0.18	0.28	0.35	0.40	0.48
		200 - 250	C5	79	104	90	0.15	0.25	0.33	0.38	0.43
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	C5	91	119	110	0.20 ❖	0.25	0.33	0.43	0.48
		125 - 175	C5	79	104	90	0.18 ❖	0.25	0.33	0.40	0.45
		175 - 225	C5	73	95	82	0.15 ❖	0.23	0.30	0.38	0.43
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	225 - 275	C5	64	83	75	0.13 ❖	0.23	0.30	0.38	0.43
		125 - 175	C5	79	104	90	0.18	0.25	0.33	0.40	0.45
		175 - 225	C5	73	95	84	0.15	0.23	0.30	0.38	0.43
	Alloy Steel 4140, 5140, 8640, etc.	225 - 275	C5	67	83	72	0.15	0.23	0.30	0.38	0.43
		275 - 325	C5	55	70	62	0.13	0.20	0.28	0.35	0.40
		125 - 175	C5	76	99	87	0.18	0.25	0.33	0.40	0.45
175 - 225		C5	70	92	80	0.15	0.23	0.30	0.38	0.43	
High-Strength Alloy 4340, 4330V, 300M, etc.	225 - 275	C5	64	83	72	0.15	0.23	0.30	0.38	0.43	
	275 - 325	C5	61	76	68	0.13	0.20	0.28	0.35	0.40	
	325 - 375	C5	52	67	60	0.10	0.18	0.25	0.33	0.38	
Structural Steel A36, A285, A516, etc.	225 - 300	C5	49	61	55	0.15 ❖	0.23	0.25	0.30	0.38	
	300 - 350	C5	43	55	49	0.13 ❖	0.20	0.23	0.28	0.35	
	350 - 400	C5	37	49	43	0.10 ❖	0.18	0.20	0.25	0.30	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	100 - 150	C5	73	95	84	0.20 ❖	0.28	0.35	0.40	0.45	
	150 - 250	C5	61	76	68	0.15 ❖	0.25	0.30	0.35	0.40	
	250 - 350	C5	55	70	62	0.13 ❖	0.23	0.28	0.30	0.35	
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	150 - 200	C5	49	67	58	0.10	0.18	0.23	0.28	0.33
		200 - 250	C5	37	52	45	0.10	0.18	0.23	0.28	0.33
	Titanium Alloy	140 - 220	C2	24	32	28	0.10 ❖	0.18	0.23	0.28	0.33
		220 - 310	C2	18	26	22	0.10 ❖	0.15	0.20	0.25	0.30
	Aerospace Alloy S82	140 - 220	C2	30	38	32	0.10 ❖	0.18	0.23	0.28	0.33
		220 - 310	C2	24	33	28	0.10 ❖	0.15	0.20	0.25	0.30
M	Stainless Steel 400 Series 416, 420, etc.	185 - 275	C2	49	64	57	0.17 ❖	0.22	0.29	0.35	0.40
		275 - 350	C2	37	49	43	0.14 ❖	0.19	0.27	0.30	0.35
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	C2	49	64	57	0.13 ❖	0.17	0.22	0.26	0.30
		185 - 275	C2	37	49	43	0.11 ❖	0.14	0.20	0.22	0.25
	Super Duplex Stainless Steel	135 - 185	C2	25	33	29	0.11 ❖	0.15	0.19	0.23	0.27
		185 - 275	C2	19	25	22	0.09 ❖	0.13	0.18	0.20	0.23

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

ISO	Material	Hardness (BHN)	Carbide Grade	m/min			Feed Rate (mm/rev) by Diameter				
				 TiN	 TiAlN	 TiCN	9.50 mm - 12.95 mm	12.98 mm - 17.52 mm	17.53 mm - 24.38 mm	24.41 mm - 35.00 mm	35.01 mm - 47.80 mm
H	Wear Plate Hardox, AR400, T-1, etc.	400	C5	23	35	30	0.07	0.12	0.20	0.25	0.30
		500	C5	15	26	21	0.05	0.10	0.15	0.20	0.25
		600	C5	11	22	16	0.04	0.08	0.12	0.16	0.20
	Hardened Steel	300 - 400	C5	34	43	39	0.10 ❖	0.18	0.23	0.28	0.33
400 - 500		C5	20	25	23	0.08 ❖	0.15	0.20	0.23	0.28	
K	Nodular, Grey, Ductile Cast Iron	120 - 150	C2, C3	98	141	127	0.20	0.30	0.38	0.48	0.58
		150 - 200	C2, C3	82	122	102	0.18	0.28	0.33	0.43	0.53
		200 - 220	C2, C3	73	110	93	0.15	0.23	0.30	0.38	0.45
		220 - 260	C2, C3	64	95	79	0.13	0.20	0.28	0.33	0.38
		260 - 320	C2, C3	55	83	69	0.13	0.18	0.25	0.28	0.33
N	Cast Aluminium	30	C2	366	460	410	0.25	0.38	0.45	0.50	0.55
		180	C2	244	306	275	0.23	0.33	0.40	0.45	0.50
	Wrought Aluminium	30	C2	366	460	410	0.10	0.15	0.25	0.30	0.36
		180	C2	244	306	275	0.20	0.28	0.36	0.45	0.50
	Aluminium Bronze	100 - 200	C2	85	110	100	0.13	0.20	0.25	0.36	0.42
		200 - 250	C2	64	94	79	0.10	0.15	0.18	0.25	0.33
	Brass	100	C2	130	184	160	0.15	0.23	0.28	0.38	0.45
Copper	60	C2	80	120	100	0.05 ❖	0.08	0.10	0.15	0.25	

❖ Contact our Application Engineering department for assistance when machining these materials

**Deep Hole Drilling Speed and Feed Adjustment**

	1. Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	-	0.95	0.90	0.90	0.90

**Recommended Speed and Feed Example**

If the recommended speed and feed is 50 m/min and 0.20 mm/rev for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 37.5 m/min and 0.18 mm/rev.

$50 \cdot 0.75 = 37.5 \text{ m/min}$	$0.20 \cdot 0.90 = 0.18 \text{ mm/rev}$
--------------------------------------	---





**Formulas**

1. $RPM = (318.47 \cdot m/min) / DIA$ where: RPM = revolutions per minute (rev/min) m/min = speed (m/min) DIA = diameter of drill (mm)	2. $mm/min = RPM \cdot mm/rev$ where: mm/min = mm per minute (mm/min) RPM = revolutions per minute (rev/min) mm/rev = feed rate (mm/rev)	3. $m/min = RPM \cdot 0.003 \cdot DIA$ where: m/min = speed (m/min) RPM = revolutions per minute (rev/min) DIA = diameter of drill (mm)
--	--	---

**1. WARNING** Tool failure can cause serious injury. To prevent:  
 - When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.  
 - Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.  
 Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Recommended Drilling Data | Metric (mm)

HSS Inserts | Flat Bottom Geometry

ISO	Material	Hardness (BHN)	HSS Grade	m/min			
				 TiN	 TiAlN	 TiCN	 AM200®
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	HSS	52	76	70	88
		150 - 200	HSS	47	70	62	81
		200 - 250	HSS	43	64	56	74
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	HSS	46	67	59	77
		125 - 175	HSS	43	64	56	74
		175 - 225	HSS	40	59	53	68
		225 - 275	HSS	37	56	47	65
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 175	HSS	43	64	56	74
		175 - 225	HSS	40	59	53	68
		225 - 275	HSS	37	56	47	65
		275 - 325	SC	34	53	46	61
	Alloy Steel 4140, 5140, 8640, etc.	125 - 175	HSS	40	56	53	65
		175 - 225	HSS	37	53	47	61
		225 - 275	HSS	34	47	44	54
		275 - 325	SC	32	44	41	51
		325 - 375	SC	29	41	38	47
	High-Strength Alloy 4340, 4330V, 300M, etc.	225 - 300	SC	21	29	26	33
		300 - 350	SC	15	23	21	27
		350 - 400	SC	13	20	18	23
	Structural Steel A36, A285, A516, etc.	100 - 150	HSS	36	52	47	60
150 - 250		HSS	32	44	41	51	
250 - 350		SC	26	37	34	43	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	SC	21	29	27	33	
	200 - 250	SC	15	24	23	28	
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 220	SC	7	10	9	13
		220 - 310	SC	6	9	7	10
	Titanium Alloy	140 - 220	SC	10	14	12	16
		220 - 310	SC	8	12	11	14
Aerospace Alloy S82	185 - 275	SC	20	27	26	34	
	275 - 350	SC	15	24	21	28	
M	Stainless Steel 400 Series 416, 420, etc.	185 - 275	SC	20	27	26	34
		275 - 350	SC	15	24	21	28
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	SC	20	27	26	34
		185 - 275	SC	15	24	21	28
	Super Duplex Stainless Steel	135 - 185	SC	20	27	26	34
185 - 275	SC	15	24	21	28		
H	Wear Plate Hardox, AR400, T-1, etc.	400	SC	-	-	-	-
		500	SC	-	-	-	-
		600	-	-	-	-	-
	Hardened Steel	300 - 400	SC	13	20	18	24
400 - 500		SC	8	12	10	13	
K	Nodular, Grey, Ductile Cast Iron	120 - 150	HSS	46	67	59	77
		150 - 200	HSS	40	59	53	68
		200 - 220	HSS	34	53	46	61
		220 - 260	SC	29	46	38	53
		260 - 320	SC	24	37	32	43
N	Cast Aluminium	30	HSS	160	228	198	-
		180	HSS	79	122	107	-
	Wrought Aluminium	30	HSS	160	228	198	261
		180	HSS	79	122	107	141
	Aluminium Bronze	100 - 200	SC	40	59	53	70
		200 - 250	SC	29	46	38	50
	Brass	100	HSS	46	67	59	78
Copper	60	SC	35	45	40	53	

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

Deep Hole Drilling Speed and Feed Adjustment

	▲ Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	-	0.95	0.90	0.90	0.90

Recommended Speed and Feed Example

If the recommended speed and feed is 50 m/min and 0.20 mm/rev for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 37.5 m/min and 0.18 mm/rev.

$$50 \cdot 0.75 = 37.5 \text{ m/min} \quad 0.20 \cdot 0.90 = 0.18 \text{ mm/rev}$$

Formulas

1.	<b>RPM</b>	= $(318.47 \cdot \text{m/min}) / \text{DIA}$
	where:	
	RPM	= revolutions per minute (rev/min)
	m/min	= speed (m/min)
	DIA	= diameter of drill (mm)
2.	<b>mm/min</b>	= $\text{RPM} \cdot \text{mm/rev}$
	where:	
	mm/min	= mm per minute (mm/min)
	RPM	= revolutions per minute (rev/min)
	mm/rev	= feed rate (mm/rev)
3.	<b>m/min</b>	= $\text{RPM} \cdot 0.003 \cdot \text{DIA}$
	where:	
	m/min	= speed (m/min)
	RPM	= revolutions per minute (rev/min)
	DIA	= diameter of drill (mm)

Feed Rate (mm/rev) by Diameter					
9.50 mm - 12.95 mm	12.98 mm - 17.53 mm	17.53 mm - 24.38 mm	24.21 mm - 35.00 mm	35.01 mm - 47.80 mm	47.85 mm - 65.99 mm
0.15	0.23	0.28	0.35	0.41	0.46
0.15	0.23	0.28	0.35	0.41	0.46
0.13	0.23	0.28	0.35	0.38	0.43
0.13 ❖	0.20	0.25	0.33	0.38	0.43
0.13 ❖	0.20	0.25	0.33	0.38	0.41
0.10 ❖	0.18	0.23	0.30	0.36	0.41
0.10 ❖	0.18	0.23	0.30	0.36	0.38
0.13	0.20	0.25	0.33	0.38	0.46
0.10	0.18	0.23	0.30	0.36	0.43
0.10	0.18	0.23	0.30	0.36	0.43
0.10	0.15	0.20	0.25	0.33	0.38
0.13	0.18	0.23	0.30	0.33	0.41
0.10	0.18	0.23	0.30	0.33	0.41
0.10	0.15	0.23	0.30	0.33	0.41
0.10	0.13	0.20	0.25	0.30	0.38
0.08	0.13	0.20	0.25	0.30	0.36
0.10 ❖	0.15	0.20	0.23	0.25	0.30
0.08 ❖	0.15	0.20	0.23	0.25	0.30
0.08 ❖	0.13	0.18	0.20	0.23	0.28
0.13 ❖	0.23	0.25	0.30	0.38	0.43
0.10 ❖	0.20	0.23	0.25	0.33	0.41
0.10 ❖	0.18	0.20	0.23	0.30	0.38
0.10	0.13	0.18	0.23	0.25	0.30
0.10	0.13	0.18	0.23	0.23	0.28
0.08 ❖	0.15	0.18	0.23	0.25	0.30
0.08 ❖	0.13	0.15	0.18	0.20	0.25
0.08 ❖	0.15	0.18	0.23	0.25	0.30
0.08 ❖	0.13	0.15	0.18	0.20	0.25
0.13 ❖	0.18	0.20	0.25	0.30	0.38
0.10 ❖	0.15	0.18	0.23	0.25	0.30
0.13 ❖	0.18	0.20	0.25	0.30	0.36
0.10 ❖	0.15	0.18	0.23	0.25	0.28
0.13 ❖	0.18	0.20	0.25	0.30	0.36
0.10 ❖	0.15	0.18	0.23	0.25	0.28
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
0.08 ❖	0.13	0.18	0.20	0.27	0.38
0.06 ❖	0.10	0.15	0.18	0.23	0.28
0.15	0.25	0.36	0.43	0.48	0.51
0.13	0.23	0.30	0.41	0.46	0.48
0.13	0.20	0.25	0.36	0.41	0.43
0.10	0.15	0.20	0.25	0.33	0.33
0.10	0.13	0.15	0.20	0.25	0.25
0.18	0.28	0.36	0.43	0.46	0.48
0.18	0.28	0.36	0.41	0.43	0.48
0.18	0.28	0.36	0.43	0.46	0.48
0.18	0.28	0.36	0.41	0.43	0.48
0.13	0.23	0.30	0.41	0.51	0.61
0.10	0.15	0.20	0.25	0.31	0.38
0.15	0.25	0.36	0.43	0.53	0.63
0.05 ❖	0.08	0.15	0.20	0.25	0.35





**1. WARNING** Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.





## T-A Recommended Drilling Data | Metric (mm)

Carbide Inserts | Flat Bottom Geometry

ISO	Material	Hardness (BHN)	Carbide Grade	m/min				Feed Rate (mm/rev) by Diameter				
				 TiN	 TiAlN	 TiCN	 AM200®	9.50 mm - 12.95 mm	12.98 mm - 17.53 mm	17.54 mm - 24.38 mm	24.41 mm - 35.00 mm	
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	C2	82	110	98	126	0.17	0.26	0.32	0.39	
		150 - 200	C2	73	94	85	110	0.15	0.24	0.30	0.35	
		200 - 250	C2	67	88	76	102	0.13	0.22	0.28	0.32	
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	C2	79	102	94	117	0.17 ❖	0.22	0.28	0.37	
		125 - 175	C2	67	88	76	102	0.15 ❖	0.22	0.28	0.35	
		175 - 225	C2	61	81	70	93	0.13 ❖	0.19	0.26	0.32	
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	225 - 275	C2	55	70	64	81	0.11 ❖	0.19	0.26	0.32	
		125 - 175	C2	67	88	76	102	0.15	0.22	0.28	0.35	
		175 - 225	C2	61	81	72	93	0.13	0.19	0.26	0.32	
	Alloy Steel 4140, 5140, 8640, etc.	225 - 275	C2	55	70	61	81	0.13	0.19	0.26	0.32	
		275 - 325	C2	46	61	53	70	0.11	0.17	0.24	0.30	
		325 - 375	C2	44	58	50	67	0.09	0.15	0.22	0.28	
	High-Strength Alloy 4340, 4330V, 300M, etc.	125 - 175	C2	64	85	75	99	0.15	0.22	0.28	0.35	
		175 - 225	C2	59	79	67	91	0.13	0.19	0.26	0.32	
		225 - 275	C2	55	70	61	81	0.13	0.19	0.26	0.32	
	Structural Steel A36, A285, A516, etc.	275 - 325	C2	52	66	58	76	0.11	0.17	0.24	0.30	
		325 - 375	C2	44	58	50	67	0.09	0.15	0.22	0.28	
		225 - 300	C2	41	52	47	59	0.13 ❖	0.19	0.22	0.26	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	300 - 350	C2	37	47	41	55	0.11 ❖	0.17	0.19	0.24		
	350 - 400	C2	30	41	37	47	0.09 ❖	0.15	0.17	0.22		
	100 - 150	C2	62	81	72	93	0.17 ❖	0.24	0.30	0.35		
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	150 - 250	C2	52	66	58	76	0.13 ❖	0.22	0.28	0.30	
		250 - 350	C2	47	61	53	70	0.11 ❖	0.19	0.25	0.26	
	Titanium Alloy	150 - 200	C2	41	58	49	67	0.09	0.15	0.19	0.24	
		200 - 250	C2	30	44	37	50	0.09	0.15	0.19	0.24	
	Aerospace Alloy S82	140 - 220	C2	21	27	23	32	0.09 ❖	0.15	0.19	0.24	
		220 - 310	C2	15	21	18	24	0.09 ❖	0.13	0.17	0.22	
	Stainless Steel 400 Series 416, 420, etc.	140 - 220	C2	26	33	28	40	0.08 ❖	0.14	0.17	0.20	
		220 - 310	C2	21	29	25	30	0.08 ❖	0.12	0.15	0.18	
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	185 - 275	C2	43	37	50	40	0.15 ❖	0.17	0.25	0.30	
		275 - 350	C2	33	28	38	32	0.13 ❖	0.15	0.23	0.25	
	M	Super Duplex Stainless Steel	185 - 275	C2	43	56	50	64	0.15 ❖	0.20	0.25	0.30
			275 - 350	C2	33	43	38	49	0.13 ❖	0.18	0.23	0.25
		Stainless Steel 400 Series 416, 420, etc.	135 - 185	C2	28	37	33	40	0.13 ❖	0.17	0.21	0.25
			185 - 275	C2	21	28	25	32	0.11 ❖	0.15	0.19	0.21
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	C2	22	29	26	33	0.10 ❖	0.14	0.17	0.20	
		185 - 275	C2	17	22	19	26	0.08 ❖	0.12	0.15	0.17	

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

ISO	Material	Hardness (BHN)	Carbide Grade	m/min				Feed Rate (mm/rev) by Diameter			
				 TiN	 TiAlN	 TiCN	 AM200®	9.50 mm - 12.95 mm	12.98 mm - 17.53 mm	17.54 mm - 24.38 mm	24.41 mm - 35.00 mm
H	Wear Plate Hardox, AR400, T-1, etc.	400	C2	20	31	26	39	0.06 ❖	0.10	0.16	0.20
		500	C2	13	23	18	31	0.04 ❖	0.08	0.12	0.16
		600	C2	10	19	14	25	0.03 ❖	0.06	0.10	0.13
	Hardened Steel	300 - 400	C2	30	38	34	41	0.08 ❖	0.14	0.18	0.22
		400 - 500	C2	18	22	20	33	0.06 ❖	0.12	0.16	0.18
K	Nodular, Grey, Ductile Cast Iron	120 - 150	C2	82	120	108	137	0.17	0.26	0.32	0.41
		150 - 200	C2	70	104	87	119	0.15	0.24	0.28	0.38
		200 - 220	C2	61	94	79	108	0.13	0.19	0.26	0.32
		220 - 260	C2	55	81	67	93	0.11	0.17	0.24	0.28
		260 - 320	C2	47	70	58	81	0.11	0.15	0.22	0.24
N	Cast Aluminium	30	C2	160	228	198	–	0.22	0.32	0.41	0.43
		180	C2	79	122	107	–	0.19	0.28	0.35	0.39
	Wrought Aluminium	30	C2	292	368	328	390	0.12	0.18	0.23	0.25
		180	C2	195	245	220	260	0.10	0.16	0.20	0.22
	Aluminium Bronze	100 - 200	C2	73	95	85	105	0.10	0.16	0.20	0.29
		200 - 250	C2	55	81	68	87	0.08	0.12	0.14	0.20
	Brass	100	C2	112	160	138	185	0.12	0.18	0.22	0.30
Copper	60	C2	68	105	85	117	0.04 ❖	0.06	0.08	0.12	

❖ Contact our Application Engineering department for assistance when machining these materials

**Deep Hole Drilling Speed and Feed Adjustment**

	⚠ Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	–	0.95	0.90	0.90	0.90

**Recommended Speed and Feed Example**

If the recommended speed and feed is 50 m/min and 0.20 mm/rev for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 37.5 m/min and 0.18 mm/rev.

$50 \cdot 0.75 = 37.5 \text{ m/min}$	$0.20 \cdot 0.90 = 0.18 \text{ mm/rev}$
--------------------------------------	---

**Formulas**

<p>1. <math>RPM = (318.47 \cdot m/min) / DIA</math></p> <p>where:                      RPM = revolutions per minute (rev/min)                      m/min = speed (m/min)                      DIA = diameter of drill (mm)</p>	<p>2. <math>mm/min = RPM \cdot mm/rev</math></p> <p>where:                      mm/min = mm per minute (mm/min)                      RPM = revolutions per minute (rev/min)                      mm/rev = feed rate (mm/rev)</p>	<p>3. <math>m/min = RPM \cdot 0.003 \cdot DIA</math></p> <p>where:                      m/min = speed (m/min)                      RPM = revolutions per minute (rev/min)                      DIA = diameter of drill (mm)</p>
--	--	---


**⚠ WARNING** Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Recommended Drilling Data | Metric (mm)

Carbide Inserts | Diamond Coating

Material	Carbide Grade	m/min  Diamond Coating	Feed Rate (mm/rev) by Diameter				
			9.5 mm - 12.5 mm	13 mm - 17.5 mm	18 mm - 24 mm	25 mm - 35 mm	
Polymer Matrix Composites	Carbon (hard)	N2	305 - 450	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Carbon Fiber	N2	305 - 450	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Carbon / Glass Fiber	N2	305 - 450	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Fiberglass	N2	305 - 450	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Graphite	N2	305 - 450	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Plastics	N2	76 - 305	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Epoxy Resin	N2	76 - 305	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Bismaleimide Resin	N2	76 - 305	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Polyester Resin	N2	76 - 305	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Phenolic Resin	N2	76 - 305	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Rubber	N2	76 - 305	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
Metal Matrix Composites	Aluminium	N2	305	0.20	0.33	0.41	0.51
	Si < 10%	N2	305	0.20	0.33	0.41	0.51
	10% < Si < 15%	N2	259 - 305	0.20	0.33	0.41	0.51
	15% < Si < 20%	N2	198 - 259	0.20	0.33	0.41	0.51
	20% < Si < 25%	N2	152 - 198	0.20	0.33	0.41	0.51
	25% < Si	N2	61 - 152	0.20	0.33	0.41	0.51
	Brass	N2	76 - 152	0.20	0.33	0.41	0.51
	Bronze	N2	76 - 152	0.20	0.33	0.41	0.51
	Copper	N2	30 - 76	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Copper Alloys	N2	30 - 76	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Lead Alloys	N2	30 - 76	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Magnesium Alloys	N2	30 - 76	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Precious Metals	N2	30 - 76	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
Ceramic Matrix Composites	Carbide (green)	N2	15 - 76	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Ceramic (green)	N2	15 - 76	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36
	Ceramic (pre-sintered)	N2	15 - 76	0.10 - 0.15	0.20 - 0.25	0.25 - 0.30	0.30 - 0.36

### Deep Hole Drilling Speed and Feed Adjustment

	Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	-	0.95	0.90	0.90	0.90

### Recommended Speed and Feed Example

If the recommended speed and feed is 50 m/min and 0.20 mm/rev for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 37.5 m/min and 0.18 mm/rev.

$$50 \cdot 0.75 = 37.5 \text{ m/min}$$

$$0.20 \cdot 0.90 = 0.18 \text{ mm/rev}$$

#### **⚠ WARNING** Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.



## Tap Drill Information and Formulas | Metric (mm)

### Metric Profile Screw Thread

Tap Size	Tap Drill Size	Decimal Equivalent	* Theo % Thread	Probable Mean Oversize	Probable Hole Size	** Probable % Thread
12 x 1.75	10.2 mm	0.4016"	79%	0.075 mm	10.28 mm	76%
12 x 1.75	13/32"	0.4063"	74%	0.075 mm	10.40 mm	71%
12 x 1.25	27/64"	0.4219"	79%	0.075 mm	10.79 mm	74%
12 x 1.25	10.8 mm	0.4252"	74%	0.075 mm	10.88 mm	69%
14 x 20	15/32"	0.4688"	81%	0.075 mm	11.98 mm	78%
14 x 20	12.0 mm	0.4724"	77%	0.075 mm	12.08 mm	74%
14 x 1.5	12.5 mm	0.4921"	77%	0.075 mm	12.58 mm	73%
16 x 2.0	14.0 mm	0.5512"	77%	0.075 mm	14.08 mm	74%
16 x 1.5	14.5 mm	0.5709"	77%	0.075 mm	14.58 mm	73%
16 x 1.5	37/64"	0.5781"	68%	0.075 mm	14.76 mm	64%
18 x 2.5	15.5 mm	0.6102"	77%	0.075 mm	15.58 mm	75%
18 x 1.5	16.5 mm	0.6496"	77%	0.075 mm	16.58 mm	73%
18 x 1.5	21/32"	0.6563"	68%	0.075 mm	16.75 mm	64%
20 x 2.5	11/16"	0.6875"	78%	0.075 mm	17.54 mm	76%
20 x 2.5	17.5 mm	0.6890"	77%	0.075 mm	17.58 mm	74%
20 x 1.5	18.5 mm	0.7283"	77%	0.075 mm	18.58 mm	73%
20 x 1.5	47/64"	0.7344"	69%	0.075 mm	18.66 mm	65%
22 x 2.5	49/64"	0.7656"	79%	0.075 mm	19.52 mm	76%
22 x 2.5	19.5 mm	0.7677"	77%	0.075 mm	19.58 mm	75%
22 x 1.5	20.5 mm	0.8071"	77%	0.075 mm	20.58 mm	73%
22 x 1.5	13/16"	0.8125"	70%	0.075 mm	20.71 mm	66%
24 x 3	13/16"	0.8125"	86%	0.075 mm	20.71 mm	84%
24 x 3	21.0 mm	0.8268"	76%	0.075 mm	21.08 mm	75%
24 x 2	22.0 mm	0.8661"	77%	0.075 mm	22.08 mm	74%
24 x 2	7/8"	0.8750"	68%	0.075 mm	22.30 mm	65%
27 x 3	24.0 mm	0.9449"	77%	0.075 mm	24.08 mm	75%

### Taper Pipe Thread (NPT)

Tap Size	Tap Drill Size	Decimal Equivalent	Theo % Thread*	Probable Mean Oversize	Probable Hole Size	Probable % Thread**
1/4 - 18	7/16	0.4375	-	0.075 mm	11.19 mm	-
3/8 - 18	9/16	0.5625	-	0.075 mm	14.76 mm	-
1/2 - 14	45/64	0.7031	-	0.075 mm	18.33 mm	-
3/4 - 14	29/32	0.9063	-	0.075 mm	23.89 mm	-

\* Based on nominal tap drill diameter

\*\* Based on 0.075 mm probable mean oversize

To calculate the percent of full thread for a given hole diameter:

$$\% \text{ Thread} = \left[ \frac{76.93}{\text{Pitch (mm)}} \right] \left[ \text{Basic Major Diameter of Thread (mm)} - \text{Drill Hole Size (mm)} \right]$$

### Notes

- The above tap drill information represents probable thread percentages for the standard tap drills stocked at Allied Machine. Special insert diameters may be required in order to meet a user specific percentage of thread requirements.
- The 0.0075 mm probable mean oversize hole condition is based on optimum cutting conditions. Probable percent of full thread may vary based on less ideal cutting conditions.
- The table and equations on this page are found in the *Machinery's Handbook*. Permission to simplify and print the equations is granted by the editor of the *Machinery's Handbook*.

### Formulas

1. <b>RPM</b>	= (318.47 • m/min) / DIA
where:	
RPM	= revolutions per minute (rev/min)
m/min	= speed (m/min)
DIA	= diameter of drill (mm)
2. <b>mm/min</b>	= RPM • mm/rev
where:	
mm/min	= mm per minute (mm/min)
RPM	= revolutions per minute (rev/min)
mm/rev	= feed rate (mm/rev)
3. <b>m/min</b>	= RPM • 0.003 • DIA
where:	
m/min	= speed (m/min)
RPM	= revolutions per minute (rev/min)
DIA	= diameter of drill (mm)
4. <b>Thrust</b>	= 154 • (mm/rev) • DIA • K <sub>m</sub>
where:	
Thrust	= axial thrust (N)
mm/rev	= feed rate (mm/rev)
DIA	= diameter of drill (mm)
K <sub>m</sub>	= specific cutting energy (Bar)
5. <b>Tool Power</b>	= ((mm/rev) • RPM • K <sub>m</sub> • DIA <sup>2</sup> ) / 210604.8
where:	
Tool Power	= tool power (HP)
mm/rev	= feed rate (mm/rev)
RPM	= revolutions per minute (rev/min)
K <sub>m</sub>	= specific cutting energy (Bar)
DIA	= diameter of drill (mm)

### Material Constants

Type of Material	Hardness	K <sub>m</sub> (kPa)
Plain Carbon and Alloy Steel	85 - 200 BHN	5.45
	200 - 275 BHN	6.48
	275 - 375 BHN	6.89
	375 - 425 BHN	7.93
High-Temperature Alloys	-	9.93
Stainless Steels	135 - 275 BHN	6.48
	30 - 45 RC	7.45
Cast Iron	100 - 200 BHN	3.45
	200 - 300 BHN	7.45
Copper Alloy	20 - 80 RB	2.96
	80 - 100 RB	4.96
Titanium Alloy	-	4.96
Aluminium Alloy	-	1.52
Magnesium Alloy	-	1.10

## Coolant Recommendations | Metric (mm)

### HSS Drill Inserts

ISO	Material	Pressure or Flow Rate	9.5 mm - 12.5 mm	13 mm - 17 mm	18 mm - 24 mm	25 mm - 35 mm	36 mm - 50 mm	51 mm - 76 mm	76 mm - 102 mm
P	<b>Free-Machining Steel</b> 1118, 1215, 12L14, etc.	Bar	12 - 13	7 - 8	7 - 10	6 - 8	5 - 7	4	5 - 6
		LPM	9.5 - 9.8	10.6 - 11.4	16.7 - 19.7	26.5 - 30.3	45.4 - 53.0	114 - 125	144 - 167
	<b>Low-Carbon Steel</b> 1010, 1020, 1025, 1522, 1144, etc.	Bar	11 - 12	5 - 6	5 - 7	4 - 6	4 - 5	2 - 3	3 - 5
		LPM	9.1 - 9.5	9.1 - 9.8	14.0 - 15.9	22.7 - 26.5	41.6 - 45.4	98 - 114	125 - 144
	<b>Medium-Carbon Steel</b> 1030, 1040, 1050, 1527, 1140, 1151, etc.	Bar	11	5 - 6	5 - 6	4 - 5	3 - 5	2 - 3	3 - 5
		LPM	8.7 - 9.1	8.7 - 9.8	13.6 - 15.5	18.9 - 22.7	37.9 - 45.4	98 - 114	125 - 144
	<b>Alloy Steel</b> 4140, 5140, 8640, etc.	Bar	11	5	5 - 6	3 - 5	3 - 4	2	3
		LPM	8.7 - 9.1	8.3 - 9.1	13.2 - 14.8	18.9 - 22.7	31.9 - 41.6	98 - 106	114 - 125
	<b>High-Strength Alloy</b> 4340, 4330V, 300M, etc.	Bar	10 - 11	4	3	2	2	1 - 2	2
		LPM	8.7 - 9.1	7.9 - 8.3	11.0 - 11.7	15.1 - 18.9	26.5 - 30.3	79 - 87	87 - 98
	<b>Structural Steel</b> A36, A285, A516, etc.	Bar	11	5 - 6	5 - 6	3 - 4	3	2	3
		LPM	8.7 - 9.1	9.1 - 9.8	13.2 - 14.8	18.9 - 22.7	34.1 - 37.9	87 - 98	114 - 125
	<b>Tool Steel</b> H-13, H-21, A-4, O-2, S-3, etc.	Bar	10 - 11	4	3	2	2	1 - 2	2
		LPM	8.7 - 9.1	7.9 - 8.3	11.0 - 11.7	15.1 - 18.9	26.5 - 30.3	79 - 87	87 - 98
S	<b>High-Temp Alloy</b> Hastelloy B, Inconel 600, etc.	Bar	10 - 11	4 - 5	3 - 4	2	2	2	3
		LPM	8.7 - 9.1	8.3 - 8.7	11.7 - 12.1	15.1 - 18.9	26.5 - 30.3	87 - 98	125
	<b>Titanium Alloy</b>	Bar	10 - 11	4 - 5	3 - 4	2	2	2	3
		LPM	8.7 - 9.1	8.3 - 8.7	11.7 - 12.1	15.1 - 18.9	26.5 - 30.3	87 - 98	125
	<b>Aerospace Alloy</b> S82	Bar	10 - 11	4 - 5	3 - 4	2	2	2	3
		LPM	8.7 - 9.1	8.3 - 8.7	11.7 - 12.1	15.1 - 18.9	26.5 - 30.3	87 - 98	125
M	<b>Stainless Steel 400 Series</b> 416, 420, etc.	Bar	11.8	5.9	5.2	3.8	3.5	2	3.1
		LPM	9.5	9.8	14	23	38	98	117
	<b>Stainless Steel 300 Series</b> 304, 316, 17-4PH, etc.	Bar	11.8	5.9	5.2	3.8	3.5	2	3.1
		LPM	9.5	9.8	14	23	38	98	117
	<b>Super Duplex Stainless Steel</b>	Bar	11.8	5.9	5.2	3.8	3.5	2	3.1
		LPM	9.5	9.8	14	23	38	98	117
H	<b>Wear Plate</b> Hardox, AR400, T-1, etc.	Bar	10.7	4.2	3.5	2	2	1.7	2
		LPM	9.1	8.3	11.7	19	30	87	98
	<b>Hardened Steel</b>	Bar	10.7	4.2	3.5	2	2	1.7	2
		LPM	9.1	8.3	11.7	19	30	87	98
K	<b>SG / Nodular Cast Iron</b>	Bar	11	4.5	4.2	2.8	2.4	2	2.4
		LPM	9.1	8.7	12.5	19	34	98	106
	<b>Grey / White Iron</b>	Bar	11	4.5	4.2	2.8	2.4	2	2.4
		LPM	9.1	8.7	12.5	19	34	98	106
N	<b>Cast Aluminium</b>	Bar	14.5	12.4	15.8	11	8.6	3.5	5.5
		LPM	10	14	23	34	61	125	159
	<b>Wrought Aluminium</b>	Bar	14.5	12.4	15.8	11	8.6	3.5	5.5
		LPM	10	14	23	34	61	125	159
	<b>Aluminium Bronze</b>	Bar	12.8	8.3	9.65	7.95	6.9	3.5	6.2
		LPM	9.6	11.4	19.7	30.3	53	125	167
	<b>Brass</b>	Bar	11	4.5	4.2	2.8	2.4	2	2.4
		LPM	9.1	8.7	12.5	19	34	98	106
	<b>Copper</b>	Bar	12.8	8.3	9.65	7.95	6.9	3.5	6.2
		LPM	9.6	11.4	19.7	30.3	53	125	167

### Deep Hole Drilling Coolant Adjustment

	Holder Length				
	Extended	Long	Long Plus	XL	3XL
Pressure and Flow	1.3	1.5	2	2	3

### Recommended Coolant Example

If the recommended pressure and flow is 12 Bar and 22 LPM for a standard length holder, then the adjusted pressure and flow for a 3XL holder would be 36 Bar and 66 LPM.

$$12 \cdot 3 = 36 \text{ Bar} \qquad 22 \cdot 3 = 66 \text{ LPM}$$

#### ⚠ WARNING Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

**IMPORTANT:** The coolant pressure and flow rate recommendations above represent a good approximation to obtain optimum tool life and chip evacuation at Allied Machine recommended speeds and feeds. If lower coolant capabilities exist in a drilling application, the T-A® drilling system will still function at reduced penetration rates. Contact our Application Engineering department for a more specific recommendation of coolant requirements and/or speeds and feeds.

## Coolant Recommendations | Metric (mm)

### Carbide Drill Inserts

ISO	Material	Pressure or Flow Rate	9.5 mm - 12.5 mm	13 mm - 17 mm	18 mm - 24 mm	25 mm - 35 mm	36 mm - 47 mm
P	Free-Machining Steel 1118, 1215, 12L14, etc.	Bar	17 - 20	17	15	15	20
		LPM	12.2	16.3	25.2	41.5	71.9
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	Bar	18	11	11	12	9
		LPM	11.4	13.3	20.6	36.5	62.0
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	Bar	17	10	10	10	8
		LPM	11.3	12.5	20.0	33.8	57.0
	Alloy Steel 4140, 5140, 8640, etc.	Bar	17	9	10	8	7
		LPM	11.1	12.3	19.3	30.0	55.8
	High-Strength Alloy 4340, 4330V, 300M, etc.	Bar	15	5	4	3	3
		LPM	10.4	9.1	12.6	18.8	33.6
Structural Steel A36, A285, A516, etc.	Bar	16	9	8	7	5	
	LPM	10.8	12.0	17.5	27.8	47.1	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	Bar	15	5	5	3	3	
	LPM	10.4	9.1	13.6	19.7	36.5	
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	Bar	17	11	12	11	9
		LPM	11.1	13.5	21.9	35.4	62.0
	Titanium Alloy	Bar	17	11	12	11	9
		LPM	11.1	13.5	21.9	35.4	62.0
	Aerospace Alloy S82	Bar	17	11	12	11	9
LPM		11.1	13.5	21.9	35.4	62.0	
M	Stainless Steel 400 Series 416, 420, etc.	Bar	22.7	16.5	17.9	17.2	13.1
		LPM	13	16.3	26.3	44.2	75
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	Bar	22.7	16.5	17.9	17.2	13.1
		LPM	13	16.3	26.3	44.2	75
	Super Duplex Stainless Steel	Bar	22.7	16.5	17.9	17.2	13.1
LPM		13	16.3	26.3	44.2	75	
H	Wear Plate Hardox, AR400, T-1, etc.	Bar	14.5	5.2	4.8	3.4	3.1
		LPM	10.4	9.1	13.6	19.7	36.5
	Hardened Steel	Bar	14.5	5.2	4.8	3.4	3.1
		LPM	10.4	9.1	13.6	19.7	36.5
K	SG / Nodular Cast Iron	Bar	15.5	7.2	6.2	6.2	5.5
		LPM	10.7	10.8	15.4	26.5	48.7
	Grey / White Iron	Bar	15.5	7.2	6.2	6.2	5.5
		LPM	10.7	10.8	15.4	26.5	48.7
N	Cast Aluminium	Bar	24.1	22	21.7	19.6	13.8
		LPM	13.4	18.8	29	47.2	77
	Wrought Aluminium	Bar	24.1	22	21.7	19.6	13.8
		LPM	13.4	18.8	29	47.2	77
	Aluminium Bronze	Bar	20	16.5	16.5	15.2	12
		LPM	12.2	16.3	25.2	41.5	71.9
	Brass	Bar	24.1	22	21.7	19.6	13.8
		LPM	13.4	18.8	29	47.2	77
Copper	Bar	20	16.5	16.5	15.2	12	
	LPM	12.2	16.3	25.2	41.5	71.9	

### Deep Hole Drilling Coolant Adjustment

	Holder Length				
	Extended	Long	Long Plus	XL	3XL
Pressure and Flow	1.3	1.5	2	2	3

### Recommended Coolant Example

If the recommended pressure and flow is 12 Bar and 22 LPM for a standard length holder, then the adjusted pressure and flow for a 3XL holder would be 36 Bar and 66 LPM.

$12 \cdot 3 = 36 \text{ Bar}$	$22 \cdot 3 = 66 \text{ LPM}$
-------------------------------	-------------------------------

#### **⚠ WARNING** Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.



Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

**IMPORTANT:** The coolant pressure and flow rate recommendations above represent a good approximation to obtain optimum tool life and chip evacuation at Allied Machine recommended speeds and feeds. If lower coolant capabilities exist in a drilling application, the T-A® drilling system will still function at reduced penetration rates. Contact our Application Engineering department for a more specific recommendation of coolant requirements and/or speeds and feeds.

A  
DRILLING  
B  
BORING  
C  
REAMING  
D  
BURNISHING  
E  
THREADING  
X  
SPECIALS

## GEN2 T-A Recommended Drilling Data | Imperial (inch)

### HSS Inserts

ISO	Material	Hardness (BHN)	HSS Grade	SFM		Feed Rate (IPR) by Diameter	
				 TiN	 AM200®	3/8" - 1/2"	33/64" - 11/16"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	HSS	200	325	0.008	0.012
		150 - 200	HSS	180	300	0.007	0.011
		200 - 250	HSS	160	280	0.006	0.010
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	HSS	170	290	0.008 ❖	0.010
		125 - 175	HSS	160	275	0.007 ❖	0.010
		175 - 225	HSS	150	260	0.006 ❖	0.009
		225 - 275	HSS	140	240	0.005 ❖	0.009
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 175	HSS	160	275	0.007	0.010
		175 - 225	HSS	150	260	0.006	0.009
		225 - 275	HSS	140	240	0.006	0.009
		275 - 325	SC	130	225	0.005	0.008
	Alloy Steel 4140, 5140, 8640, etc.	125 - 175	HSS	150	240	0.007	0.010
175 - 225		HSS	140	225	0.006	0.009	
225 - 275		HSS	130	210	0.006	0.009	
275 - 325		SC	120	195	0.005	0.008	
325 - 375		SC	110	180	0.004	0.007	
High-Strength Alloy 4340, 4330V, 300M, etc.	225 - 300	SC	80	125	0.006 ❖	0.009	
	300 - 350	SC	60	100	0.005 ❖	0.008	
	350 - 400	SC	50	80	0.004 ❖	0.007	
Structural Steel A36, A285, A516, etc.	100 - 150	HSS	140	235	0.008 ❖	0.011	
	150 - 250	HSS	120	190	0.006 ❖	0.010	
	250 - 350	SC	100	160	0.005 ❖	0.009	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	SC	80	125	0.004	0.007	
	200 - 250	SC	60	105	0.004	0.007	
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 220	SC	30	45	0.004 ❖	0.007
		220 - 310	SC	25	40	0.004 ❖	0.006
	Titanium Alloy	140 - 220	SC	35	55	0.004 ❖	0.007
		220 - 310	SC	30	50	0.003 ❖	0.006
	Aerospace Alloy S82	185 - 275	SC	75	110	0.006 ❖	0.008
275 - 350		SC	60	100	0.005 ❖	0.007	
M	Stainless Steel 400 Series 416, 420, etc.	185 - 275	SC	75	110	0.006 ❖	0.008
		275 - 350	SC	60	100	0.005 ❖	0.007
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	SC	75	110	0.003 ❖	0.007
		185 - 275	SC	60	100	0.003 ❖	0.006
	Super Duplex Stainless Steel	135 - 185	SC	60	85	0.003 ❖	0.007
185 - 275		SC	50	70	0.003	0.006	
H	Wear Plate Hardox, AR400, T-1, etc.	400	SC	45	70	0.003 ❖	0.006
		500	SC	35	45	0.002 ❖	0.005
		600	-	-	-	0.004 ❖	0.006
	Hardened Steel	300 - 400	SC	50	95	-	-
400 - 500		SC	35	45	0.002 ❖	0.005	
K	Nodular, Grey, Ductile Cast Iron	120 - 150	HSS	170	290	0.008	0.012
		150 - 200	HSS	150	260	0.007	0.011
		200 - 220	HSS	130	225	0.006	0.009
		220 - 260	SC	110	190	0.005	0.008
		260 - 320	SC	90	155	0.005	0.007
N	Cast Aluminium	30	HSS	600	-	0.009	0.015
		180	HSS	300	-	0.008	0.013
	Wrought Aluminium	30	HSS	600	900	0.005	0.013
		180	HSS	300	650	0.005	0.007
	Aluminium Bronze	100 - 200	SC	170	270	0.006	0.009
		200 - 250	SC	130	210	0.005	0.007
	Brass	100	HSS	300	470	0.007	0.011
Copper	60	SC	130	190	0.003 ❖	0.004	

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

Deep Hole Drilling Speed and Feed Adjustment

	Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	-	0.95	0.90	0.90	0.90

Recommended Speed and Feed Example

If the recommended speed and feed is 200 SFM and 0.008 IPR for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 150 SFM and 0.007 IPR.

$200 \cdot 0.75 = 150 \text{ SFM}$	$0.008 \cdot 0.90 = 0.007 \text{ IPR}$
------------------------------------	--

Formulas

1.	<b>RPM</b>	<b>= (3.82 • SFM) / DIA</b>
	where:	
	RPM	= revolutions per minute (rev/min)
	SFM	= speed (ft/min)
	DIA	= diameter of drill (inch)
2.	<b>IPM</b>	<b>= RPM • IPR</b>
	where:	
	IPM	= inches per minute (in/min)
	RPM	= revolutions per minute (rev/min)
	IPR	= feed rate (in/rev)
3.	<b>SFM</b>	<b>= RPM • 0.262 • DIA</b>
	where:	
	SFM	= speed (ft/min)
	RPM	= revolutions per minute (rev/min)
	DIA	= diameter of drill (inch)

Feed Rate (IPR) by Diameter				
45/64" - 15/16"	31/32" - 1-3/8"	1-13/32" - 1-7/8"	1-29/32" - 2-9/16"	2-19/32" - 4-1/2"
0.016	0.019	0.020	0.023	0.028
0.015	0.017	0.020	0.023	0.028
0.014	0.016	0.020	0.023	0.028
0.014	0.018	0.019	0.023	0.027
0.014	0.017	0.019	0.023	0.027
0.013	0.016	0.018	0.021	0.024
0.013	0.016	0.018	0.021	0.024
0.014	0.017	0.019	0.023	0.027
0.013	0.016	0.018	0.021	0.024
0.013	0.016	0.018	0.021	0.024
0.012	0.015	0.016	0.019	0.022
0.014	0.017	0.017	0.019	0.022
0.013	0.016	0.017	0.019	0.022
0.013	0.016	0.017	0.019	0.022
0.012	0.015	0.015	0.017	0.020
0.011	0.014	0.015	0.017	0.020
0.011	0.013	0.014	0.017	0.020
0.010	0.012	0.014	0.017	0.020
0.009	0.011	0.012	0.015	0.018
0.015	0.017	0.018	0.021	0.026
0.013	0.015	0.016	0.019	0.024
0.012	0.013	0.014	0.017	0.020
0.010	0.012	0.012	0.015	0.017
0.010	0.012	0.012	0.015	0.017
0.009	0.011	0.012	0.015	0.017
0.008	0.010	0.010	0.012	0.014
0.008	0.010	0.012	0.015	0.017
0.007	0.009	0.010	0.012	0.014
0.009	0.011	0.014	0.016	0.020
0.008	0.010	0.012	0.014	0.018
0.009	0.011	0.014	0.016	0.020
0.008	0.010	0.012	0.014	0.018
0.008	0.010	0.012	0.014	0.018
0.008	0.011	0.014	0.016	0.020
0.007	0.010	0.012	0.014	0.018
0.008	0.011	0.014	0.016	0.020
0.007	0.010	0.012	0.014	0.018
0.008	0.009	0.012	0.016	0.018
0.007	0.008	0.010	0.012	0.016
0.009	0.011	0.012	0.016	0.018
-	-	-	-	-
0.007	0.009	0.010	0.012	0.016
0.016	0.020	0.024	0.027	0.030
0.015	0.019	0.022	0.025	0.028
0.013	0.017	0.018	0.021	0.024
0.011	0.014	0.014	0.017	0.020
0.010	0.012	0.012	0.014	0.016
0.018	0.023	0.022	0.025	0.025
0.016	0.020	0.022	0.025	0.025
0.016	0.020	0.022	0.025	0.025
0.012	0.014	0.022	0.025	0.025
0.012	0.015	0.017	0.019	0.021
0.009	0.011	0.014	0.016	0.018
0.013	0.018	0.019	0.021	0.023
0.007	0.010	0.009	0.011	0.012


**⚠ WARNING** Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.


## GEN2 T-A Recommended Drilling Data | Imperial (inch)

### Carbide Inserts

ISO	Material	Hardness (BHN)	Carbide Grade	SFM  AM300®	Feed Rate (IPR) by Diameter					
					3/8" - 1/2"	33/64" - 11/16"	45/64" - 15/16"	31/32" - 1-3/8"		
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	C1	480	0.008	0.012	0.016	0.019		
		150 - 200	C1	415	0.007	0.011	0.015	0.017		
		200 - 250	C1	390	0.006	0.010	0.014	0.016		
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	C1	450	0.008 ❖	0.010	0.014	0.018		
		125 - 175	C1	390	0.007 ❖	0.010	0.014	0.017		
		175 - 225	C1	355	0.006 ❖	0.009	0.013	0.016		
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	225 - 275	C1	310	0.005 ❖	0.009	0.013	0.016		
		125 - 175	C1	390	0.007	0.010	0.014	0.017		
		175 - 225	C1	355	0.006	0.009	0.013	0.016		
	Alloy Steel 4140, 5140, 8640, etc.	225 - 275	C1	310	0.006	0.009	0.013	0.016		
		275 - 325	C1	265	0.005	0.008	0.012	0.015		
		325 - 375	C1	255	0.004	0.007	0.011	0.014		
		125 - 175	C1	375	0.007	0.010	0.014	0.017		
	High-Strength Alloy 4340, 4330V, 300M, etc.	175 - 225	C1	345	0.006	0.009	0.013	0.016		
		225 - 275	C1	310	0.006	0.009	0.013	0.016		
		275 - 325	C1	285	0.005	0.008	0.012	0.015		
	Structural Steel A36, A285, A516, etc.	325 - 375	C1	255	0.004	0.007	0.011	0.014		
		225 - 300	C1	230	0.006 ❖	0.009	0.011	0.013		
300 - 350		C1	205	0.005 ❖	0.008	0.010	0.012			
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	350 - 400	C1	185	0.004 ❖	0.007	0.009	0.011			
	100 - 150	C1	355	0.008 ❖	0.011	0.015	0.017			
	150 - 250	C1	285	0.006 ❖	0.010	0.013	0.015			
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	250 - 350	C1	265	0.005 ❖	0.009	0.012	0.013		
		200 - 250	C1	195	0.007	0.007	0.010	0.012		
	Titanium Alloy	140 - 220	C2	120	0.004 ❖	0.007	0.009	0.011		
		220 - 310	C2	95	0.004 ❖	0.006	0.008	0.010		
	Aerospace Alloy S82	140 - 220	C2	140	0.004 ❖	0.007	0.008	0.011		
		220 - 310	C2	110	0.003 ❖	0.006	0.007	0.009		
	M	Stainless Steel 400 Series 416, 420, etc.	185 - 275	C2	240	0.005 ❖	0.006	0.007	0.009	
			275 - 350	C2	180	0.004 ❖	0.005	0.006	0.008	
		Stainless Steel 300 Series 304, 316, 17-4PH, etc.	185 - 275	C2	240	0.006 ❖	0.007	0.009	0.012	
			135 - 185	C2	240	0.006 ❖	0.007	0.009	0.012	
		Super Duplex Stainless Steel	185 - 275	C2	180	0.005 ❖	0.006	0.008	0.009	
			135 - 185	C2	125	0.005 ❖	0.007	0.008	0.010	
				185 - 275	C2	100	0.004 ❖	0.006	0.007	0.009
				185 - 275	C2	100	0.004 ❖	0.006	0.007	0.009

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

ISO	Material	Hardness (BHN)	Carbide Grade	SFM  AM300®	Feed Rate (IPR) by Diameter			
					3/8" - 1/2"	33/64" - 11/16"	45/64" - 15/16"	31/32" - 1-3/8"
H	Wear Plate Hardox, AR400, T-1, etc.	400	C2	150	0.003 ❖	0.005	0.008	0.010
		500	C2	120	0.002 ❖	0.004	0.006	0.008
		600	C2	100	0.001 ❖	0.003	0.005	0.006
	Hardened Steel	300 - 400	C1	150	0.004 ❖	0.006	0.009	0.011
400 - 500		C1	120	0.003 ❖	0.005	0.008	0.010	
K	Nodular, Grey, Ductile Cast Iron	120 - 150	C2	500	0.008	0.012	0.015	0.019
		150 - 200	C2	480	0.007	0.011	0.013	0.017
		200 - 220	C2	430	0.006	0.009	0.012	0.015
		220 - 260	C2	370	0.005	0.008	0.011	0.013
		260 - 320	C2	335	0.005	0.007	0.010	0.011
N	Cast Aluminium	30	C2	975	0.009	0.015	0.018	0.023
		180	C2	730	0.008	0.013	0.016	0.020
	Wrought Aluminium	30	C2	1385	0.005	0.013	0.016	0.020
		180	C2	975	0.005	0.007	0.012	0.014
	Aluminium Bronze	100 - 200	C2	360	0.006	0.009	0.012	0.015
		200 - 250	C2	300	0.005	0.007	0.009	0.011
	Brass	100	C2	650	0.007	0.011	0.013	0.018
Copper	60	C2	420	0.003 ❖	0.004	0.007	0.010	

❖ Contact our Application Engineering department for assistance when machining these materials

**Deep Hole Drilling Speed and Feed Adjustment**

	1. Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	-	0.95	0.90	0.90	0.90

**Recommended Speed and Feed Example**

If the recommended speed and feed is 200 SFM and 0.008 IPR for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 150 SFM and 0.007 IPR.

$$200 \cdot 0.75 = 150 \text{ SFM}$$

$$0.008 \cdot 0.90 = 0.007 \text{ IPR}$$

**Formulas**




1. <b>RPM = (3.82 • SFM) / DIA</b> where: RPM = revolutions per minute (rev/min) SFM = speed (ft/min) DIA = diameter of drill (inch)	2. <b>IPM = RPM • IPR</b> where: IPM = inches per minute (in/min) RPM = revolutions per minute (rev/min) IPR = feed rate (in/rev)	3. <b>SFM = RPM • 0.262 • DIA</b> where: SFM = speed (ft/min) RPM = revolutions per minute (rev/min) DIA = diameter of drill (inch)
--	---	---

**1. WARNING** Tool failure can cause serious injury. To prevent:  
 - When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.  
 - Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.  
 Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.



## T-A Recommended Drilling Data | Imperial (inch)

### HSS Inserts

ISO	Material	Hardness (BHN)	HSS Grade	SFM			Feed Rate (IPR) by Diameter	
				 TiN	 TiAlN	 TiCN	3/8" - 1/2"	33/64" - 11/16"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	HSS	200	280	260	0.007	0.010
		150 - 200	HSS	180	260	235	0.007	0.010
		200 - 250	HSS	160	240	210	0.006	0.010
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	HSS	170	250	220	0.006 ❖	0.009
		125 - 175	HSS	160	240	210	0.006 ❖	0.009
		175 - 225	HSS	150	225	195	0.005 ❖	0.008
		225 - 275	HSS	140	210	180	0.005 ❖	0.008
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 175	HSS	160	240	210	0.006	0.009
		175 - 225	HSS	150	225	195	0.005	0.008
		225 - 275	HSS	140	210	180	0.005	0.008
		275 - 325	SC, PC	130	195	170	0.004	0.007
	Alloy Steel 4140, 5140, 8640, etc.	125 - 175	HSS	150	210	195	0.006	0.008
		175 - 225	HSS	140	195	180	0.005	0.008
		225 - 275	HSS	130	180	170	0.005	0.007
		275 - 325	SC, PC	120	170	155	0.004	0.006
		325 - 375	SC, PC	110	155	145	0.003	0.006
	High-Strength Alloy 4340, 4330V, 300M, etc.	225 - 300	SC, PC	80	110	100	0.005 ❖	0.007
		300 - 350	SC, PC	60	85	80	0.004 ❖	0.007
350 - 400		PC	50	70	65	0.003 ❖	0.006	
Structural Steel A36, A285, A516, etc.	100 - 150	HSS	140	200	180	0.006 ❖	0.010	
	150 - 250	HSS	120	170	155	0.005 ❖	0.009	
	250 - 350	SC, PC	100	140	130	0.003 ❖	0.008	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	SC	80	110	105	0.004	0.006	
	200 - 250	SC, PC	60	90	85	0.004	0.006	
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 220	SC, PC	30	40	35	0.003 ❖	0.007
		220 - 310	PC	25	35	30	0.003 ❖	0.006
	Titanium Alloy	140 - 220	SC, PC	35	50	45	0.003 ❖	0.007
		220 - 310	PC	30	45	35	0.003 ❖	0.006
	Aerospace Alloy S82	185 - 275	SC, PC	75	105	95	0.006 ❖	0.008
275 - 350		SC, PC	60	90	80	0.005 ❖	0.007	
M	Stainless Steel 400 Series 416, 420, etc.	185 - 275	SC, PC	75	105	95	0.009	0.010
		275 - 350	SC, PC	60	90	80	0.008	0.009
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	SC, PC	75	105	95	0.007	0.007
		185 - 275	SC, PC	60	90	80	0.006	0.006
	Super Duplex Stainless Steel	135 - 185	SC, PC	60	80	70	0.005	0.005
185 - 275		SC, PC	50	65	60	0.004	0.005	
H	Wear Plate Hardox, AR400, T-1, etc.	400	SC, PC	45	70	55	0.003 ❖	0.006
		500	PC	35	45	40	0.002 ❖	0.005
		600	-	-	-	-	-	-
	Hardened Steel	300 - 400	PC	50	95	70	0.003 ❖	0.006
400 - 500		PC	35	45	40	0.002 ❖	0.005	
K	Nodular, Grey, Ductile Cast Iron	120 - 150	HSS	170	250	220	0.007	0.012
		150 - 200	HSS	150	225	195	0.006	0.011
		200 - 220	HSS	130	195	170	0.006	0.009
		220 - 260	SC, PC	110	165	145	0.005	0.007
		260 - 320	SC, PC	90	135	120	0.004	0.006
N	Cast Aluminium	30	HSS	600	850	750	0.008	0.013
		180	HSS	300	450	400	0.008	0.013
	Wrought Aluminium	30	HSS	600	850	750	0.004	0.006
		180	HSS	300	450	400	0.008	0.013
	Aluminium Bronze	100 - 200	SC	170	250	220	0.006	0.011
		200 - 250	SC	130	190	170	0.005	0.007
	Brass	100	HSS	300	445	400	0.007	0.012
Copper	60	SC	130	165	150	0.002 ❖	0.003	

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

**Deep Hole Drilling Speed and Feed Adjustment**

Holder Length					
	Extended	Long	Long Plus	XL	3XL
<b>Speed</b>	0.90	0.85	0.80	0.80	0.75
<b>Feed</b>	-	0.95	0.90	0.90	0.90

**Recommended Speed and Feed Example**

If the recommended speed and feed is 200 SFM and 0.008 IPR for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 150 SFM and 0.007 IPR.

$200 \cdot 0.75 = 150 \text{ SFM}$	$0.008 \cdot 0.90 = 0.007 \text{ IPR}$
------------------------------------	--

**Formulas**




1.	<b>RPM</b>	<b>= (3.82 • SFM) / DIA</b>
	where:	
	RPM	= revolutions per minute (rev/min)
	SFM	= speed (ft/min)
	DIA	= diameter of drill (inch)
2.	<b>IPM</b>	<b>= RPM • IPR</b>
	where:	
	IPM	= inches per minute (in/min)
	RPM	= revolutions per minute (rev/min)
	IPR	= feed rate (in/rev)
3.	<b>SFM</b>	<b>= RPM • 0.262 • DIA</b>
	where:	
	SFM	= speed (ft/min)
	RPM	= revolutions per minute (rev/min)
	DIA	= diameter of drill (inch)

Feed Rate (IPR) by Diameter				
45/64" - 15/16"	31/32" - 1-3/8"	1-13/32" - 1-7/8"	1-29/32" - 2-9/16"	2-19/32" - 4-1/2"
0.013	0.016	0.020	0.023	0.028
0.013	0.016	0.020	0.023	0.028
0.013	0.016	0.020	0.023	0.028
0.012	0.015	0.019	0.023	0.027
0.012	0.015	0.019	0.023	0.027
0.010	0.014	0.018	0.021	0.024
0.010	0.014	0.018	0.021	0.024
0.012	0.015	0.019	0.023	0.027
0.010	0.014	0.018	0.021	0.024
0.010	0.014	0.018	0.021	0.024
0.009	0.012	0.016	0.019	0.022
0.010	0.014	0.017	0.019	0.022
0.010	0.014	0.017	0.019	0.022
0.010	0.014	0.017	0.019	0.022
0.009	0.012	0.015	0.017	0.020
0.009	0.012	0.015	0.017	0.020
0.009	0.010	0.014	0.017	0.020
0.009	0.010	0.014	0.017	0.020
0.008	0.009	0.012	0.015	0.018
0.012	0.014	0.018	0.021	0.026
0.010	0.012	0.016	0.019	0.024
0.009	0.010	0.014	0.017	0.020
0.008	0.010	0.012	0.015	0.017
0.008	0.010	0.012	0.015	0.017
0.008	0.010	0.012	0.015	-
0.007	0.008	0.010	0.012	-
0.008	0.010	0.012	0.015	-
0.007	0.008	0.010	0.012	-
0.009	0.010	0.014	0.016	0.020
0.008	0.008	0.012	0.014	0.018
0.011	0.012	0.013	0.014	0.015
0.010	0.011	0.012	0.013	0.014
0.008	0.008	0.009	0.009	0.010
0.007	0.007	0.008	0.008	0.009
0.006	0.006	0.007	0.008	0.008
0.005	0.006	0.006	0.007	0.007
0.008	0.009	0.012	0.016	0.018
0.007	0.008	0.010	0.012	0.016
-	-	-	-	-
0.008	0.009	0.012	0.016	0.018
0.007	0.008	0.010	0.012	0.016
0.016	0.020	0.024	0.027	0.030
0.014	0.018	0.022	0.025	0.028
0.012	0.016	0.018	0.021	0.024
0.009	0.012	0.014	0.017	0.020
0.007	0.009	0.012	0.014	0.016
0.016	0.020	0.022	0.025	0.025
0.016	0.018	0.022	0.025	0.025
0.010	0.012	0.022	0.025	0.025
0.016	0.018	0.022	0.025	0.025
0.014	0.018	0.022	0.026	0.028
0.009	0.012	0.014	0.017	0.020
0.016	0.020	0.024	0.028	0.030
0.006	0.008	0.012	0.014	0.016

**1. WARNING** Tool failure can cause serious injury. To prevent:  
 - When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.  
 - Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.  
 Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.




T-A Recommended Drilling Data | Imperial (inch)

Carbide Inserts

ISO	Material	Hardness (BHN)	Carbide Grade	SFM			Feed Rate (IPR) by Diameter				
				 TiN	 TiAlN	 TiCN	3/8" - 1/2"	33/64" - 11/16"	45/64" - 15/16"	31/32" - 1-3/8"	1-13/32" - 1-7/8"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	C5	320	420	375	0.008	0.012	0.015	0.018	0.021
		150 - 200	C5	280	360	325	0.007	0.011	0.014	0.016	0.019
		200 - 250	C5	260	340	295	0.006	0.010	0.013	0.015	0.017
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	C5	300	390	360	0.008 ❖	0.010	0.013	0.017	0.019
		125 - 175	C5	260	340	295	0.007 ❖	0.010	0.013	0.016	0.018
		175 - 225	C5	240	310	270	0.006 ❖	0.009	0.012	0.015	0.017
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	225 - 275	C5	210	270	245	0.005 ❖	0.009	0.012	0.015	0.017
		125 - 175	C5	260	340	295	0.007	0.010	0.013	0.016	0.018
		175 - 225	C5	240	310	275	0.006	0.009	0.012	0.015	0.017
	Alloy Steel 4140, 5140, 8640, etc.	225 - 275	C5	210	270	235	0.006	0.009	0.012	0.015	0.017
		275 - 325	C5	180	230	205	0.005	0.008	0.011	0.014	0.016
		125 - 175	C5	250	325	285	0.007	0.010	0.013	0.016	0.018
175 - 225		C5	230	300	260	0.006	0.009	0.012	0.015	0.017	
High-Strength Alloy 4340, 4330V, 300M, etc.	225 - 275	C5	210	270	235	0.006	0.009	0.012	0.015	0.017	
	275 - 325	C5	200	250	225	0.005	0.008	0.011	0.014	0.016	
	325 - 375	C5	170	220	195	0.004	0.007	0.010	0.013	0.015	
Structural Steel A36, A285, A516, etc.	225 - 300	C5	160	200	180	0.006 ❖	0.009	0.010	0.012	0.015	
	300 - 350	C5	140	180	160	0.005 ❖	0.008	0.009	0.011	0.014	
	350 - 400	C5	120	160	140	0.004 ❖	0.007	0.008	0.010	0.012	
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	100 - 150	C5	240	310	275	0.008 ❖	0.011	0.014	0.016	0.018	
	150 - 250	C5	200	250	225	0.006 ❖	0.010	0.012	0.014	0.016	
	250 - 350	C5	180	230	205	0.005 ❖	0.009	0.011	0.012	0.014	
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	150 - 200	C5	160	220	190	0.004	0.007	0.009	0.011	0.013
		200 - 250	C5	120	170	145	0.004	0.007	0.009	0.011	0.013
	Titanium Alloy	140 - 220	C2	80	105	90	0.004 ❖	0.007	0.009	0.011	0.013
		220 - 310	C2	60	85	70	0.004 ❖	0.006	0.008	0.010	0.012
	Aerospace Alloy S82	140 - 220	C2	100	125	105	0.004 ❖	0.007	0.009	0.011	0.013
		220 - 310	C2	80	110	90	0.004 ❖	0.006	0.008	0.010	0.012
M	Stainless Steel 400 Series 416, 420, etc.	185 - 275	C2	160	210	185	0.007 ❖	0.008	0.011	0.014	0.016
		275 - 350	C2	120	160	140	0.006 ❖	0.007	0.010	0.012	0.014
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	C2	160	210	185	0.005 ❖	0.007	0.009	0.010	0.012
		185 - 275	C2	120	160	140	0.004 ❖	0.006	0.008	0.009	0.010
	Super Duplex Stainless Steel	135 - 185	C2	80	110	95	0.004 ❖	0.007	0.008	0.009	0.011
		185 - 275	C2	60	80	70	0.003 ❖	0.006	0.007	0.008	0.009

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

ISO	Material	Hardness (BHN)	Carbide Grade	SFM			Feed Rate (IPR) by Diameter				
				 TiN	 TiAlN	 TiCN	3/8" - 1/2"	33/64" - 11/16"	45/64" - 15/16"	31/32" - 1-3/8"	1-13/32" - 1-7/8"
H	Wear Plate Hardox, AR400, T-1, etc.	400	C5	75	115	100	0.003 ❖	0.006	0.008	0.010	0.012
		500	C5	50	85	70	0.002 ❖	0.005	0.006	0.008	0.010
		600	C5	35	75	55	0.001 ❖	0.004	0.005	0.006	0.008
	Hardened Steel	300 - 400	C5	110	140	130	0.004 ❖	0.006	0.009	0.011	0.013
400 - 500		C5	65	85	75	0.003 ❖	0.005	0.008	0.009	0.011	
K	Nodular, Grey, Ductile Cast Iron	120 - 150	C2, C3	320	460	415	0.008	0.012	0.015	0.019	0.023
		150 - 200	C2, C3	270	400	335	0.007	0.011	0.013	0.017	0.021
		200 - 220	C2, C3	240	360	305	0.006	0.009	0.012	0.015	0.018
		220 - 260	C2, C3	210	310	260	0.005	0.008	0.011	0.013	0.015
		260 - 320	C2, C3	180	270	225	0.005	0.007	0.010	0.011	0.013
N	Cast Aluminium	30	C2	1200	1500	1330	0.010	0.013	0.018	0.020	0.022
		180	C2	800	1000	900	0.009	0.013	0.016	0.018	0.020
	Wrought Aluminium	30	C2	1200	1500	1330	0.004	0.006	0.010	0.012	0.014
		180	C2	800	1000	900	0.008	0.013	0.014	0.018	0.020
	Aluminium Bronze	100 - 200	C2	275	360	325	0.005	0.008	0.010	0.014	0.017
		200 - 250	C2	210	305	260	0.004	0.007	0.007	0.010	0.013
	Brass	100	C2	425	600	520	0.006	0.009	0.011	0.015	0.018
	Copper	60	C2	260	390	325	0.002 ❖	0.003	0.004	0.006	0.010

❖ Contact our Application Engineering department for assistance when machining these materials

**Deep Hole Drilling Speed and Feed Adjustment**

	⚠ Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	-	0.95	0.90	0.90	0.90

**Recommended Speed and Feed Example**

If the recommended speed and feed is 200 SFM and 0.008 IPR for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 150 SFM and 0.007 IPR.

$200 \cdot 0.75 = 150 \text{ SFM}$	$0.008 \cdot 0.90 = 0.007 \text{ IPR}$
------------------------------------	--

**Formulas**

<p>1. <b>RPM = (3.82 • SFM) / DIA</b></p> <p>where:</p> <p>RPM = revolutions per minute (rev/min)</p> <p>SFM = speed (ft/min)</p> <p>DIA = diameter of drill (inch)</p>	<p>2. <b>IPM = RPM • IPR</b></p> <p>where:</p> <p>IPM = inches per minute (in/min)</p> <p>RPM = revolutions per minute (rev/min)</p> <p>IPR = feed rate (in/rev)</p>	<p>3. <b>SFM = RPM • 0.262 • DIA</b></p> <p>where:</p> <p>SFM = speed (ft/min)</p> <p>RPM = revolutions per minute (rev/min)</p> <p>DIA = diameter of drill (inch)</p>
---	--	--

**⚠ WARNING** Tool failure can cause serious injury. To prevent:





- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

A DRILLING  
B BORING  
C REAMING  
D BURNISHING  
E THREADING  
X SPECIALS

## T-A Recommended Drilling Data | Imperial (inch)

HSS Inserts | Flat Bottom Geometry

ISO	Material	Hardness (BHN)	HSS Grade	SFM			
				 TiN	 TiAlN	 TiCN	 AM200®
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	HSS	170	250	230	290
		150 - 200	HSS	155	230	205	265
		200 - 250	HSS	140	210	185	245
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	HSS	150	220	195	255
		125 - 175	HSS	140	210	185	245
		175 - 225	HSS	130	195	175	225
		225 - 275	HSS	120	185	155	215
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 175	HSS	140	210	185	245
		175 - 225	HSS	130	195	175	225
		225 - 275	HSS	120	185	155	215
		275 - 325	SC	110	175	150	205
	Alloy Steel 4140, 5140, 8640, etc.	125 - 175	HSS	130	185	175	215
		175 - 225	HSS	120	175	155	205
		225 - 275	HSS	110	155	145	180
		275 - 325	SC	105	145	135	170
		325 - 375	SC	95	135	125	155
	High-Strength Alloy 4340, 4330V, 300M, etc.	225 - 300	SC	70	95	85	110
		300 - 350	SC	50	75	70	90
		350 - 400	SC	45	65	60	75
	Structural Steel A36, A285, A516, etc.	100 - 150	HSS	120	170	155	195
		150 - 250	HSS	105	145	135	170
		250 - 350	SC	85	120	110	140
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 200	SC	70	95	90	110
		200 - 250	SC	50	80	75	95
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 220	SC	25	35	30	40
		220 - 310	SC	20	30	25	35
	Titanium Alloy	140 - 220	SC	35	45	40	50
		220 - 310	SC	26	40	35	45
Aerospace Alloy S82	185 - 275	SC	65	90	85	110	
	275 - 350	SC	50	80	70	90	
M	Stainless Steel 400 Series 416, 420, etc.	185 - 275	SC	65	90	85	110
		275 - 350	SC	50	80	70	90
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	SC	65	90	85	110
		185 - 275	SC	50	80	70	90
	Super Duplex Stainless Steel	135 - 185	SC	65	90	85	110
185 - 275	SC	50	80	70	90		
H	Wear Plate Hardox, AR400, T-1, etc.	400	SC	-	-	-	-
		500	SC	-	-	-	-
		600	-	-	-	-	-
	Hardened Steel	300 - 400	SC	45	65	60	80
400 - 500		SC	25	40	35	45	
K	Nodular, Grey, Ductile Cast Iron	120 - 150	HSS	150	220	195	255
		150 - 200	HSS	130	195	175	225
		200 - 220	HSS	110	175	150	205
		220 - 260	SC	95	150	125	175
		260 - 320	SC	80	120	105	140
N	Cast Aluminium	30	HSS	520	750	650	-
		180	HSS	260	400	350	-
	Wrought Aluminium	30	HSS	520	750	650	850
		180	HSS	260	400	350	450
	Aluminium Bronze	100 - 200	SC	130	190	175	230
		200 - 250	SC	95	150	125	165
	Brass	100	HSS	150	220	190	250
Copper	60	SC	115	150	130	170	





❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.



## T-A Recommended Drilling Data | Imperial (inch)





Carbide Inserts | Flat Bottom Geometry

ISO	Material	Hardness (BHN)	Carbide Grade	SFM				Feed Rate (IPR) by Diameter			
				 TiN	 TiAlN	 TiCN	 AM200®	3/8" - 1/2"	33/64" - 11/16"	45/64" - 15/16"	31/32" - 1-7/8"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	100 - 150	C2	270	380	325	425	0.007	0.010	0.013	0.015
		150 - 200	C2	240	320	280	375	0.006	0.009	0.012	0.014
		200 - 250	C2	220	300	260	350	0.005	0.009	0.011	0.013
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 125	C2	260	345	315	410	0.007 ❖	0.009	0.011	0.014
		125 - 175	C2	220	300	260	350	0.006 ❖	0.009	0.011	0.014
		175 - 225	C2	200	280	235	320	0.005 ❖	0.008	0.010	0.013
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	225 - 275	C2	180	240	215	285	0.004 ❖	0.008	0.010	0.013
		125 - 175	C2	220	300	260	350	0.006	0.009	0.011	0.014
		175 - 225	C2	200	280	240	320	0.005	0.008	0.010	0.013
	Alloy Steel 4140, 5140, 8640, etc.	225 - 275	C2	180	240	210	285	0.005	0.008	0.010	0.013
		275 - 325	C2	150	210	180	240	0.004	0.007	0.009	0.012
		125 - 175	C2	215	290	250	340	0.006	0.009	0.011	0.014
		175 - 225	C2	200	270	230	320	0.005	0.008	0.010	0.013
		225 - 275	C2	180	230	205	290	0.005	0.008	0.010	0.013
	High-Strength Alloy 4340, 4330V, 300M, etc.	275 - 325	C2	175	215	190	280	0.004	0.007	0.009	0.012
		325 - 375	C2	145	190	170	230	0.003	0.006	0.009	0.011
		225 - 300	C2	140	170	160	220	0.005 ❖	0.008	0.009	0.010
	Structural Steel A36, A285, A516, etc.	300 - 350	C2	120	160	140	190	0.004 ❖	0.007	0.008	0.009
		350 - 400	C2	100	145	120	160	0.003 ❖	0.006	0.007	0.009
		100 - 150	C2	205	265	240	325	0.007 ❖	0.009	0.012	0.014
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 250	C2	170	215	200	270	0.005 ❖	0.009	0.010	0.012	
	250 - 350	C2	155	200	180	240	0.004 ❖	0.008	0.009	0.010	
	150 - 200	C2	140	190	160	220	0.003	0.006	0.008	0.009	
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	200 - 250	C2	100	150	120	160	0.003	0.006	0.008	0.009
		140 - 220	C2	70	90	80	110	0.003 ❖	0.006	0.008	0.009
	Titanium Alloy	220 - 310	C2	50	70	60	80	0.003 ❖	0.005	0.007	0.009
		140 - 220	C2	85	110	90	130	0.003 ❖	0.005	0.006	0.008
	Aerospace Alloy S82	220 - 310	C2	70	95	80	100	0.003 ❖	0.004	0.005	0.007
185 - 275		C2	140	120	165	130	0.006 ❖	0.006	0.010	0.012	
M	Stainless Steel 400 Series 416, 420, etc.	275 - 350	C2	110	140	125	160	0.005 ❖	0.007	0.009	0.010
		185 - 275	C2	70	90	80	105	0.004 ❖	0.006	0.007	0.009
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 185	C2	90	120	110	130	0.005 ❖	0.007	0.008	0.010
		135 - 185	C2	70	95	85	110	0.004 ❖	0.006	0.007	0.008
	Super Duplex Stainless Steel	185 - 275	C2	55	70	60	85	0.003 ❖	0.005	0.006	0.007
		135 - 185	C2	70	95	85	110	0.004 ❖	0.006	0.007	0.008

❖ Contact our Application Engineering department for assistance when machining these materials

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.



ISO	Material	Hardness (BHN)	Carbide Grade	SFM				Feed Rate (IPR) by Diameter			
				 TiN	 TiAlN	 TiCN	 AM200®	3/8" - 1/2"	33/64" - 11/16"	45/64" - 15/16"	31/32" - 1-7/8"
H	Wear Plate Hardox, AR400, T-1, etc.	400	C2	65	100	85	130	0.003 ❖	0.004	0.006	0.008
		500	C2	45	75	60	100	0.002 ❖	0.003	0.005	0.006
		600	C2	35	65	45	80	0.001 ❖	0.002	0.004	0.005
	Hardened Steel	300 - 400	C2	100	125	110	135	0.004 ❖	0.006	0.007	0.009
400 - 500		C2	60	75	65	110	0.003 ❖	0.005	0.006	0.007	
K	Nodular, Grey, Ductile Cast Iron	120 - 150	C2	270	405	360	450	0.007	0.010	0.013	0.016
		150 - 200	C2	230	350	290	390	0.006	0.009	0.011	0.014
		200 - 220	C2	200	320	260	350	0.005	0.008	0.010	0.013
		220 - 260	C2	180	270	220	300	0.004	0.007	0.009	0.011
		260 - 320	C2	160	240	200	265	0.004	0.006	0.009	0.009
N	Cast Aluminium	30	C2	520	750	650	-	0.009	0.013	0.016	0.017
		180	C2	260	400	350	-	0.008	0.012	0.014	0.015
	Wrought Aluminium	30	C2	950	1200	1070	1270	0.005	0.007	0.009	0.010
		180	C2	630	800	715	850	0.004	0.006	0.008	0.009
	Aluminium Bronze	100 - 200	C2	240	310	280	340	0.004	0.006	0.008	0.011
		200 - 250	C2	180	265	220	285	0.003	0.005	0.006	0.008
	Brass	100	C2	370	520	450	600	0.005	0.006	0.008	0.012
Copper	60	C2	220	345	280	380	0.002 ❖	0.002	0.003	0.005	

❖ Contact our Application Engineering department for assistance when machining these materials

**Deep Hole Drilling Speed and Feed Adjustment**

	⚠ Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	-	0.95	0.90	0.90	0.90

**Recommended Speed and Feed Example**

If the recommended speed and feed is 200 SFM and 0.008 IPR for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 150 SFM and 0.007 IPR.

$$200 \cdot 0.75 = 150 \text{ SFM}$$

$$0.008 \cdot 0.90 = 0.007 \text{ IPR}$$


**Formulas**

1. <b>RPM = (3.82 • SFM) / DIA</b> <i>where:</i> RPM = revolutions per minute (rev/min) SFM = speed (ft/min) DIA = diameter of drill (inch)	2. <b>IPM = RPM • IPR</b> <i>where:</i> IPM = inches per minute (in/min) RPM = revolutions per minute (rev/min) IPR = feed rate (in/rev)	3. <b>SFM = RPM • 0.262 • DIA</b> <i>where:</i> SFM = speed (ft/min) RPM = revolutions per minute (rev/min) DIA = diameter of drill (inch)
---	--	--

**⚠ WARNING** Tool failure can cause serious injury. To prevent:  
 - When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.  
 - Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.  
 Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

## T-A Recommended Drilling Data | Imperial (inch)

Carbide Inserts | Diamond Coating

	Material	Carbide Grade	SFM  Diamond Coating	Feed Rate (IPR) by Diameter			
				3/8" - 1/2"	33/64" - 11/16"	45/64" - 15/16"	31/32" - 1-3/8"
A DRILLING B BORING	<b>Polymer Matrix Composites</b>						
	Carbon (hard)	N2	1000 - 1500	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Carbon Fiber	N2	1000 - 1500	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Carbon / Glass Fiber	N2	1000 - 1500	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Fiberglass	N2	1000 - 1500	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Graphite	N2	1000 - 1500	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Plastics	N2	250 - 1000	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Epoxy Resin	N2	250 - 1000	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Bismaleimide Resin	N2	250 - 1000	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Polyester Resin	N2	250 - 1000	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Phenolic Resin	N2	250 - 1000	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
Rubber	N2	250 - 1000	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014	
C REAMING	<b>Metal Matrix Composites</b>						
	Aluminium	N2	1000	0.008	0.013	0.016	0.020
	Si < 10%	N2	1000	0.008	0.013	0.016	0.020
	10% < Si < 15%	N2	850 - 1000	0.008	0.013	0.016	0.020
	15% < Si < 20%	N2	650 - 850	0.008	0.013	0.016	0.020
	20% < Si < 25%	N2	500 - 650	0.008	0.013	0.016	0.020
	25% < Si	N2	200 - 500	0.008	0.013	0.016	0.020
	Brass	N2	250 - 500	0.008	0.013	0.016	0.020
	Bronze	N2	250 - 500	0.008	0.013	0.016	0.020
	Copper	N2	100 - 250	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Copper Alloys	N2	100 - 250	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Lead Alloys	N2	100 - 250	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Magnesium Alloys	N2	100 - 250	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
Precious Metals	N2	100 - 250	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014	
D BURNISHING	<b>Ceramic Matrix Composites</b>						
	Carbide (green)	N2	50 - 250	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Ceramic (green)	N2	50 - 250	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014
	Ceramic (pre-sintered)	N2	50 - 250	0.004 - 0.006	0.008 - 0.010	0.010 - 0.012	0.012 - 0.014

### Deep Hole Drilling Speed and Feed Adjustment

	⚠ Holder Length				
	Extended	Long	Long Plus	XL	3XL
Speed	0.90	0.85	0.80	0.80	0.75
Feed	-	0.95	0.90	0.90	0.90

### Recommended Speed and Feed Example

If the recommended speed and feed is 200 SFM and 0.008 IPR for a standard length holder, then the speed and feed using a 3XL holder in the same application would be 150 SFM and 0.007 IPR.

$$200 \cdot 0.75 = 150 \text{ SFM}$$

$$0.008 \cdot 0.90 = 0.007 \text{ IPR}$$

### ⚠ WARNING Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

**IMPORTANT:** The speeds and feeds listed above are a general starting point for all applications. Refer to the Coolant Recommendation charts for coolant requirements to run at the recommended speeds and feeds. Factory technical assistance is available through our Application Engineering department. See adjustment examples on the following page.

A  
DRILLING  
B  
BORING  
C  
REAMING  
D  
BURNISHING  
E  
THREADING  
X  
SPECIALS

## Tap Drill Information and Formulas | Imperial (inch)

### American - Unified Inch Screw Thread

Tap Size	Tap Drill Size	Decimal Equivalent	* Theo % Thread	Probable Mean Oversize	Probable Hole Size	** Probable % Thread
7/16 - 20	W	0.3860	79%	0.003"	0.3890"	75%
7/16 - 20	25/64"	0.3906	72%	0.003"	0.3936"	68%
1/2 - 13	10.5 mm	0.4134	87%	0.003"	0.4164"	84%
1/2 - 13	27/64"	0.4219	78%	0.003"	0.4249"	75%
1/2 - 13	7/16"	0.4375	63%	0.003"	0.4405"	60%
1/2 - 20	29/64"	0.4531	72%	0.003"	0.4561"	68%
9/16 - 12	15/32"	0.4688	87%	0.003"	0.4718"	84%
9/16 - 12	12.0 mm	0.4724	72%	0.003"	0.4874"	69%
9/16 - 12	31/64"	0.4844	83%	0.003"	0.4754"	80%
9/16 - 18	1/2"	0.5000"	87%	0.003"	0.5030"	82%
9/16 - 18	13.0 mm	0.5118"	70%	0.003"	0.5148"	66%
9/16 - 18	31/64"	0.5156"	65%	0.003"	0.5186"	61%
5/8 - 11	17/32"	0.5313"	79%	0.003"	0.5343"	77%
5/8 - 12	35/64"	0.5469"	72%	0.003"	0.5499"	69%
5/8 - 18	9/16"	0.5625"	87%	0.003"	0.5655"	82%
5/8 - 18	14.5 mm	0.5709"	75%	0.003"	0.5739"	75%
5/8 - 18	37/64"	0.5781"	65%	0.003"	0.5811"	70%
11/16 - 12	39/64"	0.6094"	72%	0.003"	0.6124"	69%
3/4 - 10	41/64"	0.6406"	84%	0.003"	0.6436"	82%
3/4 - 10	16.5 mm	0.6496"	77%	0.003"	0.6526"	75%
3/4 - 10	21/32"	0.6563"	72%	0.003"	0.6593"	70%
3/4 - 12	43/64"	0.6719"	72%	0.003"	0.6749"	69%
3/4 - 16	11/16"	0.6875"	77%	0.003"	0.6905"	73%
3/4 - 16	17.5 mm	0.6890"	75%	0.003"	0.6920"	71%
7/8 - 9	49/64"	0.7656"	76%	0.003"	0.7686"	74%
7/8 - 9	25/32"	0.7813"	65%	0.003"	0.7843"	63%
7/8 - 14	51/64"	0.7969"	84%	0.003"	0.7999"	81%
7/8 - 14	13/16"	0.8125"	67%	0.003"	0.8155"	64%
15/16 - 12	55/64"	0.8594"	72%	0.003"	0.8624"	69%
15/16 - 20	57/64"	0.8906"	72%	0.003"	0.8936"	68%
1 - 8	22.0 mm	0.8661"	82%	0.003"	0.8691"	81%
1 - 8	7/8"	0.8750"	77%	0.003"	0.8780"	75%
1 - 8	57/64"	0.8906"	67%	0.003"	0.8936"	65%
1 - 12	29/32"	0.9063"	87%	0.003"	0.9093"	84%
1 - 12	59/64"	0.9219"	72%	0.003"	0.9249"	69%
1 - 14	15/16"	0.9375"	67%	0.003"	0.9405"	64%
1-1/8 - 12	1-1/32"	1.0313"	87%	0.003"	1.0343"	84%
1-1/8 - 12	1-3/64"	1.0469"	72%	0.003"	1.0499"	69%
1-1/4 - 7	1-7/64"	1.1094"	76%	0.003"	1.1124"	74%
24 x 2	7/8"	0.8750"	68%	0.003"	0.8780"	65%
27 x 3	24.0 mm	0.9449"	77%	0.003"	0.9403"	75%

### Taper Pipe Thread (NPT)

Tap Size	Tap Drill Size	Decimal Equivalent	Theo % Thread*	Probable Mean Oversize	Probable Hole Size	Probable % Thread**
1/4 - 18	7/16	0.4375	-	0.003	0.4405	-
3/8 - 18	9/16	0.5625	-	0.003	0.5655	-
1/2 - 14	45/64	0.7031	-	0.003	0.7061	-
3/4 - 14	29/32	0.9063	-	0.003	0.9093	-

\* Based on nominal tap drill diameter

\*\* Based on 0.003" probable mean oversize

To calculate the percent of full thread for a given hole diameter:

$$\% \text{ Thread} = \# \text{ of Thread per Inch} \left[ \frac{\text{Basic Major Diameter of Thread} - \text{Drill Hole Size}}{0.0130} \right]$$

### Notes

- The above tap drill information represents probable thread percentages for the standard tap drills stocked at Allied Machine. Special insert diameters may be required in order to meet a user specific percentage of thread requirements.
- The 0.003" probable mean oversize hole condition is based on optimum cutting conditions. Probable percent of full thread may vary based on less ideal cutting conditions.
- The table and equations on this page are found in the *Machinery's Handbook*. Permission to simplify and print the equations is granted by the editor of the *Machinery's Handbook*.

### Formulas

1.	<b>RPM</b> = $(3.82 \cdot \text{SFM}) / \text{DIA}$ where: RPM = revolutions per minute (rev/min) SFM = speed (ft/min) DIA = diameter of drill (inch)
2.	<b>IPM</b> = $\text{RPM} \cdot \text{IPR}$ where: IPM = inches per minute (in/min) RPM = revolutions per minute (rev/min) IPR = feed rate (in/rev)
3.	<b>SFM</b> = $\text{RPM} \cdot 0.262 \cdot \text{DIA}$ where: SFM = speed (ft/min) RPM = revolutions per minute (rev/min) DIA = diameter of drill (inch)
4.	<b>Thrust</b> = $153,700 \cdot \text{IPR} \cdot \text{DIA} \cdot K_m$ where: Thrust = axial thrust (lbs) IPR = feed rate (in/rev) DIA = diameter of drill (inch) $K_m$ = specific cutting energy (lbs/in <sup>2</sup> )
5.	<b>Tool Power</b> = $.6283 \cdot \text{IPR} \cdot \text{RPM} \cdot K_m \cdot \text{DIA}^2$ where: Tool Power = tool power (HP) IPR = feed rate (in/rev) RPM = revolutions per minute (rev/min) $K_m$ = specific cutting energy (lbs/in <sup>2</sup> ) DIA = diameter of drill (inch)

### Material Constants

Type of Material	Hardness	$K_m$ (lbs/in <sup>2</sup> )
Plain Carbon and Alloy Steel	85 - 200 BHN	0.79
	200 - 275 BHN	0.94
	275 - 375 BHN	1.00
	375 - 425 BHN	1.15
High-Temperature Alloys	-	1.44
Stainless Steels	135 - 275 BHN	0.94
	30 - 45 RC	1.08
Cast Iron	100 - 200 BHN	0.50
	200 - 300 BHN	1.08
Copper Alloy	20 - 80 RB	0.43
	80 - 100 RB	0.72
Titanium Alloy	-	0.72
Aluminium Alloy	-	0.22
Magnesium Alloy	-	0.16

A  
DRILLING  
B  
BORING  
C  
REAMING  
D  
BURNISHING  
E  
THREADING  
X  
SPECIALS

## Coolant Recommendations | Imperial (inch)

### HSS Drill Inserts

ISO	Material	Pressure or Flow Rate	3/8" - 1/2"	33/64" - 11/16"	23/32" - 1"	1" - 1-1/4"	1-1/4" - 2"	2" - 3"	3" - 4"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	PSI	175 - 185	100 - 120	105 - 140	80 - 115	75 - 100	40 - 50	65 - 90
		GPM	2.5 - 2.6	2.8 - 3.0	4.4 - 5.2	7 - 8	12 - 14	30 - 33	38 - 44
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	PSI	165 - 170	75 - 90	75 - 95	60 - 80	55 - 75	30 - 40	50 - 65
		GPM	2.4 - 2.5	2.4 - 2.6	3.7 - 4.2	6 - 7	11 - 12	26 - 30	33 - 38
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	PSI	160 - 165	70 - 85	70 - 90	55 - 75	50 - 70	30 - 40	50 - 65
		GPM	2.3 - 2.4	2.3 - 2.6	3.7 - 4.2	5 - 6	10 - 12	26 - 30	33 - 38
	Alloy Steel 4140, 5140, 8640, etc.	PSI	160 - 165	65 - 75	65 - 80	50 - 70	45 - 60	30 - 35	40 - 50
		GPM	2.3 - 2.4	2.2 - 2.4	3.5 - 3.9	5 - 6	10 - 11	26 - 28	30 - 33
	High-Strength Alloy 4340, 4330V, 300M, etc.	PSI	150 - 155	55 - 60	45 - 50	25 - 30	25 - 30	20 - 25	40 - 50
		GPM	2.3 - 2.4	2.1 - 2.2	2.9 - 3.1	4 - 5	7 - 8	21 - 23	23 - 26
	Structural Steel A36, A285, A516, etc.	PSI	160 - 165	75 - 85	65 - 80	40 - 55	40 - 50	25 - 30	40 - 50
		GPM	2.3 - 2.4	2.4 - 2.6	3.5 - 3.9	5 - 6	9 - 10	23 - 26	30 - 33
Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	PSI	150 - 155	55 - 60	45 - 50	25 - 30	25 - 30	20 - 25	25 - 30	
	GPM	2.3 - 2.4	2.1 - 2.2	2.9 - 3.1	4 - 5	7 - 8	21 - 23	23 - 26	
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	PSI	150 - 155	60 - 65	50 - 55	30 - 35	25 - 30	25 - 30	44
		GPM	2.3 - 2.4	2.2 - 2.3	3.1 - 3.2	4 - 5	7 - 8	23 - 26	33
	Titanium Alloy	PSI	150 - 155	60 - 65	50 - 55	30 - 35	25 - 30	25 - 30	44
		GPM	2.3 - 2.4	2.2 - 2.3	3.1 - 3.2	4 - 5	7 - 8	23 - 26	33
	Aerospace Alloy S82	PSI	150 - 155	60 - 65	50 - 55	30 - 35	25 - 30	25 - 30	44
		GPM	2.3 - 2.4	2.2 - 2.3	3.1 - 3.2	4 - 5	7 - 8	23 - 26	33
M	Stainless Steel 400 Series 416, 420, etc.	PSI	171	86	75	55	51	29	45
		GPM	3	3	4	6	10	26	31
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	PSI	171	86	75	55	51	29	45
		GPM	3	3	4	6	10	26	31
	Super Duplex Stainless Steel	PSI	171	86	75	55	51	29	45
		GPM	3	3	4	6	10	26	31
H	Wear Plate Hardox, AR400, T-1, etc.	PSI	155	61	51	29	29	25	29
		GPM	2	2	3	5	8	23	26
	Hardened Steel	PSI	155	61	51	29	29	25	29
		GPM	2	2	3	5	8	23	26
K	SG / Nodular Cast Iron	PSI	160	65	61	41	35	29	35
		GPM	2	2	3	5	9	26	28
	Grey / White Iron	PSI	160	65	61	41	35	29	35
		GPM	2	2	3	5	9	26	28
N	Cast Aluminium	PSI	210	180	230	159	125	51	80
		GPM	3	4	6	9	16	33	42
	Wrought Aluminium	PSI	210	180	230	159	125	51	80
		GPM	3	4	6	9	16	33	42
	Aluminium Bronze	PSI	186	120	140	115	100	51	90
		GPM	2.5	3	5	8	14	33	44
	Brass	PSI	159	65	61	41	35	29	35
		GPM	2	2	3	5	9	26	28
	Copper	PSI	186	120	140	115	100	51	90
		GPM	2.5	3	5	8	14	33	44

#### Deep Hole Drilling Coolant Adjustment

	Holder Length				
	Extended	Long	Long Plus	XL	3XL
Pressure and Flow	1.3	1.5	2	2	3

#### Recommended Coolant Example

If the recommended pressure and flow is 150 PSI and 2.4 GPM for a standard length holder, then the adjusted pressure and flow for a 3XL holder would be 450 PSI and 7.2 GPM.

150 • 3 = 450 PSI	2.4 • 3 = 7.2 GPM
-------------------	-------------------

#### ⚠ WARNING

Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

**IMPORTANT:** The coolant pressure and flow rate recommendations above represent a good approximation to obtain optimum tool life and chip evacuation at Allied Machine recommended speeds and feeds. If lower coolant capabilities exist in a drilling application, the T-A® drilling system will still function at reduced penetration rates. Contact our Application Engineering department for a more specific recommendation of coolant requirements and/or speeds and feeds.

## Coolant Recommendations | Imperial (inch)

### Carbide Drill Inserts

ISO	Material	Pressure or Flow Rate	3/8" - 1/2"	33/64" - 11/16"	23/32" - 1"	1" - 1-3/8"	1-13/32" - 1-7/8"
P	Free-Machining Steel 1118, 1215, 12L14, etc.	PSI	195	140	160	140	155
		GPM	2.6	3.3	5.5	9	18
	Low-Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	PSI	180	105	105	110	115
		GPM	2.5	2.9	4.4	8	15
	Medium-Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	PSI	175	100	90	70	75
		GPM	2.5	2.8	4.1	7	13
	Alloy Steel 4140, 5140, 8640, etc.	PSI	165	85	100	75	70
		GPM	2.4	2.6	4.3	6	12
	High-Strength Alloy 4340, 4330V, 300M, etc.	PSI	175	115	105	75	70
		GPM	2.4	2.3	3.2	5	8
	Structural Steel A36, A285, A516, etc.	PSI	175	115	105	75	70
		GPM	2.5	3.0	4.4	6	12
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	PSI	155	60	55	40	35
		GPM	2.4	2.2	3.2	5	8
S	High-Temp Alloy Hastelloy B, Inconel 600, etc.	PSI	247	160	174	160	130
		GPM	3	4	6	9	16
	Titanium Alloy	PSI	247	160	174	160	130
		GPM	3	4	6	9	16
	Aerospace Alloy S82	PSI	247	160	174	160	130
		GPM	3	4	6	9	16
M	Stainless Steel 400 Series 416, 420, etc.	PSI	329	239	260	250	190
		GPM	3	4	7	12	20
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	PSI	329	239	260	250	190
		GPM	3	4	7	12	20
	Super Duplex Stainless Steel	PSI	329	239	260	250	190
		GPM	3	4	7	12	20
H	Wear Plate Hardox, AR400, T-1, etc.	PSI	210	75	70	49	45
		GPM	3	2	4	5	10
	Hardened Steel	PSI	210	75	70	49	45
		GPM	3	2	4	5	10
K	SG / Nodular Cast Iron	PSI	225	104	90	90	80
		GPM	3	3	4	7	13
	Grey / White Iron	PSI	225	104	90	90	80
		GPM	3	3	4	7	13
N	Cast Aluminium	PSI	350	319	315	284	200
		GPM	4	5	8	12	20
	Wrought Aluminium	PSI	350	319	315	284	200
		GPM	4	5	8	12	20
	Aluminium Bronze	PSI	290	239	239	220	174
		GPM	3	4	7	11	19
	Brass	PSI	350	319	315	284	200
		GPM	4	5	7	12	20
	Copper	PSI	290	239	239	220	174
		GPM	3	4	7	11	19

### Deep Hole Drilling Coolant Adjustment

	Holder Length				
	Extended	Long	Long Plus	XL	3XL
Pressure and Flow	1.3	1.5	2	2	3

### Recommended Coolant Example

If the recommended pressure and flow is 150 PSI and 2.4 GPM for a standard length holder, then the adjusted pressure and flow for a 3XL holder would be 450 PSI and 7.2 GPM.

$150 \cdot 3 = 450 \text{ PSI}$	$2.4 \cdot 3 = 7.2 \text{ GPM}$
---------------------------------	---------------------------------

#### ⚠ WARNING

Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

**IMPORTANT:** The coolant pressure and flow rate recommendations above represent a good approximation to obtain optimum tool life and chip evacuation at Allied Machine recommended speeds and feeds. If lower coolant capabilities exist in a drilling application, the T-A® drilling system will still function at reduced penetration rates. Contact our Application Engineering department for a more specific recommendation of coolant requirements and/or speeds and feeds.

A  
DRILLING  
B  
BORING  
C  
REAMING  
D  
BURNISHING  
E  
THREADING  
X  
SPECIALS

## Troubleshooting Guide

A DRILLING	Potential Problem																						Possible Solutions
	Accelerated corner wear	Barber pole	Bell-mouth hole	Insert chipping	Blue chips	Built-up Edge (BUE)	Chatter	Chip packing	Chipping of point	Damaged or broken tools	Excessive margin wear	High flank wear	Hole lead off	Hole out of position	Hole out of round	Notching of insert	Oversize hole	Poor hole finish	Poor tool life	Power spikes - Load meter	Retract spiral	Step burned on insert	
B BORING	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	<ul style="list-style-type: none"> <li>Start with short holder and drill a minimum depth equal to 2xD (see page A30: 146 for instructions).</li> <li>Spot hole with stub tool of same or greater included angle as T-A® drill insert.</li> <li>Decrease feed a minimum of 50% until establishing full diameter.</li> <li>Use special holder with wear pads or chrome bearing area to work with drill bushings.</li> </ul>
C REAMING							7		9	10	11		13		15						21		<ul style="list-style-type: none"> <li>Spot face surface to provide a flat entry surface.</li> <li>Spot hole with stub tool of same or greater included angle as T-A® drill insert.</li> <li>Decrease feed a minimum of 50% until establishing full diameter.</li> <li>Use special holder with wear pads or chrome bearing area to work with drill bushings.</li> </ul>
D BURNISHING	1		3				7		9	10	11		13				17	18			21		<ul style="list-style-type: none"> <li>Align spindle and turret or tailstock.</li> <li>Repair spindle.</li> <li>Spot hole with stub tool of same or greater included angle as T-A® drill insert.</li> </ul>
E THREADING		2	3	4			7		9	10			13	14							21		<ul style="list-style-type: none"> <li>Spot hole with stub tool of same or greater included angle as T-A® drill insert.</li> <li>Reduce penetration rate to fall within the physical limits of the machine or setup (<b>NOTICE:</b> Do not reduce feed below threshold of good chip formation).</li> <li>Use special holder with wear pads or chrome bearing area to work with drill bushings.</li> <li>Use tougher tool steel grades with high wear-resistant coatings.</li> </ul>
F SPECIALS							7		10	11					15			18			21		<ul style="list-style-type: none"> <li>Provide additional support for the work piece. Reduce penetration rate to fall within the physical limits of the machine or setup (<b>NOTICE:</b> Do not reduce feed below threshold of good chip formation).</li> <li>Use tougher tool steel grades with high wear-resistant coatings.</li> </ul>
					5	6		8		10		12						17	18	19	20	22	<ul style="list-style-type: none"> <li>Run coolant through tool holder when drilling greater than one times diameter.</li> <li>Increase coolant pressure and volume through the tool holder.</li> <li>Reduce penetration rate to fall within the coolant limitations (<b>NOTICE:</b> Do not reduce feed below threshold of good chip formation).</li> <li>Add a peck cycle to help clear chips.</li> </ul>
	1																						

**⚠ WARNING** Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.













Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.

	Potential Problem																						
	Accelerated corner wear	Barber pole	Bell-mouth hole	Insert chipping	Blue chips	Built-up Edge (BUE)	Chatter	Chip packing	Chipping of point	Damaged or broken tools	Excessive margin wear	High flank wear	Hole lead off	Hole out of position	Hole out of round	Notching of insert	Oversize hole	Poor hole finish	Poor tool life	Power spikes - Load meter	Retract spiral	Step burned on insert	
Setup Condition	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	Possible Solutions
Interrupted cuts. Entry or exit surfaces that are not perpendicular to the spindle (draft angles, stepped surfaces, cross holes, and cast or forged surfaces).				4			7		9	10	11		13	14	15		17	18	19				<ul style="list-style-type: none"> <li>• Premill (spot face) entry or exit surface to remove interruption.</li> <li>• Spot hole with stub tool of same or greater included angle as T-A® drill insert.</li> <li>• Decrease feed as much as 50% through entry or exit interruption.</li> <li>• Use short holders in low impact entry cuts.</li> </ul>
Material harder than expected or running tools beyond recommended speeds.	1				5	6				10		12							19			22	<ul style="list-style-type: none"> <li>• Reduce speed if a step is worn in the insert, calculate SFM at the worn diameter. Reduce this value by 10% and apply this new value to the original tool diameter.</li> <li>• Increase coolant pressure and volume.</li> <li>• Improve coolant condition by use of quality products and regular maintenance.</li> <li>• Select an insert grade (premium, super cobalt, or carbide) or coating (TiAlN, TiCN, or AM200®) that is more wear-and heat-resistant.</li> </ul>
Poor material micro-structure or foreign particles (forgings and castings that have not been normalised or annealed, poorly prepared steel, flame cut parts and sand casting).				4		6				10		12	13			16			19				<ul style="list-style-type: none"> <li>• Compare performance of other tools for similar wear problems, which may indicate poor micro-structure. Anneal or normalise parts to improve micro-structure for machining.</li> <li>• To improve tool life in materials with poor micro-structure, try carbide grades.</li> <li>• For hard spots or inclusions, use the tougher insert steel grade with high wear-resistant coatings (TiAlN, TiCN, AM200®).</li> <li>• Reduce feeds (<b>NOTICE:</b> Do not reduce feed below threshold of good chip formation).</li> </ul>
Poor chip control.								8		10	11		13				17	18	19	20			<ul style="list-style-type: none"> <li>• Increase feed to recommended levels. Contact Allied's Application Engineering team for technical recommendations.</li> <li>• Increase coolant pressure and volume.</li> <li>• Improve coolant condition by use of quality products and regular maintenance.</li> <li>• See pages A30: 4 - 5 for special purpose geometries.</li> </ul>
Spot drilled holes with included angle less than that matching T-A® or cored holes.	1			4			7						13			16			19				<ul style="list-style-type: none"> <li>• Spot hole with short tool of same or greater included angle as T-A® drill insert.</li> <li>• Reduce feed (<b>NOTICE:</b> Do not reduce feed below threshold of good chip formation)</li> <li>• If possible, drill from solid.</li> </ul>
Use of high wear-resistant insert grades.				4						10													<ul style="list-style-type: none"> <li>• Use tougher grade of T-A® (from carbide to cobalt to HSS). See wear versus toughness chart on page A30: 9.</li> <li>• Increase rigidity of setup.</li> </ul>



## Deep Hole Drilling Guidelines

For Lengths Greater Than 9xD (including Standard Plus, Extended Length, Long Length, Long Plus Length, XL, 3XL, and Special Length)

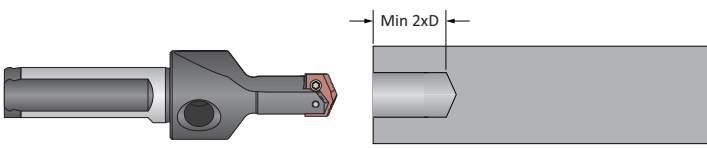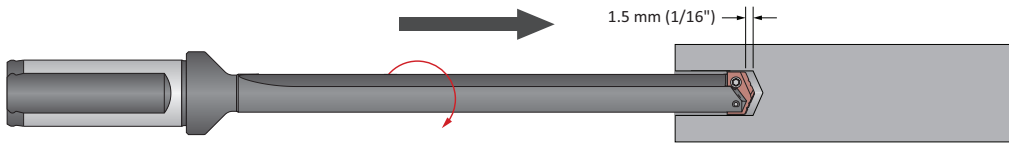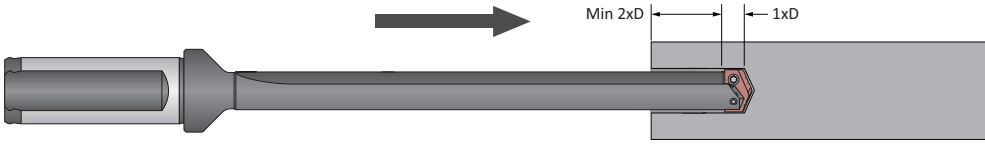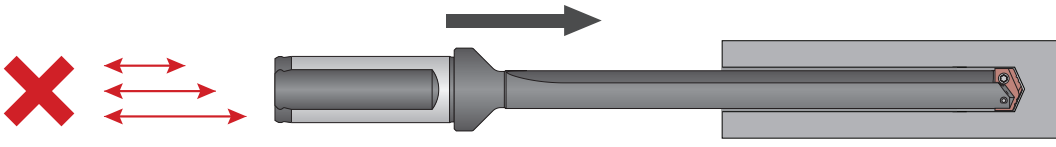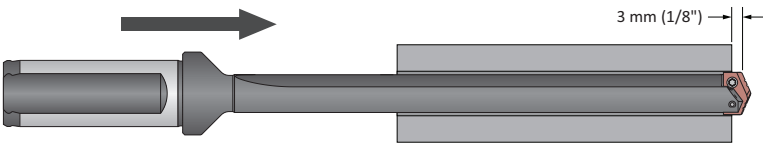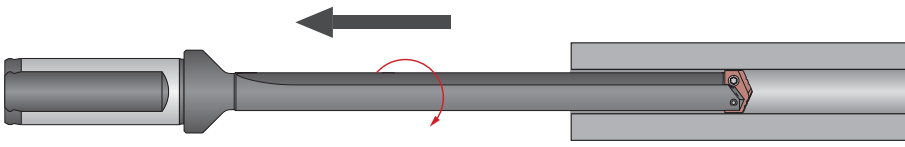A DRILLING	<p><b>1. Pilot Hole</b> 100% RPM 100% mm/rev (IPR)</p>	<p>Establish the pilot hole using the same diameter short drill to a depth of 2xD minimum. Utilise a pilot drill with the same or larger included point angle.</p> 	<p><b>Coolant ON</b></p> 
B BORING	<p><b>2. Feed-in</b> 50 RPM max 300 mm/min (12 IPM)</p>	<p>Feed the longer drill within 1.5 mm (1/16") short of the established pilot hole bottom at a <b>maximum of 50 RPM</b> and 300 mm/min (12 IPM) feed rate.</p> 	<p><b>Coolant OFF</b></p> 
C REAMING	<p><b>3. Deep Hole Transition Drilling</b> 50% RPM 75% mm/rev (IPR)</p>	<p>Drill additional 1xD past the bottom of the pilot hole at 50% reduction of recommended speed and 25% reduction of recommended feed. Minimum of 1 second dwell is required to meet full speed before feeding.</p> 	<p><b>Coolant ON</b></p> 
D BURNISHING	<p><b>4. Deep Hole Drilling - Blind</b> 100% RPM 100% mm/rev (IPR)</p>	<p>Drill to full depth at recommended speed and feed for longer drill according to Allied speed and feed charts. <b>No peck cycle recommended.</b></p> 	<p><b>Coolant ON</b></p> 
E THREADING	<p><b>5. Deep Hole Drilling - at Breakout</b> 50% RPM 75% mm/rev (IPR)</p>	<p><b>For through holes only:</b> Reduce speed by 50% and feed by 25% prior to breakout. Do not breakout more than 3 mm (1/8") past the full diameter of the drill.</p> 	<p><b>Coolant ON</b></p> 
F SPECIALS	<p><b>6. Drill Retract</b> 50 RPM max</p>	<p>Reduce speed to a <b>maximum of 50 RPM</b> before retracting from the hole.</p> 	<p><b>Coolant OFF</b></p> 

**1. WARNING** Tool failure can cause serious injury. To prevent:

- When using holders without support bushing, use a short T-A® holder to establish an initial hole that is a minimum of 2 diameters deep.
- Do not rotate tool holder more than 50 RPM unless it is engaged with the workpiece or fixture.

Visit [www.alliedmachine.com/DeepHoleGuidelines](http://www.alliedmachine.com/DeepHoleGuidelines) for the most up-to-date information and procedures. Factory technical assistance is available for your specific applications through our Application Engineering Team.





## Warranty Information



Allied Machine & Engineering ("Allied Machine") warrants to original equipment manufacturers, distributors, industrial and commercial users of its products for one year from the original date of sale that each new product manufactured or supplied by Allied Machine shall be free from defects in material and workmanship.

Allied Machine's sole and exclusive obligation under this warranty is limited to, at its option, without additional charge, replacing or repairing this product or issuing a credit. For this warranty to be applied, the product must be returned freight prepaid to the plant designated by an Allied Machine representative and which, upon inspection, is determined by Allied Machine to be defective in material and workmanship.

Complete information as to operating conditions, machine, setup, and the application of cutting fluid should accompany any product returned for inspection. This warranty shall not apply to any Allied Machine products which have been subjected to misuse, abuse, improper operating conditions, improper machine setup or improper application of cutting fluid or which have been repaired or altered if such repair or alteration, in the judgement of Allied Machine, would adversely affect the performance of the product.

**THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Allied Machine shall have no liability or responsibility for any claim, whether in contract, tort or otherwise, for any loss or damage arising out of, connected with, or resulting from the manufacture, sale, delivery or use of any product sold hereunder, in excess of the cost of replacement or repair as provided herein.

Allied Machine shall not be liable in contract or in tort (including, without limitation, negligence, strict liability or otherwise) for economic losses of any kind or for any special, incidental, indirect, consequential, punitive or exemplary damages arising in any way out of the performance of, or failure to perform this agreement.

**ALL PRICES, DELIVERIES, DESIGNS, AND MATERIALS ARE SUBJECT TO CHANGE WITHOUT NOTICE.**



Allied Machine & Engineering Co. Europe Ltd. is registered to ISO 9001:2015 by bsi.



Allied Machine & Engineering is registered to ISO 9001:2015 by DQS



Wohlhaupter GmbH is registered to ISO 9001:2015 by QA TECHNIC

## Europe

### Allied Machine & Engineering Co. (Europe) Ltd.

93 Vantage Point  
Pensnett Estate  
Kingswinford  
West Midlands  
DY6 7FR England

**Phone:**

+44 (0) 1384.400900

### Wohlhaupter GmbH

Maybachstrasse 4  
Postfach 1264  
72636 Frickenhausen  
Germany

**Phone:**

+49 (0) 7022.408.0

**Fax:**

+49 (0) 7022.408.212

## United States

### Allied Machine & Engineering

120 Deeds Drive  
Dover OH 44622  
United States

**Phone:**

+1.330.343.4283

**Fax:**

+1.330.602.3400

**Toll Free USA and Canada:**

800.321.5537

**Toll Free USA and Canada:**

800.223.5140

### Allied Machine & Engineering

485 W Third Street  
Dover OH 44622  
United States

**Phone:**

+1.330.343.4283

**Fax:**

+1.330.364.7666  
(Engineering Dept.)

**Toll Free USA and Canada:**

800.321.5537

## Asia

### Wohlhaupter India Pvt. Ltd.

B-23, 3rd Floor  
B Block Community Centre  
Janakpuri, New Delhi - 110058  
India

**Phone:**

+91 (0) 11.41827044

Your local Allied Machine representative:

[www.alliedmachine.com](http://www.alliedmachine.com)

Allied Machine & Engineering Co. (Europe) Ltd is registered to **ISO 9001:2015** by bsi.

Allied Machine & Engineering is registered to **ISO 9001:2015** by DQS

Wohlhaupter GmbH is registered to **ISO 9001:2015** by QTA TECHNIC

